
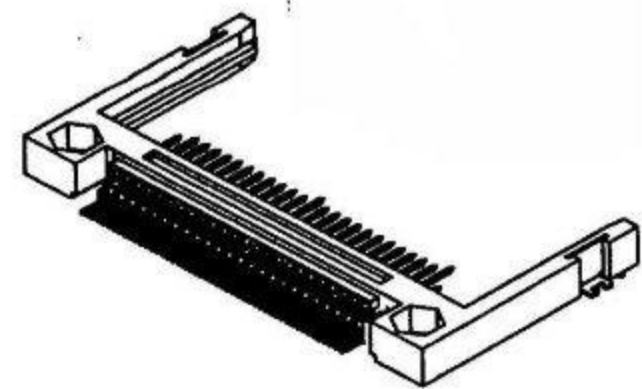


ELECTRICAL

Item	Test Method	Standard
Contact Resistance(w/bulk)	EIA-364-23A	40 milliohms maximum, initial 20 milliohms maximum change, throughout testing.
Current Rating	IEC-512-PT3	0.5 Amperes per contact, without exceeding 30°C temperature rise above ambient.
Insulation Resistance	EIA-364-21A	1000 Megohms minimum initial, 100 Megohms minimum after 1 minute @ 500 Vdc.
Dielectric Withstanding Voltage	EIA-364-20A	No shorting during 1 minute @ 500 Vac rms, with 1 mA maximum current leakage.

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

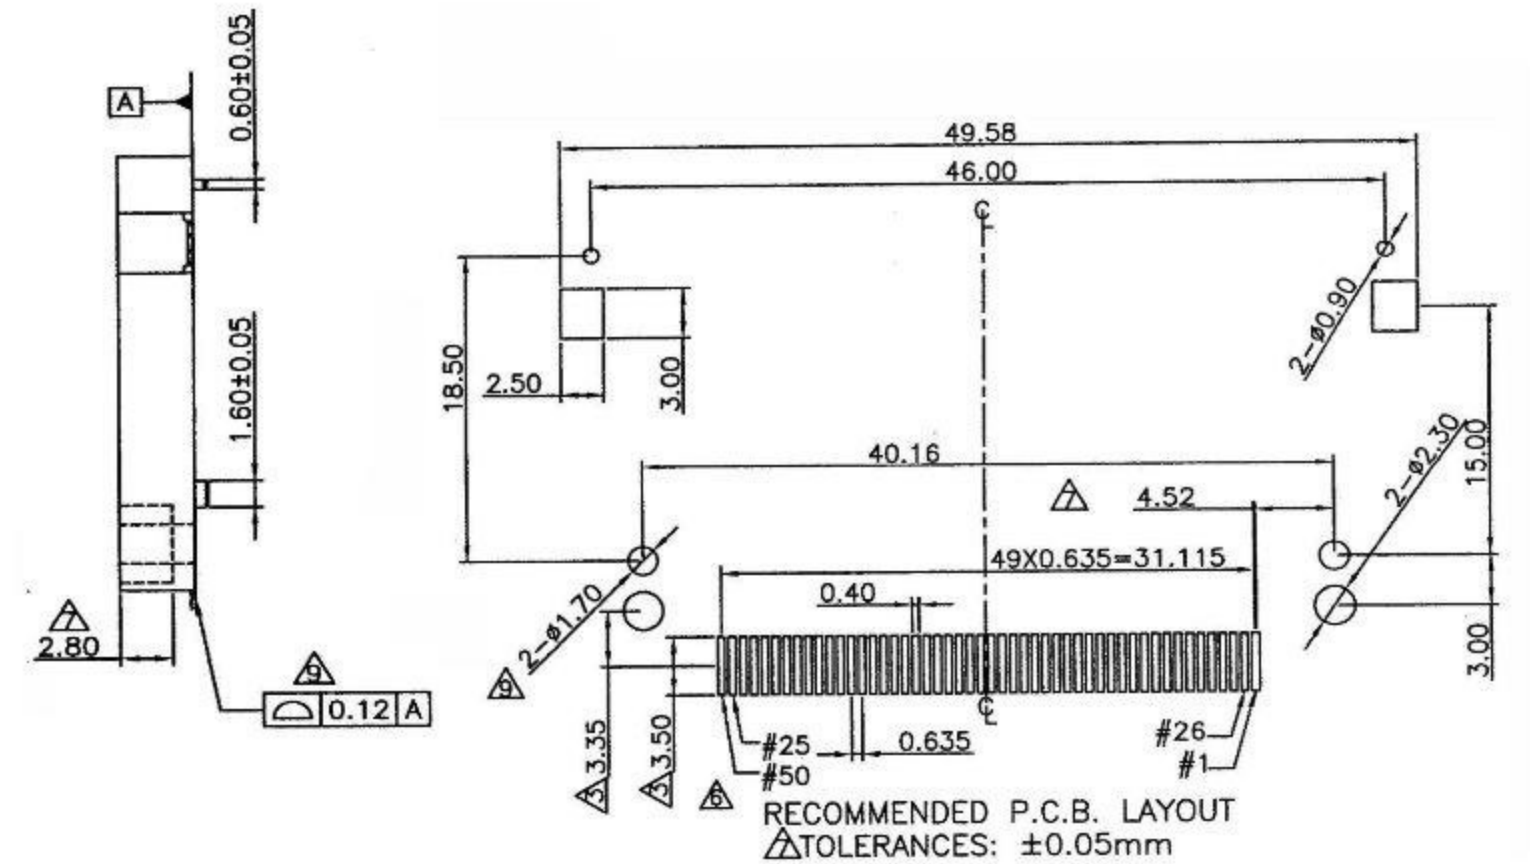

- NOTES**
- ▲ MATERIAL
Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Mount Ear: Copper Alloy
 - ▲ CONTACT PLATING
Underplate: 50u"~100u" Nickel
Contact Area: 15u" Selective Gold
Solder Tails Area: 100u"~200u" Tin/Lead (Brighten Tin) or 100u"~200u" Tin/Lead Free (Brighten Tin/Matten Tin)


RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 BETTY

DWG. 製圖 KAREN

DATE 制表日 2013/03/25



SCALE 比例 參考

UNIT 單位 MM

PAGE 張數 1 OF 1

TOLERANCE 公差

ANG. 角度 ±5°
0. ±0.5
.0 ±0.3
.00 ±0.2

SIZE 紙張尺寸 A4

REV. 版本 B

PART NAME 品名

CF CARD SOCKET SMT SLIM TYPE 50 MALE
STAND ON 0mm W/O NUT SELECTIVE GOLD 15U"
PLATING WHITE INSULATOR ROHS

PART NO.

料號 C7753-50BANHWOR