
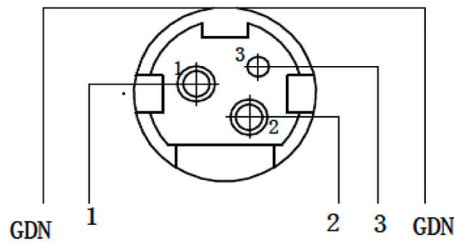


Specification

Ambient temperature: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
 Relative humidity: 95%(40°C)
 Rated voltage: 1&2:20V DC 7.5A MAX; 3:20V DC 1A
 Contact resistance: $\leq 30\text{m}\Omega$
 Insulation resistance: $\geq 100\text{M}\Omega$
 Withstand voltage strength: 500V AC (50Hz) 1min
 Insertion & Withdrawal force: 10~50N
 Life Test : ≥ 5000 Cycles

PCB板安装孔图

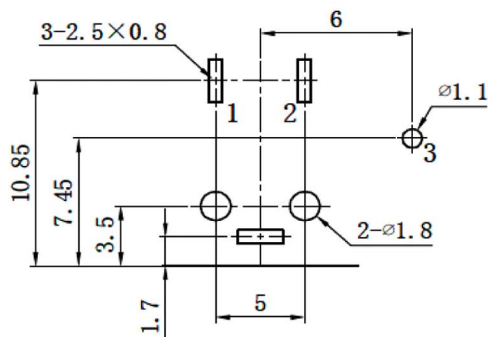

电路图

NO.	NAME	Q'TY	MATERIAL	FINISH
6	Ring	1	H62 BRASS Y=0.35mm	D. Cu/Sn
5	Right long needle	1	H62 BRASS Y=0.28mm	D. Cu/Sn
4	Left short needle	1	H62 BRASS Y=0.28mm	D. Cu/Sn
3	Curved needle	1	H62 BRASS Y=0.35mm	D. Cu/Sn
2	Back cover	1	PBT	Black Color
1	Base	1	PBT	Black Color

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	Hedy	DATE 制表日 2018/11/07	SCALE 比例 参考	UNIT 单位 MM	PAGE 张数 1 / 1	TOLERANCE XXX ±0.10 XX ±0.15 X ±0.25 ANGULAR: ±3°	PART NAME 品名 POWER DIN JACK 3P WITH FULLY PLASTIC WITH FLAT PIN TIN PLATING MATERIAL : PBT UL94-V0 BLACK INSULATOR ROHS
			REV. 版次 A		PART NO. 料號 C8023-03FPFTB0R		