


T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

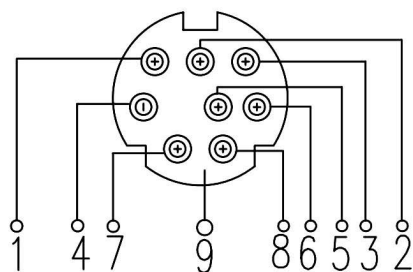

SCHEMATIC DIAGRAM

UNLESS OTHERWISE TOLECIFIED TOLERANCE ON DECIMAL:±0.3

Specification:
Rated Voltage / Rateed Current : AC 100V 1A or DC 12V 2A MAX
Operating Temp: -40°C~+85°C
Insulation Resistance:50MΩ min
Dielectric Withstanding Voltage: 250V AC For 1min
Contact Resistance:30mΩ

4	COAT	1	C2680	Cu/Sn PLATED
3	CONTACT FOOT	8	C5191	Ag PLATED
2	COVER	1	C2680	Cu/Sn PLATED
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 0 ± .00 ± .000 ±	PART NAME 品名 MINI DIN JACK WITH SCREW 8P WITH FULLY SHIELDED HOOK PIN WITH BOARDLOCK BLACK INSULATOR SELECTIVE GOLD PLATING ROHS
DWG. 製圖 ABBY	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 C8098-08YHSB00R
DATE 制表日 2015/05/19	PAGE 張數 1 OF 1	REV. 版次 A	