


**Specification:**

- Contact Resistance: 30m Ohm Max.
- Insulation Resistance: 100M Ohm Min.AT 500V DC
- Rated Voltage And Current: DC12V.2A Max;AC 100V.1A Max
- Dielectric Withstanding Voltage: 250V AC For 1 Minute
- Durability (Life Test): 100 Cycles
- Insertion Force: 4.0KG Maximum.
- Extraction Force: 0.9KG Minimum.

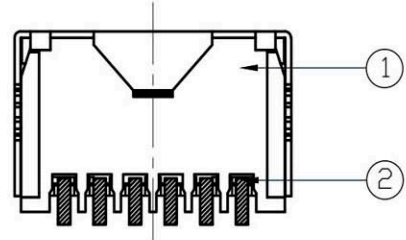

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	NYLON PA9T G.F.	BLACK	1
2	CONTACT	PHOS. BRONZE T:0.2	Gold:1~3u"; Ni:40~60u"; TIN:120u" (100% pure Tin of lead free plating)	6
3	SHIELD	BRASS T:0.3	NICKEL PLATED Ni:80~120u"	1
4	BACK COVER	NYLON PA9T G.F.	BLACK	1

<b>RoHS Compliant</b> APPD. 核准 DWG. 製圖 DATE 制表日 2020/11/11	<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>		<b>PART NAME 品名</b> MINI DIN JACK SMT TYPE 6P WITH FULLY SHIELDED BOARDLOCK FOOT WITH PLASTIC POST BLACK COLOR SELECTIVE GOLD PLATING REEL PACKING ROHS <b>PART NO.</b> 料號 C8099-06YBSBPRR	
	SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 5°		SIZE. 紙張尺寸 A 4 REV. 版本 A
	HELLEN Helen			
	2020/11/11			