


Pin Hole Layout  
(Jack Bottom View)

**SPECIFICATIONS:**

Contact Resistance : 30mΩ max  
 Current Rating : Max 2.0A , 16V DC  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

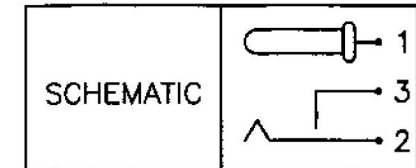

6.	Cover	PA9T	1	Black Color
5.	Housing	PA9T	1	Black Color
4.	Pin(2.5φ)	Copper	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.25T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.  
核准 BETTY

DWG.  
製圖 BETTY

DATE 制表日  
2011/03/04

SCALE  
比例 參考

UNIT  
單位 M M

PAGE  
張數 1 OF 1

TOLERANCE  
容許公差  
0 ±0.3  
.00 ±  
ANG. ±

SIZE.  
紙張尺寸 A 4

REV.  
版次 A

PART NAME 品名  
DC POWER JACK PIN:2.5mm NORMAL OPEN  
FLAT TYPE SILVER PLATED BLACK INSULATOR  
WITHOUT LOCATING PEG ROHS

PART NO.  
料號 C8125-DPVBN000R