


SPECIFICATIONS:

1. Rating : DC 30V \ 0.5A
2. Contact Resistance : $\leq 0.03\Omega$
3. Insulation Resistance : $\geq 100M\Omega$
4. Dielectric Withstanding Voltage : AC500V (50Hz)/ min.
5. Insertion & Extraction Force : 3-20N
6. Operating Temperature : -30~70°C
7. Durability (Life Test) : 5000 Cycles

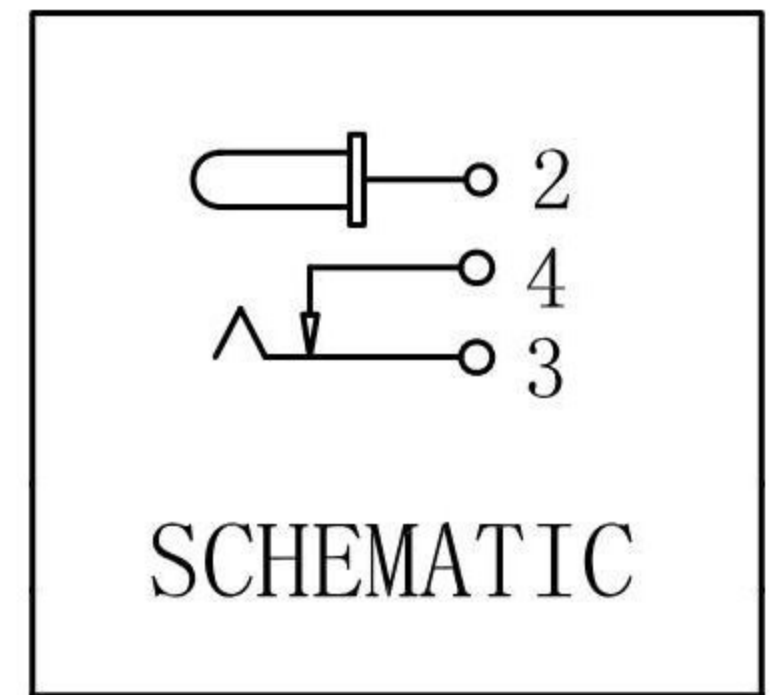

4	TIP SPRING	1	PHOSPHOR BRONZE	T=0.2 Cu/Sn PLATED
3	SHUNT PIN	1	BRASS	T=0.3 Cu/Sn PLATED
2	PIN	1	BRASS	T=0.3 Cu/Sn PLATED
1	HOUSING	1	PBT	BLACK
NO.	P/N	QTY	MATERIAL	SPEC

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE X. ±0.20 XX ±0.10 XXX ±0.05 X* ±5° .X* ±2°	PART NAME 品名 DC POWER JACK PIN :1.3mm NORMAL CLOSE FLAT TYPE TIN PLATED BLACK INSULATOR W/ LOCATING PEG ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C8128-ACTBY000R
DATE 制表日 2018/05/24	PAGE 張數 1 OF 1	REV. 版次 A	