



TEMPERATURE: -40°C~70°C
 RATED LOAD: DC50V 0.2A
 WITHSTAND VOLTAGE: AC500V(50Hz)/min
 CONTACT RESISTANCE: ≤30mΩ
 INSULATION RESISTANCE: ≥100MΩ
 WITHDRAW FORCE: 3-30N
 LIFE TEST: 5,000 cycles

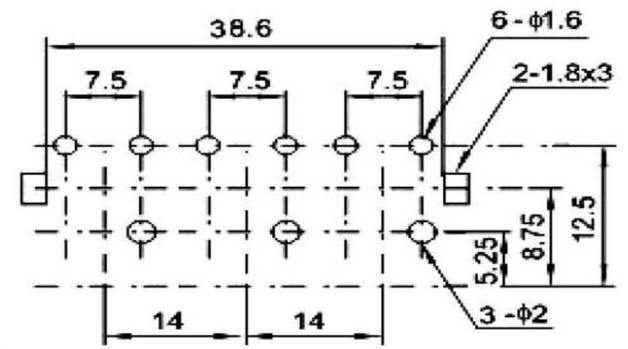

*Upper row: Green/Blue/Red
 Bottom row: Yellow/Rd/White*

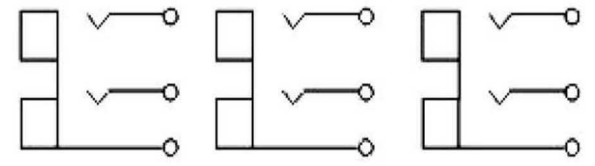

6				
5	OUTER CONTACT	BRASS	3	Cu/Sn PLATED
4	TERMINAL	BRASS	6	Cu/Sn PLATED
3	COVER	ABS	3	BLACK
2	WASHER	PBT	6	
1	HOUSING	ABS	1	RED
NO.	DESCRIPTION	MATERIAL	QTY.	PLATING

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	 SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 RCA JACK 6 PORTS RIGHT ANGLE TYPE TIN PLATED UPPER ROW: GREEN/BLUE/RED BOTTOM ROW: YELLOW/RED/WHITE TRAY PACKING ROHS
DWG. 製圖 Helen	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. C8192-06RTB000R
DATE 制表日 2013/4/25	PAGE 張數 1 OF 1	REV. 版次 B	料號 C8192-06RTB000R