

PCB EDGE  
PCB LAYOUT  
(COMPONENT SIDE)

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.


Dielectric Withstanding Voltage:

750V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

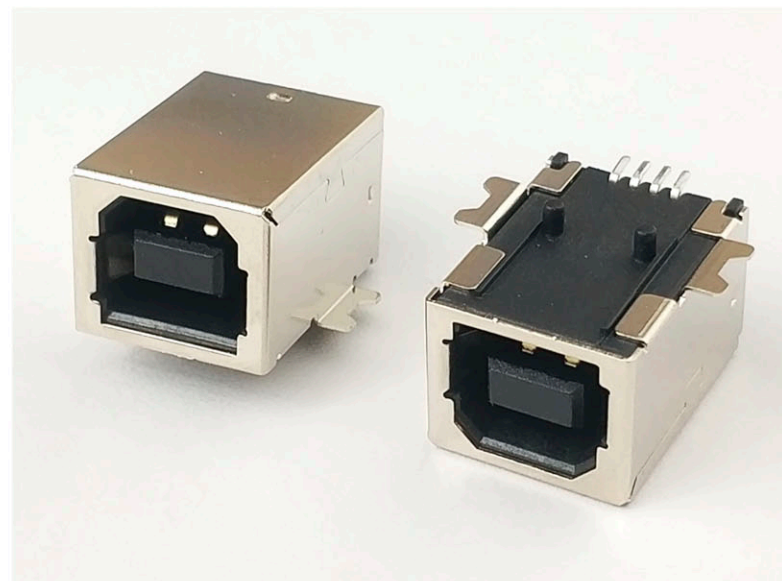

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	BLACK OR WHITE	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u"or30u";NI:40~60u";TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	NI:50u" MINIMUM.

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD.  
核准  
DWG.  
製圖  
DATE  
2020/3/4

SCALE  
比例  
UNIT  
單位  
PAGE  
張數  
1 OF 1

TOLERANCE  
容許公差  
0 ± 0.35  
.00 ± 0.25  
ANG. ± 3°  
SIZE.  
紙張尺寸  
A 4  
REV.  
版本  
C  
PART NAME 品名  
USB B TYPE DIP TYPE 4P FEMALE SMT TYPE  
NICKEL SHELL(SELECTIVE GOLD OR SELECTIVE  
GOLD 30u" ) WHITE OR BLACK COLOR ROHS  
PART NO.  
料號 C8317-04BFD(S, I)(B, W)XR