


NO.	APPLICATION	TYPICAL WIRING ASSIGNMENT
P1	VBUS	RED
P2	D-	WHITE
P3	D+	GREEN
P4	ID	RA PLUG-ID
P5	GND	BLACK

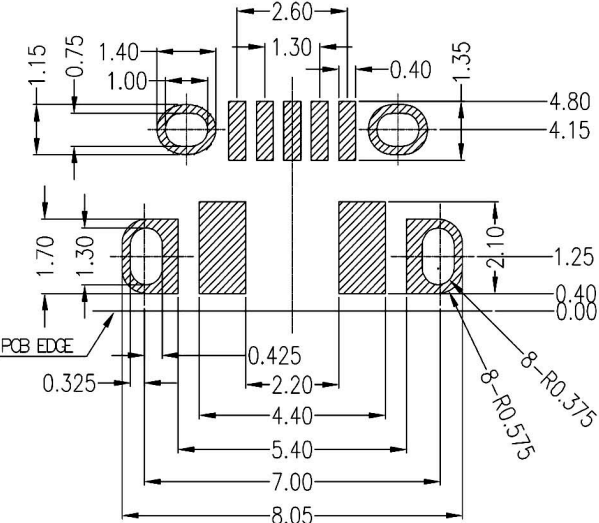

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: STAINLESS STEEL, NICKEL OR TIN PLATED
 TERMINAL: COPPER ALLOY, GOLD PLATED OVER ALL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+105°C

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE. 紙張尺寸	MICRO USB B TYPE 5PIN FEMALE PIN FOOT:SMT TYPE
DATE 制表日	PAGE 張數	REV. 版次	SHELL FOOT:DIP TYPE WITHOUT LOCATING PEG
2023/02/17	1 OF 1	A	BLACK INSULATOR MATERIAL:LCP REEL PACKING ROHS
Betty		PART NO. 料號	
		C8692-05BFBXNXRR	