
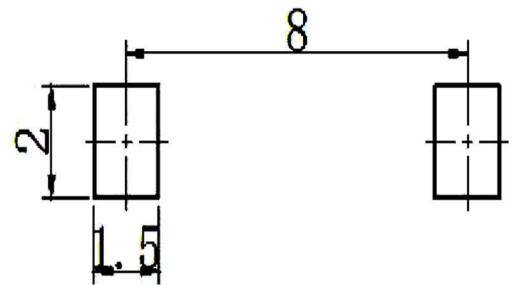


RATING: DC12V 50mA
 WITHSTAND VOLTAGE: AC250V(50Hz)/min
 CONTACT RESISTANCE: 100mΩ max
 INSULATION RESISTANCE: 100MΩ min
 TRAVEL TO CLOSURE: 0.25±0.1mm
 OPERATION FORCE: 250gf±50gf
 LIFE TEST: 100,000 cycles

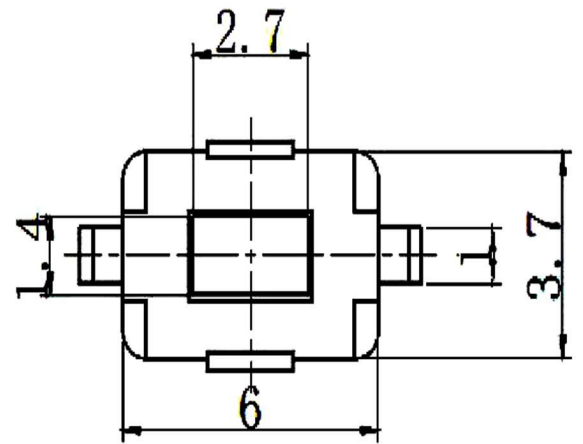

6				
5	TERMINAL	BRASS	2	Ag-PLATED
4	SPRING	SUS	1	Ag-PLATED
3	KNOB	PA66	1	RED
2	COVER	SUS	1	
1	HOUSING	PA66	1	BLACK
NO.	DESCRIPTION	MATERIAL	QTY.	PLATING

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty		TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 3.7mm X 6.0mm TACT SWITCH SMT TYPE KNOB HEIGHT : 2.5mm OPERATING FORCE:250gf WITHOUT LOCATING PEG BUTTON COLOR:RED COLOR REEL PACKING ROHS
DWG. 製圖 ABBY	SCALE 比例 參考	SIZE 紙張尺寸 A 4	PART NO. 料號 C8711-RCRR0000R
DATE 制表日 2016/01/15	UNIT 單位 M M	REV. 版次 A	
PAGE 張數 1 OF 1			