


FEATURES:

- . 2-25 Circuits
- . With or Without locking ramp and Polarizing Rib
- . Nylon [UL94V-2]
- . Mates with .045" [1.14mm] pins
- . Through and end Type

SPECIFICATIONS:

- . Current rating: 7A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -40°C ~ +105°C .
- . Contact resistance: Initial Value/10m Ω max.
After environmental testing /20m Ω max.
- . Insulation resistance: 1000 M Ω min
- . Withstand Voltage: 1500V AC/minute
- . Applicable wire: AWG #18 ~ #26

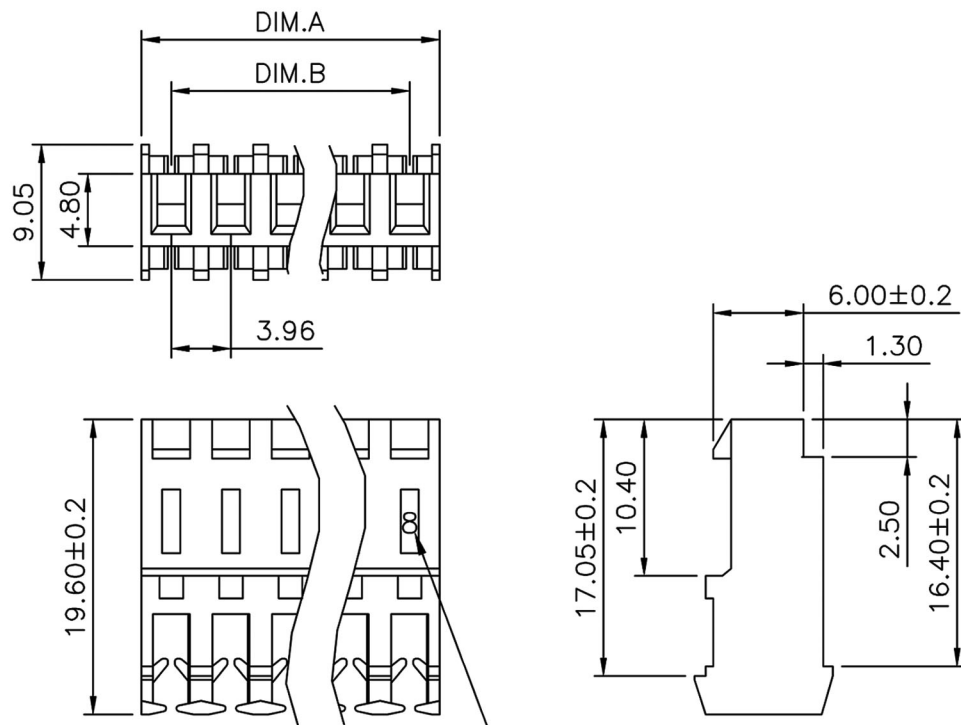

Wire Gauge 8 ⇒ # 18AWG
 0 # 20AWG
 2 # 22AWG
 4 # 24AWG
 6 # 26AWG

Circuits	DIM.A	DIM.B	Tolerances
02	7.92	3.96	±0.15
03	11.88	7.92	
04	15.84	11.88	
05	19.80	15.84	
06	23.76	19.80	±0.20
07	27.72	23.76	
08	31.68	27.72	
09	35.64	31.68	
10	39.60	35.64	±0.25
11	43.56	39.60	
12	47.52	43.56	
13	51.48	47.52	

Circuits	DIM.A	DIM.B	Tolerances
14	55.44	51.48	±0.25
15	59.40	55.44	
16	63.36	59.40	
17	67.32	63.36	±0.30
18	71.28	67.32	
19	75.24	71.28	
20	79.20	75.24	
21	83.16	79.20	±0.35
22	87.12	83.16	
23	91.08	87.12	
24	95.04	91.08	
25	99.00	95.04	

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2019/10/14	Hedy	TOLERANCE X.X ±0.20 X.XX ±0.10 X.XXX ±0.05 Angle X ± 2° XX ± 1°	PART NAME 品名 3.96mm HOUSING XXP XXAWG TIN PLATED WHITE COLOR(UL94V2) FEED THROUGH TYPE ROHS
SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 / 1	SIZE 紙張尺寸 A 4 REV. 版次 B	PART NO. 料號 H8396-XXPXTW01R	