


Current Rating: 2 Amps  
 Insulator Resistance: 1000 Megohms min  
 Dielectric Withstanding AC 500 V  
 Contact Resistance: 20m ohms max.  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Finish: Tin, Gold Plated  
 Standard: Nylon-6T  
 Standard: Gold Flash all over

Recommended P.C. Board  
 Hole Layout

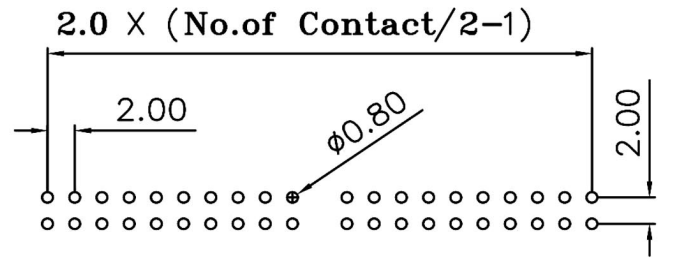

CONTACTS	A	B	C	CONTACTS	A	B	C
10	10.0	25.9	8.0	26	26.0	41.9	24.0
12	12.0	27.9	10.0	30	30.0	45.9	28.0
14	14.0	29.9	12.0	32	32.0	47.9	30.0
16	16.0	31.9	14.0	34	34.0	49.9	32.0
20	20.0	35.9	18.0	40	40.0	55.9	38.0
22	22.0	37.9	20.0	44	44.0	59.9	42.0
24	24.0	39.9	22.0	50	50.0	65.9	48.0

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 DWG. 製圖 DATE 制表日 2017/05/05	Betty	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3° SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1	PART NAME 品名 2.0x2.0mm SHROUDED HEADER XXPIN STRAIGHT TYPE SHORT LATCH GOLD FLASH PLATING BLACK INSULATOR ROHS PART NO. C9000-XXSGB000R 料號