


SPECIFICATIONS

- Current Rating : 1.5AMP
- Operation Temperature: -40° C to +105° C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage : AC 500V
- Insulator Material : Polyester (UL94V-0)
Standard: NYLNO-6T
- Contact Material : Brass
- Contact plating : Au

Dimensions list

Contacts Per row	Dimensions	
	A	B
10	26.00	8.0
16	32.00	14.0
20	36.00	18.0
26	42.00	24.0
30	46.00	28.0
44	60.00	42.0

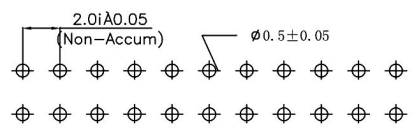

PCB LAYOUT

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考 UNIT 單位 M M PAGE 張數 1 OF 1	TOLERANCE X: ±0.30 X.X: ±0.20 X*: ±1' X.XX: ±0.15 X.X*: ±0.05 X.XXX: ±0.05 SIZE 紙張尺寸 A 4 REV. 版次 A	PART NAME 品名 2.0x2.0mm SHROUDED HEADER XXP STRAIGHT TYPE LONG LATCH GOLD FLASH PLATING BLACK INSULATOR NYLOT 6T ROHS PART NO. 料號 C9001-XXSGLB00R
DATE 制表日 2017/11/21			