
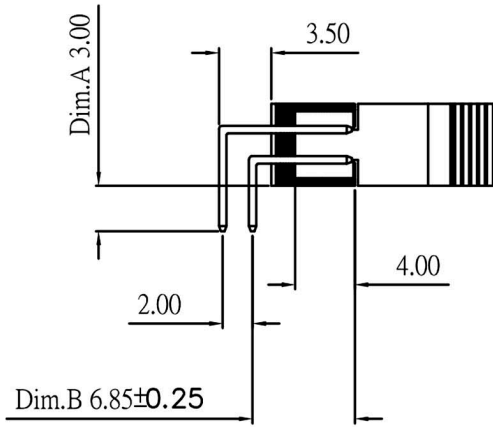


Recommended P.C. Board
SMD Layout

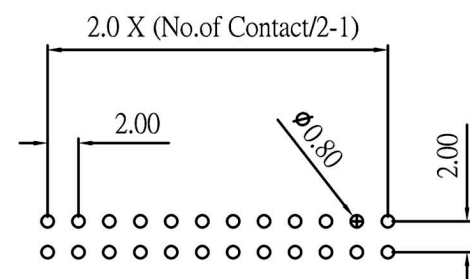

Current Rating and Voltage: 2 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Standard: Brass
 Insulator Material: Nylon-6T or Nylon-9T
 Plastic,UL 94V-0
 Max Processing Temp: 230° C for 60 seconds
 for Nylon-6T
 Max Processing Temp: 260° C for 10 seconds
 for Nylon-9T
 Finish: Standard: Gold Flash all over

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE. 紙張尺寸	2.0MM X 2.0MM SHROUDED HEADER WITH LOCK 2XXXPIN 90° SHORT LATCH GOLD FLASH PLATING BLACK COLOR ROHS
DATE 制表日	PAGE 張數	REV. 版次	PART NO. 料號
2022/03/17	1 OF 1	A	C9003-XXRSGBXXR

08~20 pin : 0.20 mm MAX.
22~50 pin : 0.30 mm MAX.