



P.C.B LAYOUT  
TOP VIEW

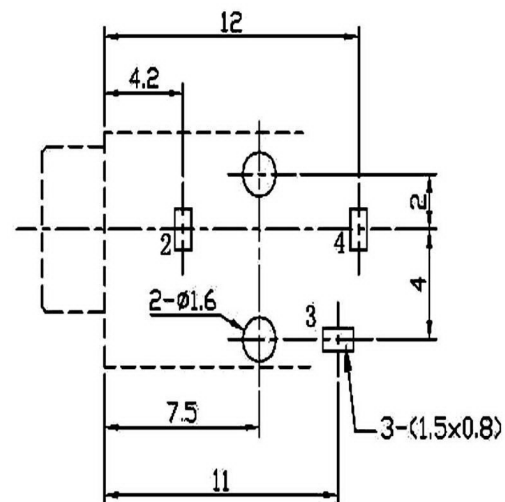

SCHEMATIC



Operating Temp = -20°C ~ +70°C

**SPECIFICATION**

1. Rating: DC 30V 0.5A
2. Contact resistance:  $\leq 0.03\Omega$
3. Insulation resistance:  $\geq 100M\Omega$  (DC250V)
4. Withstand voltage: 500VAC
5. Insertion and extraction force: 3-20N
6. Life test: 5,000 cycles
7. Operating Temp : -20°C ~ +70°C

5	AXIS SUPPORT	1	BRASS	Ni-Plating
4	CURVE PIECE	1	BRASS	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	Betty	SCALE 比例 參考	φ3.5mm Earphone Jack 3Pin Kink Foot
DATE 制表日	2015/08/24	UNIT 單位 M M	Hand Type: Thrid metal W/O Thread
		PAGE 張數 1 OF 1	Tin Plating Black Color ROHS
		REV. 版次 B	PART NO. C9604-03BTB000R
			料號