

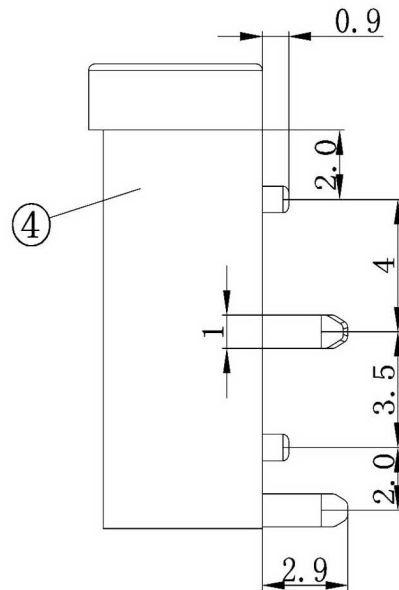


P.C.B LAYOUT  
(TOP VIEW)

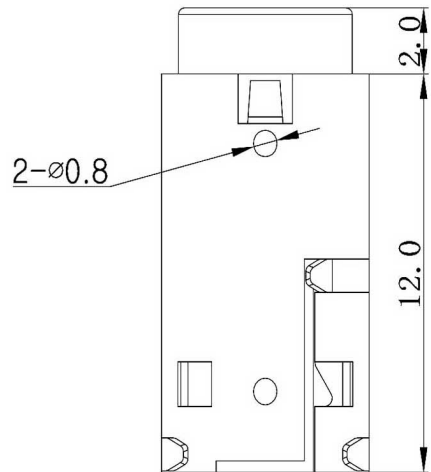

SCHEMATIC

規格 specification

額定電流 Rated current: DC 30V\0.5A

接觸阻抗 Contact resistance:  $\leq 0.03\Omega$

絕緣電阻 Insulation resistance:  $\geq 100M\Omega$

耐電壓 Voltage resistance: AC500V(50Hz)/min

插拔力 Insertion & Withdrawal force: 3-20N

使用溫度範圍 Temperature:  $-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$

使用壽命 Durability (Life Test) :5000 Cycles

4	Housing	1	PPA		
3	Spring Terminal	1	Phosphor bronze	T=0.25	Silver Plating
2	Insert Terminal	1	Phosphor bronze	T=0.25	Silver Plating
1	Bent Foot	1	Phosphor bronze	T=0.25	Silver Plating
NO.	Part Name	Q'ty	Material	Specification	Finish

<p>RoHS Compliant</p>		<p><b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准</p>		<p>TOLERANCE 容許公差</p> <p>.0 ± 0.30</p> <p>.00 ± 0.20</p> <p>ANG. ± 3°</p>	<p>PART NAME 品名</p> <p>φ3.5mm EARPHONE JACK 3P 90° WITH KINK FOOT</p> <p>HEAD TYPE W/ PLASTIC INSULATOR</p> <p>W/O THREAD W/ LOCATING PEG SILVER PLATING</p> <p>ROHS</p>
<p>DWG. 製圖</p> <p>Betty</p>	<p>SCALE 比例</p> <p>參考</p>	<p>UNIT 單位</p> <p>MM</p>	<p>PART NO.</p> <p>C9615-03AYVX00R</p>
<p>DATE 制表日</p> <p>2018/05/03</p>	<p>PAGE 張數</p> <p>1 OF 1</p>	<p>REV. 版次</p> <p>A</p>	<p>料號</p> <p>C9615-03AYVX00R</p>