


1 2 3 4 5 6 7 8

A

A

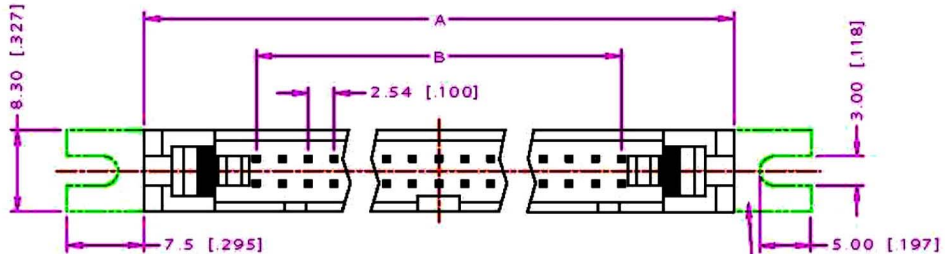

B

B

MATERIALS


- 1. HOUSING : P.B.T. (UL 94V-0), GRAY.
- 2. TERMINAL : COPPER ALLOY.
- 3. CONTACT PLATING : GOLD FLASH

SPECIFICATION

- 1. CURRENT RATING : 3 AMP. MAX.
- 2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- 3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
- 4. CONTACT RESISTANCE : 30m OHMS MAX.
- 5. OPERATING TEMPERATURE : -55°C TO +105°C.

C

C

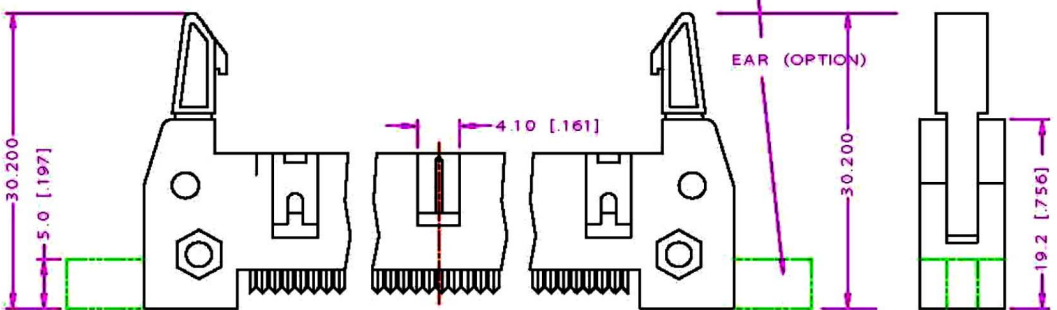


D

D

E

E

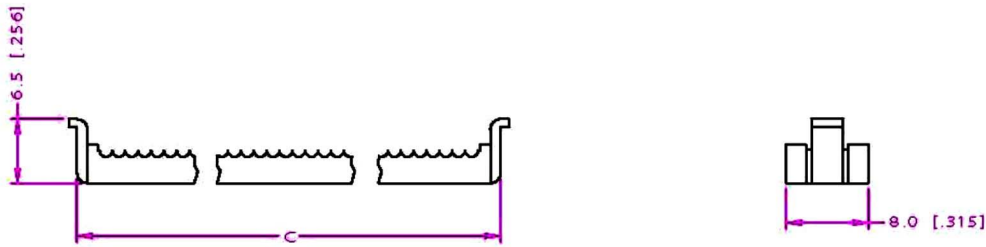

F

F

G

G

TOTAL NO. OF PINS	DIMENSIONS (UNIT : mm/inch)			TOTAL NO. OF PINS	DIMENSIONS (UNIT : mm/inch)		
	A±0.30/.012	B	C±0.30/.012		A±0.30/.012	B	C±0.30/.012
10	32.00/1.260	10.16/.400	17.40/.685	30	57.40/2.260	35.56/1.400	42.80/1.685
14	37.08/1.460	15.24/.600	22.48/.885	34	62.48/2.460	40.64/1.600	47.88/1.885
16	39.62/1.560	17.78/.700	25.02/.985	40	70.10/2.760	48.26/1.900	55.50/2.185
20	44.70/1.760	22.86/.900	30.10/1.185	50	82.80/3.260	60.96/2.400	68.20/2.685
24	49.78/1.960	27.94/1.100	35.18/1.385	60	95.50/3.760	73.66/2.900	80.90/3.185
26	52.32/2.060	30.48/1.200	37.72/1.485	64	100.58/3.960	78.74/3.100	85.98/3.385

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 Hedy
DWG. 製圖 Yumi
DATE 制表日 2010/01/15

SCALE 比例 參考
UNIT 單位 MM
PAGE 張數 1 OF 1

TOLERANCE 容許公差
X ±0.30/±.012
.XX ±0.20/±.008
SIZE 紙張尺寸 A 4
REV. 版次 A

PART NAME 品名
SHROUDED HEADER IDC TYPE 2.54mm X 2.54mm
XXP W/O S/R LONG LOCK W/EAR LOW LEAD
SELECTIVE GOLD PLATING GREY COLOR

PART NO. C9800-XXALSG00R
料號

1 2 3 4 5 6 7 8

H

H