


PANEL MOUNTING

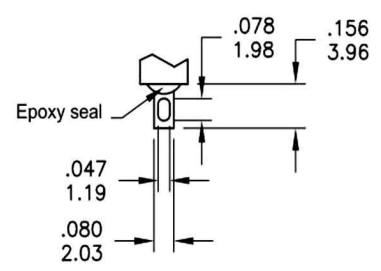

SOLDER LUG

	POS.1	POS.2	POS.3
Model No.			
	ON	NONE	ON
Term. Comm.	2-3,5-6		2-1,5-4
SCHEMATIC		OPEN	

SWITCH FUNCTION

**SPECIFICATIONS**

**MECHANICAL LIFE:** 40,000 make-and-break cycles.  
**CONTACT RESISTANCE:** 10mΩ max. initial @ 2-4VDC  
 100mA for both silver and gold plated contacts.  
**INSULATION RESISTANCE:** 1,000MΩ min.  
**DIELECTRIC STRENGTH:** 1,000 V RMS@sea level.  
**OPERATING TEMPERATURE:** -30°C to 85°C.

**RATING :** 2Amps @250VAC  
 5Amps @120 VAC or 28 VDC

**MATERIALS**

**CASE:** Diallyl phthalate (DAP) (UL94v-0).  
**ACTUATOR:** Brass,chrome plated.  
**BUSHING:** Brass,nickel plated.  
**HOUSING:** Stainless Steel.  
**TERMINAL/CONTACT:**Silver or gold plated.

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE (公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR: ±5°	PART NAME 品名 Miniature Toggle Switches Switch Function:DPDT On-None-On Actuator Heigh:10.41mm Bushing:8.89mm High,Keyway Termination:Solder Lug Silver Plating Seal:With EPOXY ROHS
DWG. 製圖	Betty	SCALE 比例 參考	PART NO. 料號 C9901-D1AB1T1VY0R
DATE 制表日	2019/08/06	UNIT 單位 M M	
		PAGE 張數 1 OF 1	
		REV. 版次 A	