
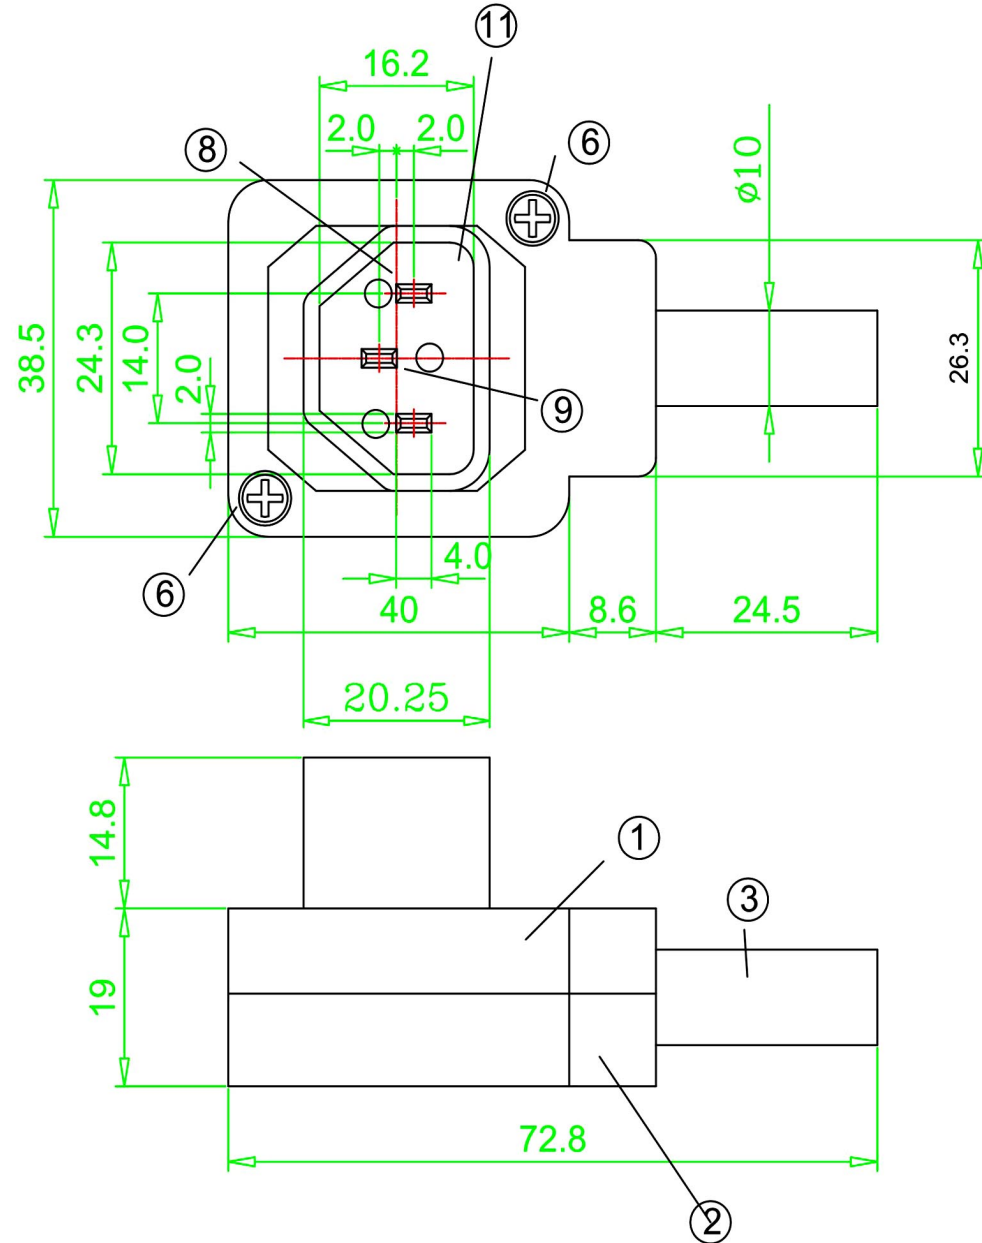


規格
SPECIFICATIONS

- 額定
1. Rating: 10A 250VAC
絕緣電阻
2. Insulation Resistance: DC 500V 100MΩ Min.
耐電壓
3. Dielectric Strength: AC 2000V 1Minute
材料規格
4. Housing Material: Nylon#66 94V-2
認可安規
5. Safety approval: 



11	Terminal block	1	Nylon #66	
10	Screw terminal	3	BSP1-1/2H	0.8
9	Intermediate terminal	1	BSP1-1/2H	2.0
8	Side terminal	2	BSP1-1/2H	2.0
7	Screws	3	Iron / Nickel Plating	3.5#*5
6	Screws 3 * 12	2	Iron / Nickel Plating	3*12
5	Screws 3 * 9.5	2	Iron / Nickel Plating	3*9.5
4	Gasket	1	Nylon #66	
3	PVC casing	1	PVC	
2	Base	1	Nylon #66	
1	Cover	1	Nylon #66	
NO	Part Name	Q'ty	Material	Specification

<p>RoHS Compliant</p>	<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
	<p>APPD. 核准</p>	<p>TOLERANCE 容許公差</p>
<p>DWG. 製圖</p>	<p>SCALE 比例</p>	<p>PART NAME 品名 HS-2233-A(UL) AC POWER PLUG ASSEMBLY TYPE MATERIAL: NYLON66 94V-2 BLACK INSULATOR ROHS</p>
<p>DATE 制表日</p>	<p>UNIT 單位</p>	<p>SIZE. 紙張尺寸</p>
<p>2017/04/05</p>	<p>PAGE 張數</p>	<p>REV. 版次</p>
<p>Betty</p>	<p>M M</p>	<p>A 4</p>
<p>1 OF 1</p>	<p>B</p>	<p>PART NO. 料號 C9996-GAB00000R</p>