
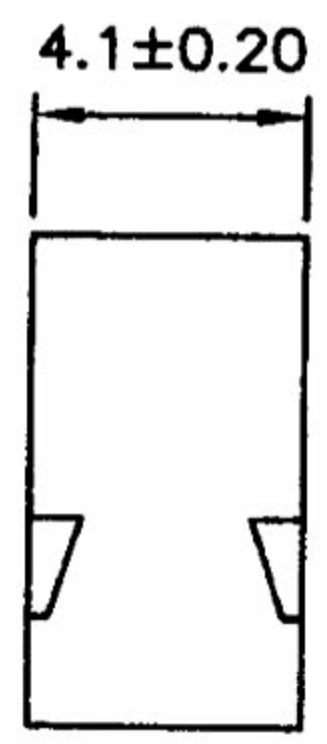
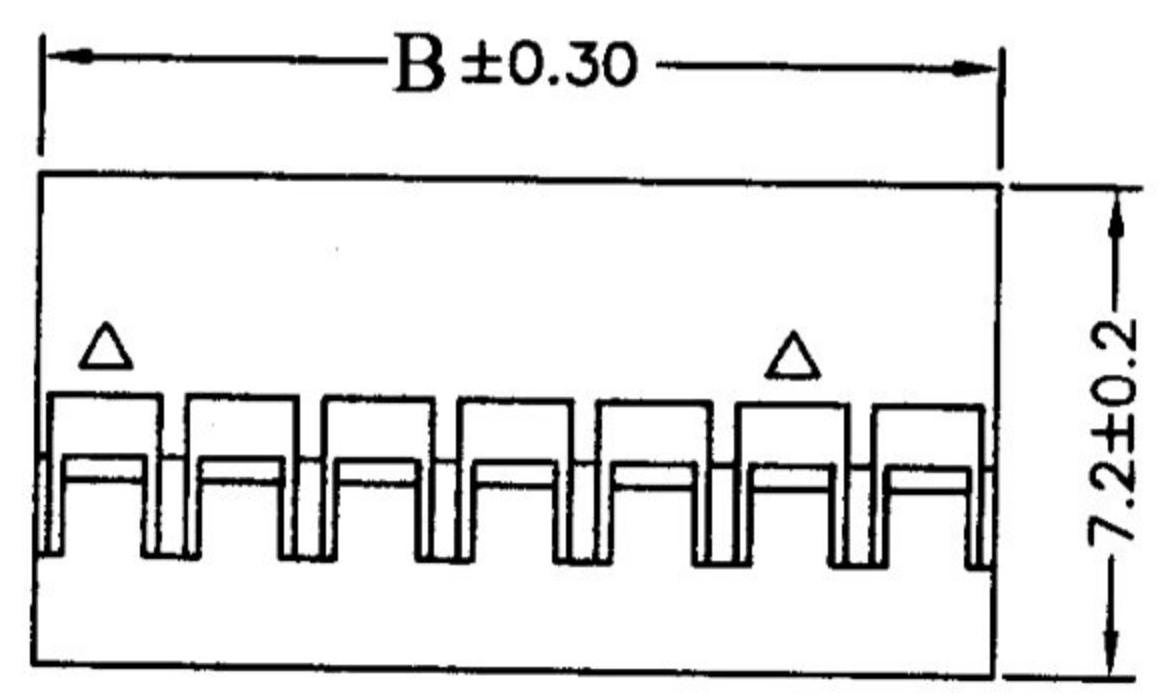


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

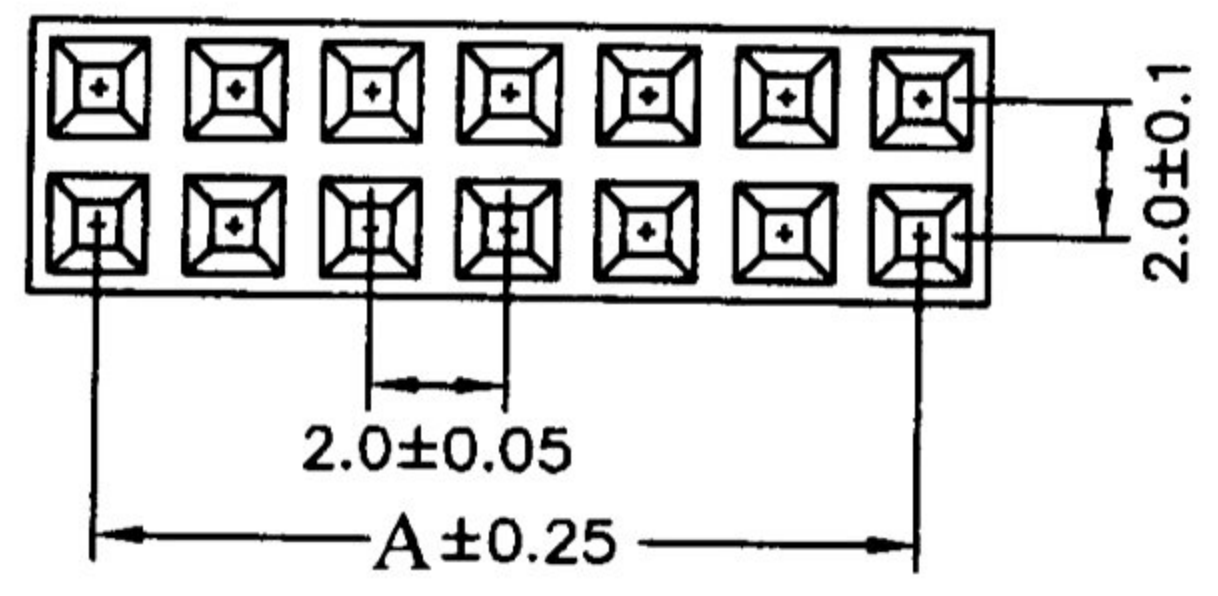

CKTS	DIM. "A"	DIM. "B"
4	2.00	4.2
6	4.00	6.2
8	6.00	8.2
10	8.00	10.2
12	10.00	12.2
14	12.00	14.2
16	14.00	16.2
18	16.00	18.2
20	18.00	20.2
22	20.00	22.2
24	22.00	24.2
26	24.00	26.2
28	26.00	28.2
30	28.00	30.0
32	30.00	32.2
34	32.00	34.2
36	34.00	36.2
38	36.00	38.2
40	38.00	40.2
42	40.00	42.2
44	42.00	44.2
46	44.00	46.2
48	46.00	48.2
50	48.00	50.2
60	58.00	60.2
80	78.00	80.2

NOTES :

- * Poles: 04~80
- * Material: NYLON 66UL94V-0 BLACK

Specifications

- * Current rating: 1A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 0.0 ±0.30 0.00 ±0.20 0.000 ±0.08	PART NAME 品名 2.0mm HOUSING DUAL ROW 2XXXP WITHOUT BUMP BLACK INSULATOR NYLON66 UL94-V0 ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 H1002-XXPDB004R
DATE 制表日 2023/08/07	PAGE 張數 1 OF 1	REV. 版本 B	

1 2 3 4 5 6 7 8