
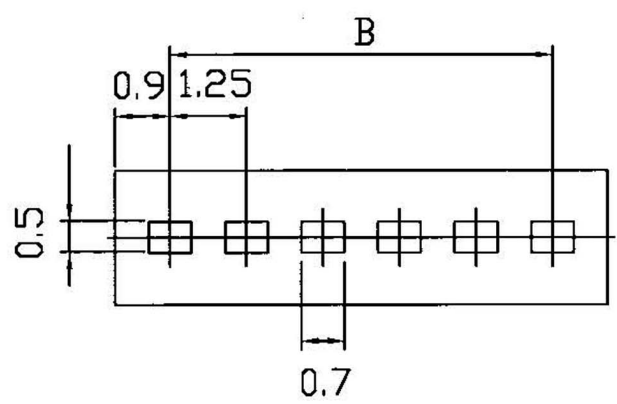

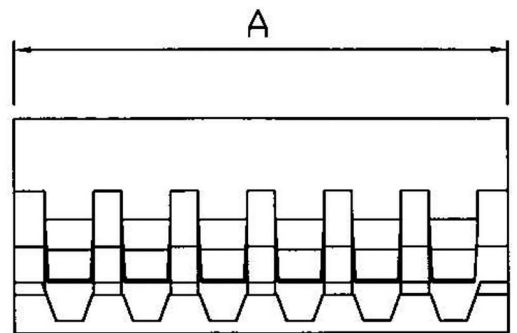


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

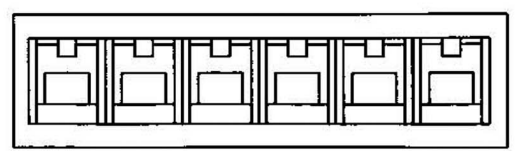

Electrical

Current Rating: 1A AC, DC
 Voltage Rating: 125V AC/ max.
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 1000MΩ/ min.
 Dielectric Withstanding Voltage: 250V AC/ min.
 Contact Resistance: 20mΩ/ max.

Material

Material: Nylon66, UL94V-0

Poles	Dimension	
	A	B
2	3.05	1.25
3	4.30	2.50
4	5.55	3.75
5	6.80	5.00
6	8.05	6.25
7	9.30	7.50
8	10.55	8.75
9	11.80	10.00
10	13.05	11.25
11	14.30	12.50
12	15.55	13.75
13	16.80	15.00
14	18.05	16.25
15	19.30	17.50

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel	 TOLERANCE 容許公差	PART NAME 品名 1.25mm BOARD IN HOUSING XXP WHITE COLOR ROHS LOW-LEAD	
DWG. 製圖 Yumi	SCALE 比例 參考	SIZE. 紙張尺寸 A 4	PART NO. 料號 H1026-XXPW0000R
DATE 制表日 2008/08/20	UNIT 單位 M M	REV. 版次 A	
PAGE 張數 1 OF 1			

1 2 3 4 5 6 7 8