
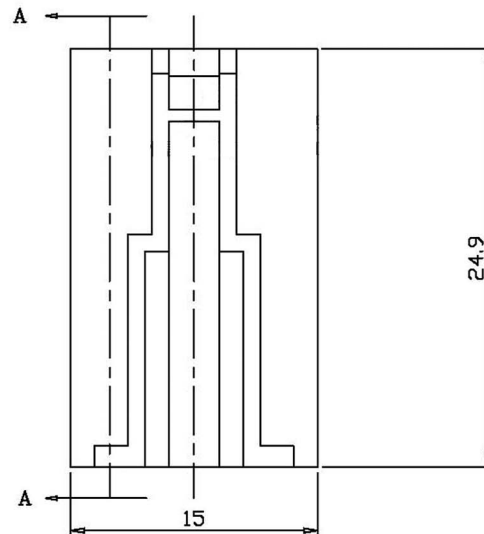


Specifications:

- Poles: 6 Poles
- Pitch Between Poles: 4.5mm
- Current Rating: 5A
- Voltage Rating: 250V AC, DC
- Temperature Range:  $-25^{\circ}$  ~  $+85^{\circ}$  C
- Contact Resistance: Initial value/10m $\Omega$  max  
After environmental testing/20m $\Omega$
- Withstand Voltage: 1500V AC/minute
- Insulation Resistance: 1000 M $\Omega$ /min
- Material: Nylon UL94V-0

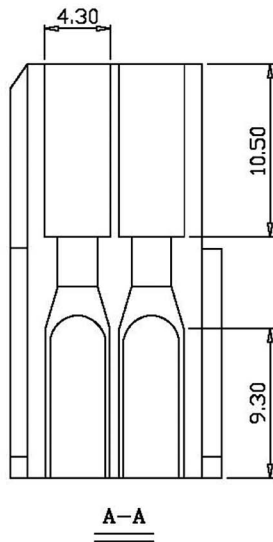

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b>	
		<b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准	 SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖		.000 :±0.08 .00 :±0.13 .0 :±0.25	φ1.30mm FEMALE HOUSING 2X3P WHITE COLOR WITHOUT EAR ROHS LOW-LEAD
DATE 制表日	UNIT 單位	SIZE. 紙張尺寸	PART NO.
2009/10/05	M M	A 4	料號 H1030-06PDNW00R
	PAGE 張數	REV. 版次	
	1 / 1	A	