

**Features:**


- Integrally molded polarization
- Integrally molded mountings ears available
- 94V-2 rated nylon
- Accepts .062"(1.58mm) diameter crimp type terminals
- Friction lock
- Standard color: Nature

**Specifications:**

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000M $\Omega$  min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40 °C ~ 125 °C



H1158-02PSNW00R  
( W/O Ear )

H1158-02PSRW00R

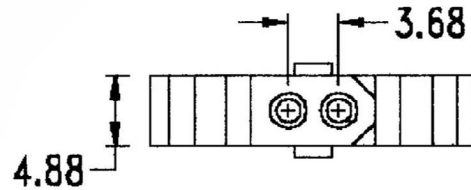


H1058-02PSNW00R  
( W/O Ear )


H1058-02PSRW00R

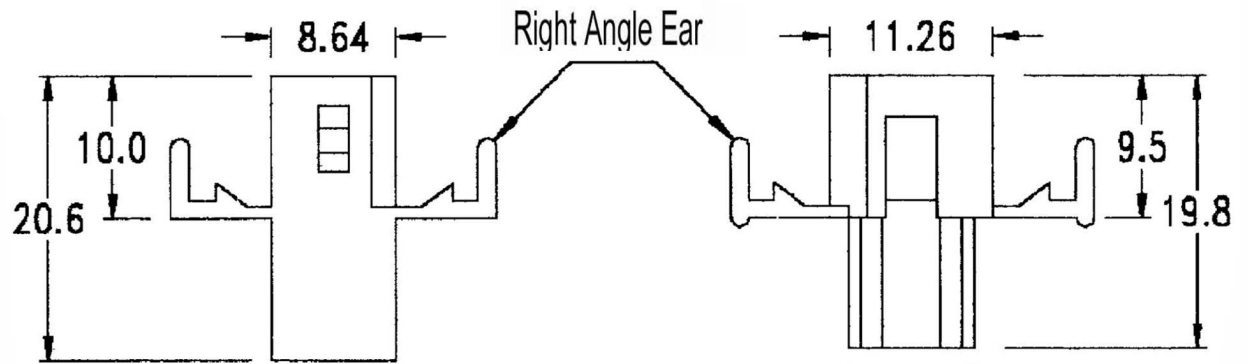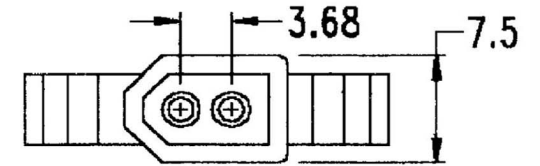

Male Housing



Female Housing



RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY	UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.05 ( mm ) .00 ± 0.15 ( mm ) .0 ± 0.25 ( mm )	PART NAME 品名
DWG. 製圖	BETTY		MX $\psi$ 1.58mm Male & Female Housing 1X2P
DATE 制表日	2009/09/28	SCALE 比例 參考	PART NO. 料號
		UNIT 單位 M M	H1058&H1158 ROHS SERIES-2P
		PAGE 張數 1 OF 1	
		SIZE. 紙張尺寸 A 4	
		REV. 版次 A	