

Features:

- Integrally molded polarization
- Integrally molded mountings ears available
- 94V-2 rated nylon
- Friction lock
- Standard color: Nature


Specifications:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000MΩ min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 125°C

H1158-05PSNW00R

(W/O Ear)



H1158-05PSRW00R

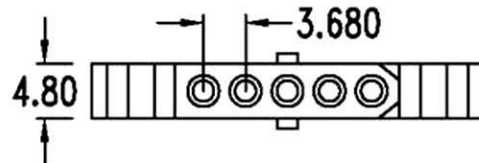

H1058-05PSNW00R

(W/O Ear)

H1058-05PSRW00R

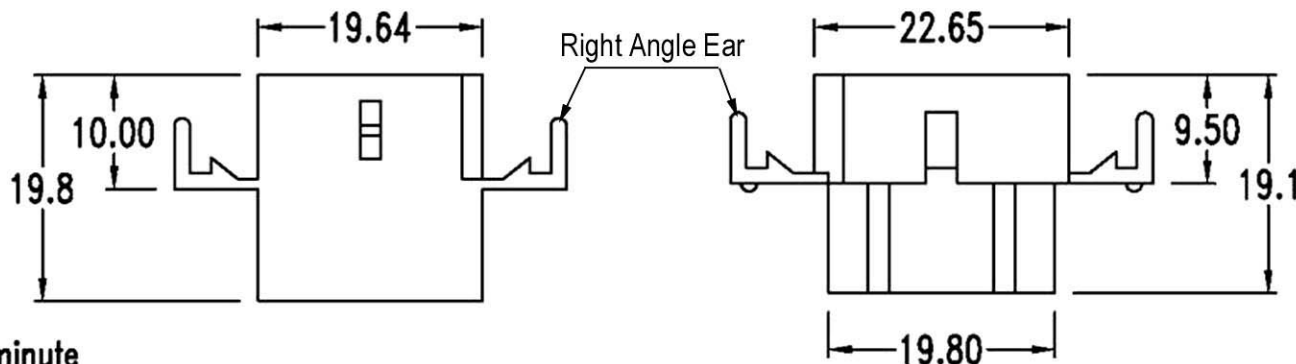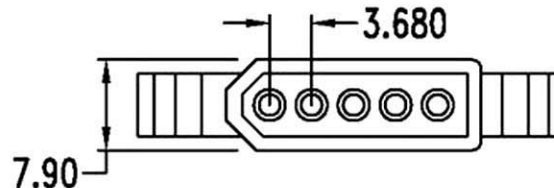

Male Housing



Female Housing

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准
DWG. 製圖
DATE 制表日
2006/07/03

SCALE 比例 參考
UNIT 單位 M M
PAGE 張數 1 OF 1

TOLERANCE 容許公差
.000 ±0.08 (mm)
.00 ±0.25 (mm)
.0 ±0.4 (mm)

PART NAME 品名
MX ø1.58mm Male Housing & Female Housing

PART NO.
料號 H1058 & H1158 RoHS Series-4

Jolin