

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C

D


E

F


G

H

6.8±0.20

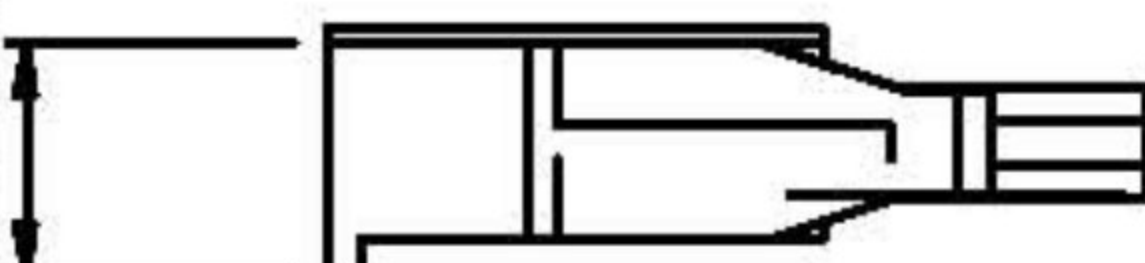


14.0±0.20

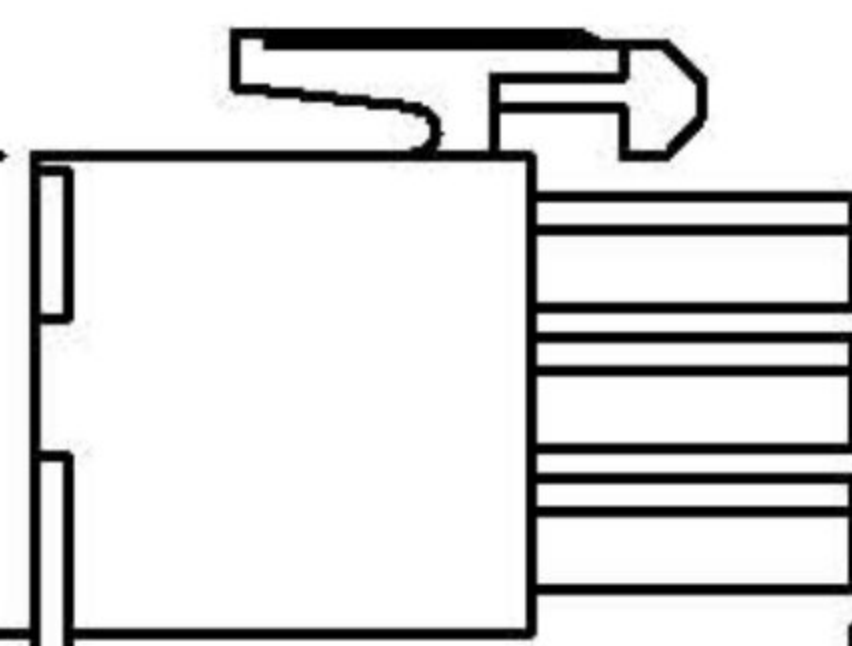


4.6±0.20


24.1±0.20

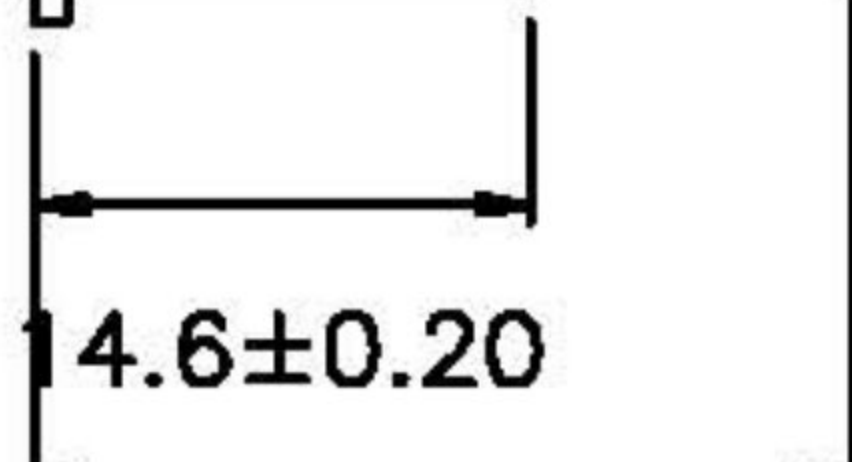

5.8±0.20

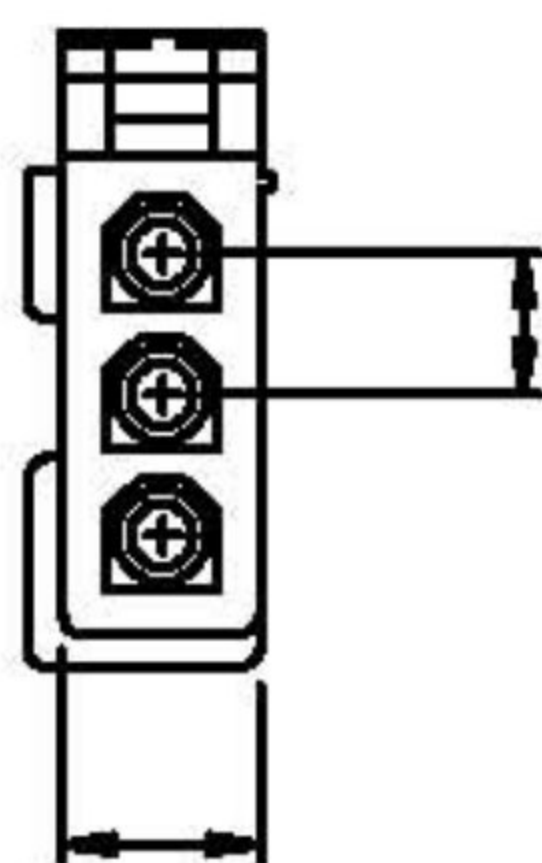

4.14

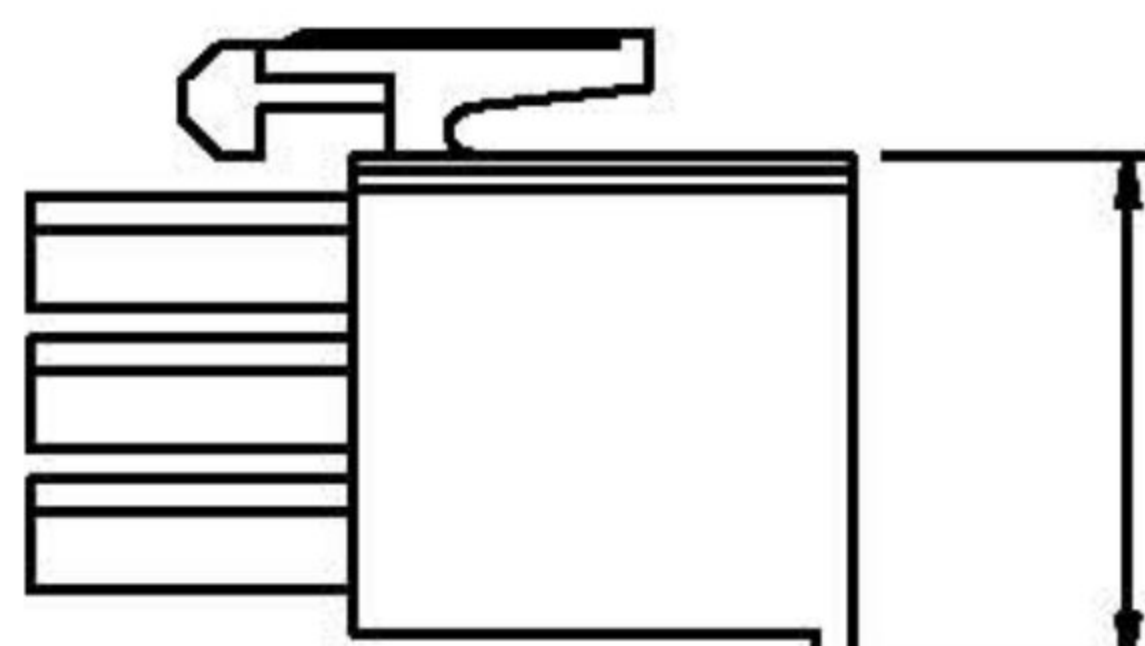

15.0±0.20

Specifications:

Material: Polyester, UL 94V-2

Voltage Rating: 300V

Current Rating: 5A

Withstand Voltage: 1500V AC/Minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25°C~+85°C

Contact Resistance: Initial value/10m max.

After environmental testing/20mΩ max.

Applicable Wire:AWG#18 TO #24

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准 HELEN

DWG.
製圖 ABBY

DATE 制表日
2012/09/03



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差

.0 ±
.00 ±
ANG. ±

SIZE.
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名

φ 1.0mm MALE HOUSING 1X3P
UL94V-2 MATERIAL WHITE COLOR ROHS

PART NO.

料號 H1110-03PSAW00R