




14.4±0.15

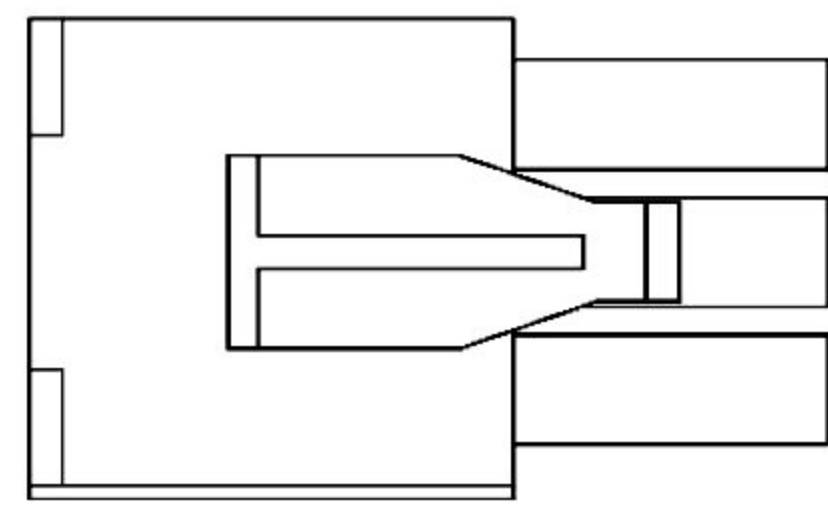

10.1±0.15

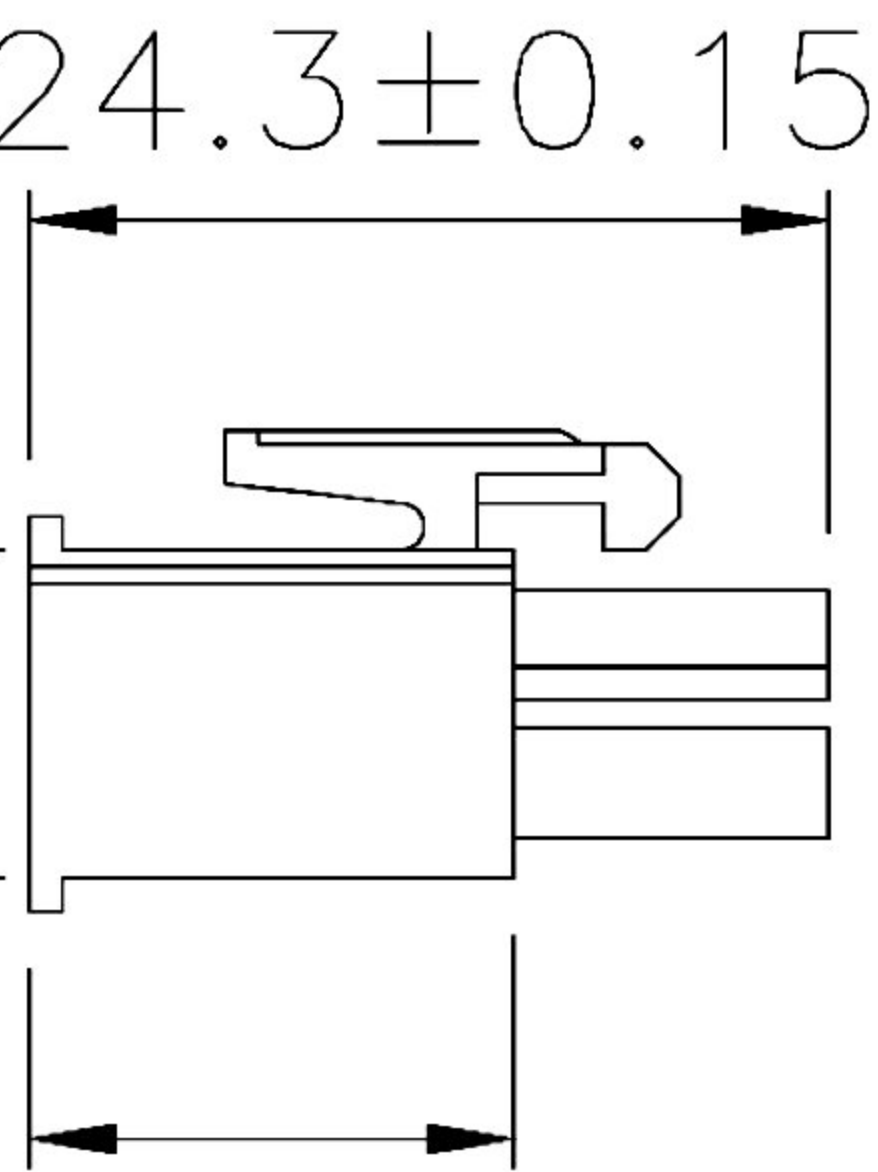


14.75±0.15

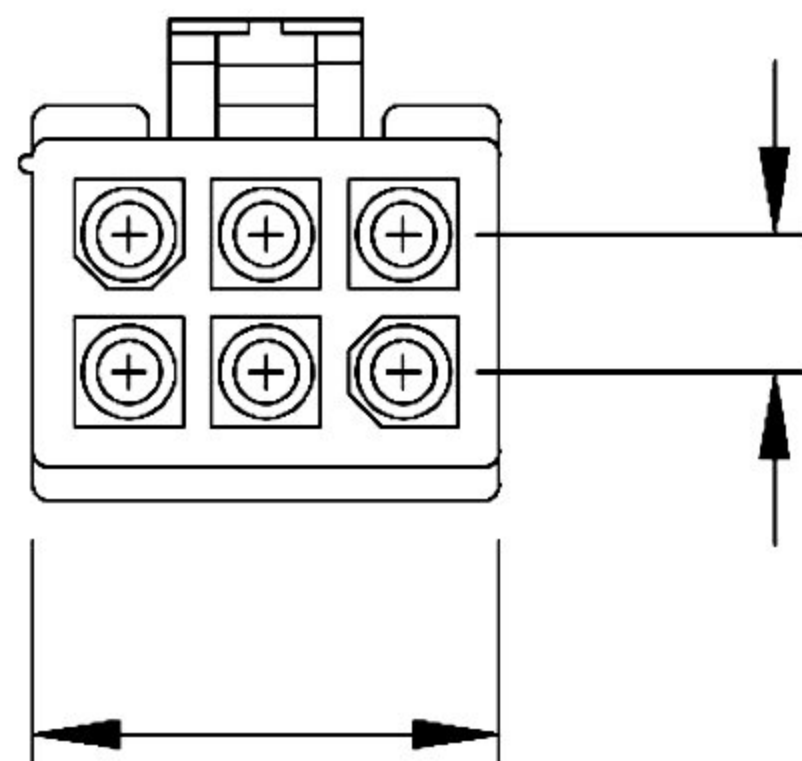

14.4±0.15

4.14

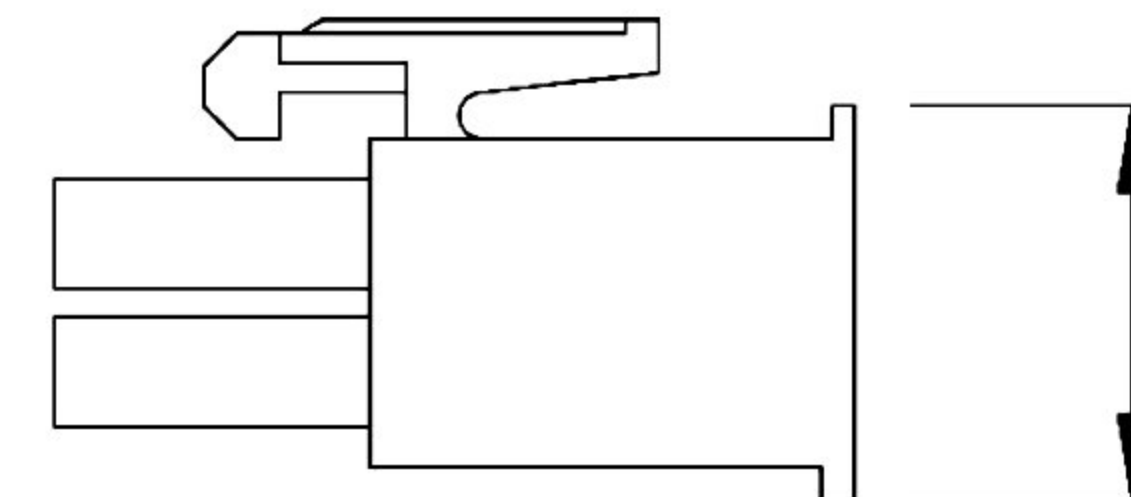

11.9±0.20

### Specifications:

- Material: Polyester, UL 94V-2
- Voltage Rating: 300V
- Current Rating: 5A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10m max.  
After environmental testing/20m max.
- Applicable Wire:AWG#18 TO #24

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .000 :±0.08 .00 :±0.13 .0 :±0.25	PART NAME 品名 φ 1.0mm MALE HOUSING 2X3P UL94V-2 MATERIAL WHITE COLOR ROHS
DWG. 製圖 ABBY		UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 制表日 2018/02/12	PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 H1110-06PDAW00R