


1 2 3 4 5 6 7 8


A

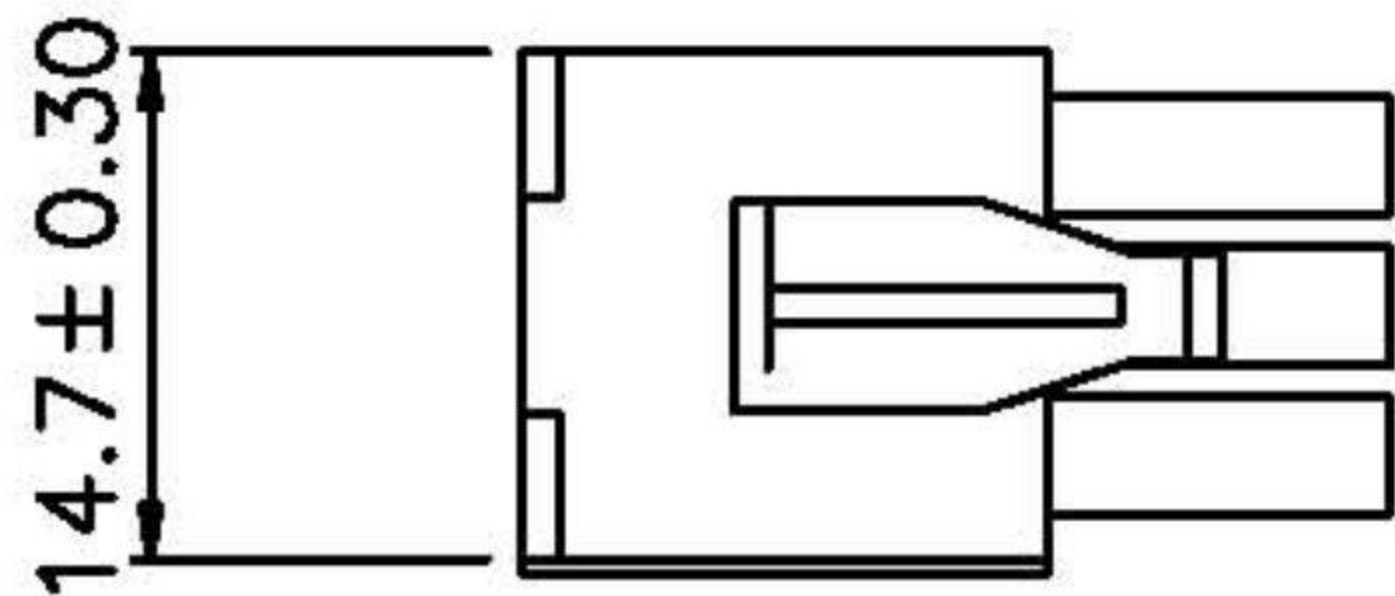

B

C

D

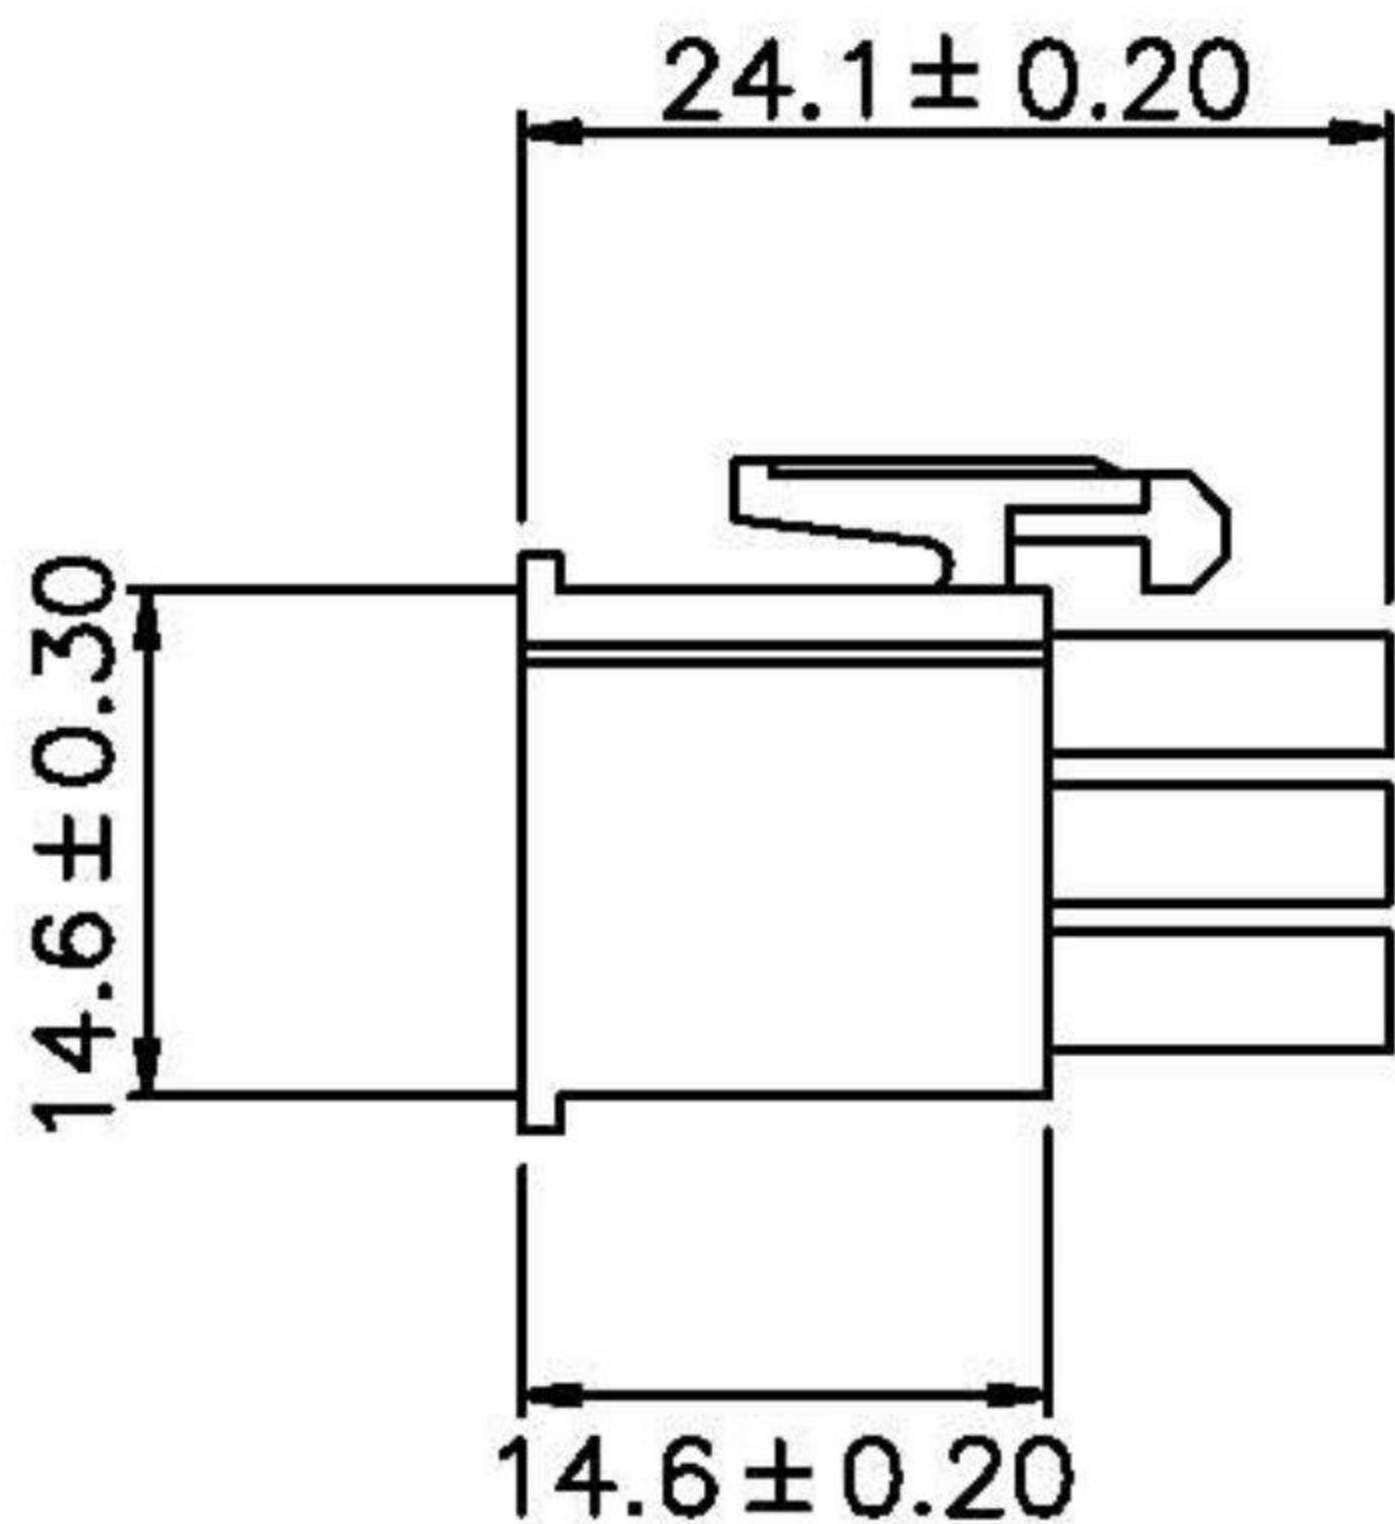

E

F

G

H

Specifications:

Material: Polyester, UL 94V-2

Voltage Rating: 300V

Current Rating: 5A

Withstand Voltage: 1500V AC/Minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25°C~+85°C

Contact Resistance: Initial value/10m max.

After environmental testing/20mΩ max.

Applicable Wire:AWG#18 TO #24

A

B

C



D

E

F

G

H

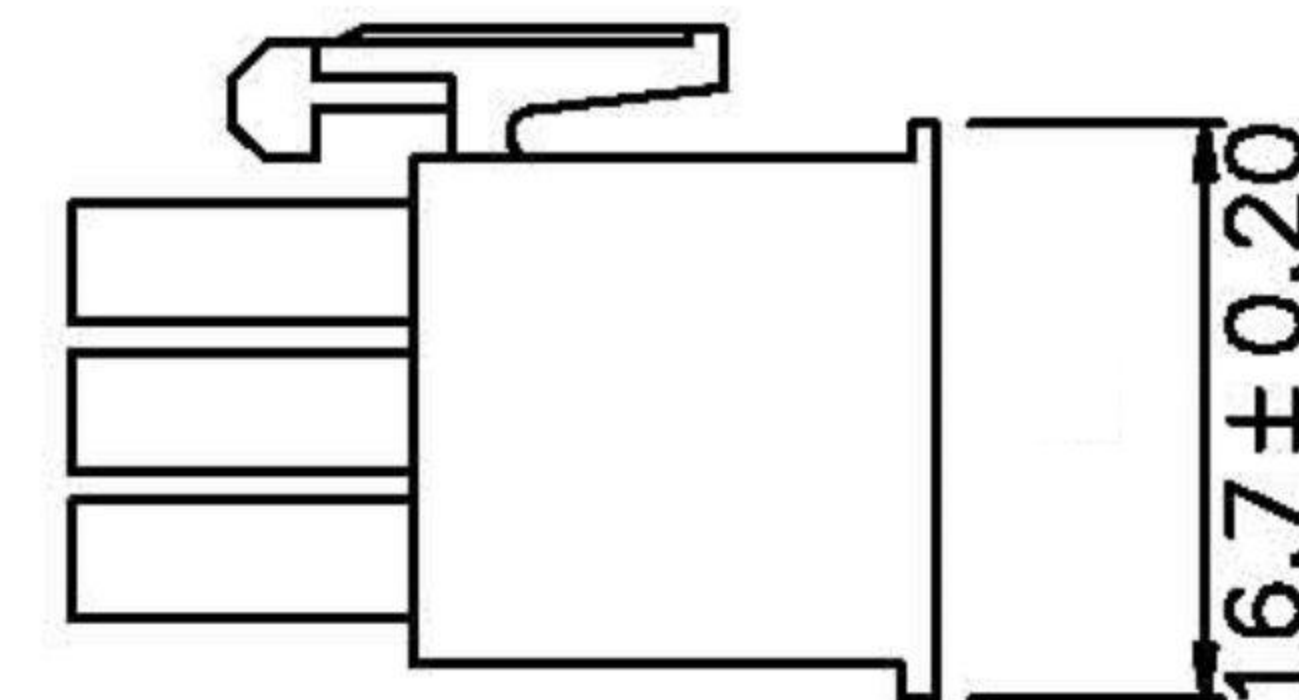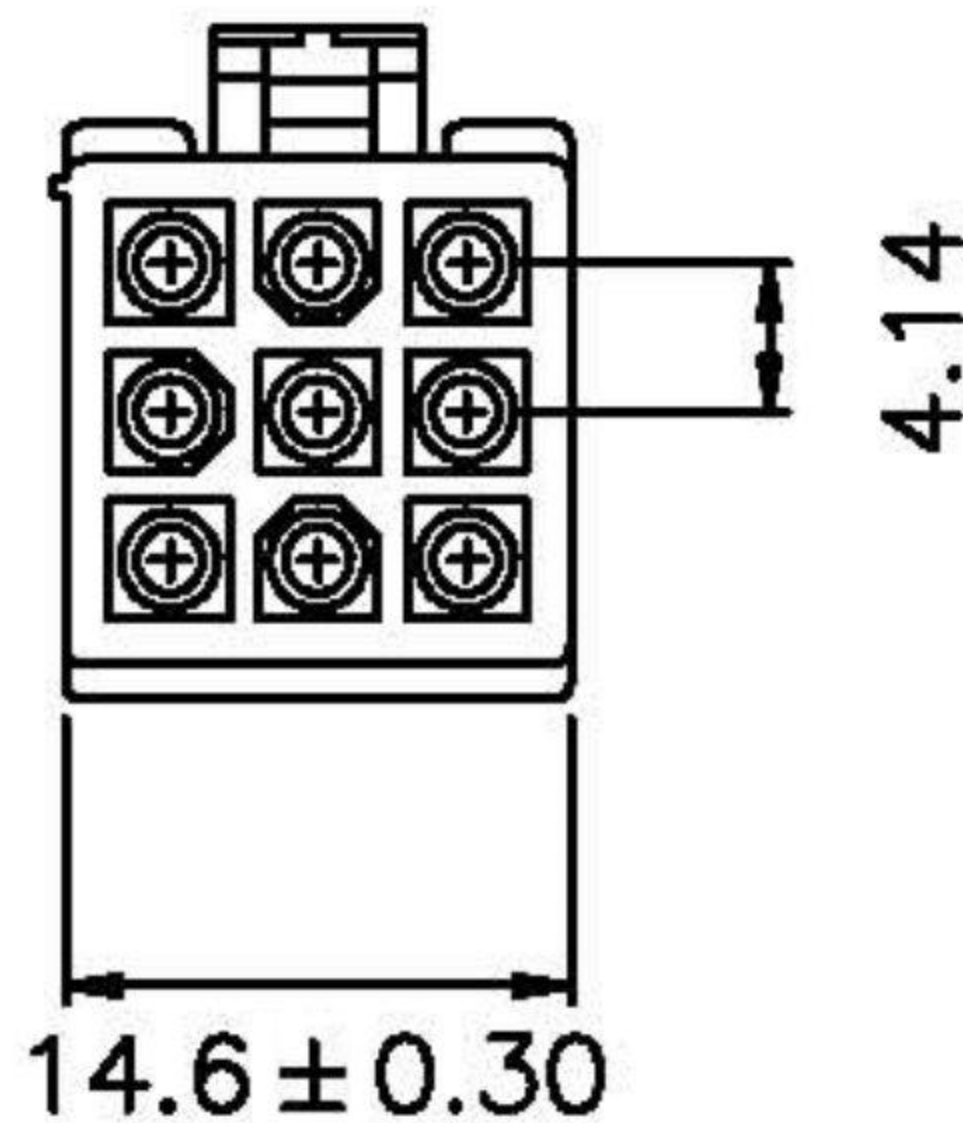

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN
DWG. 製圖 ABBY
DATE 制表日 2012/09/03

TOLERANCE 容許公差
SCALE 比例 參考
UNIT 單位 MM
PAGE 張數 1 OF 1

PART NAME 品名
φ 1.0mm MALE HOUSING 3X3P
UL94V-2 MATERIAL WHITE COLOR ROHS
PART NO. 料號 H1110-09PTAW00R

1 2 3 4 5 6 7 8