


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H




A
B
C
D
E
F
G
H

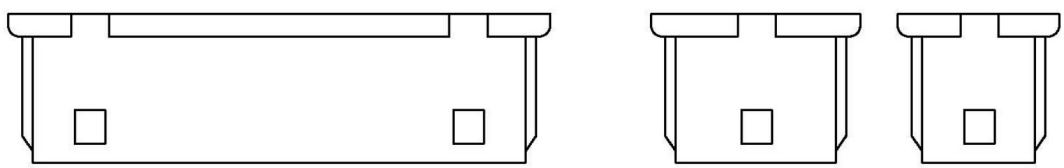

3 Circuit 2 Circuit

- **SPECIFICATIONS**
- Voltage Rating : 125V AC/DC
 - Current Rating : 1A AC/DC
 - Withstanding Voltage : 250V AC/minute
 - Insulation Resistance : 100M Ω min
 - Temperature Range : - 40°C to + 85°C
 - Contact Resistance : 20mΩ max

- **RECEPTACLE HOUSING**
- Poles : 2 - 15
 - Material : Nylon 66 UL94V-0
 - Q' ty : 1,000 Pcs./Bag

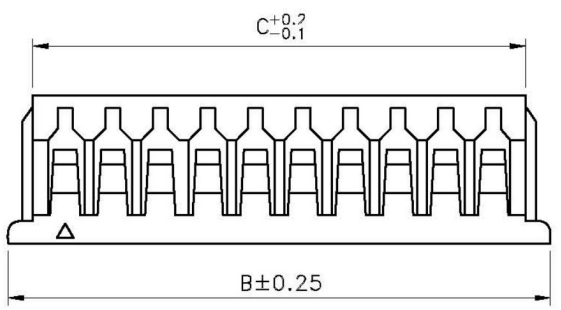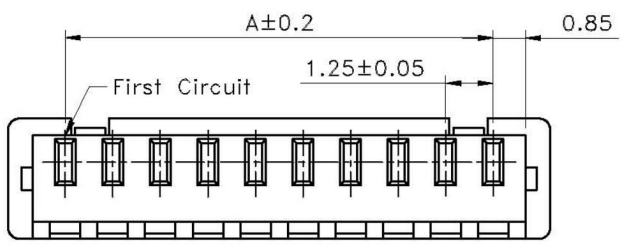

Poles	Dimensions (mm)		
	A	B	C
2	1.25	4.25	2.95
3	2.50	5.50	4.20
4	3.75	6.75	5.45
5	5.00	8.00	6.70
6	6.25	9.25	7.95
7	7.50	10.50	9.20
8	8.75	11.75	10.45
9	10.00	13.00	11.70
10	11.25	14.25	12.95
11	12.50	15.50	14.20
12	13.75	16.75	15.45
13	15.00	18.00	16.70
14	16.25	19.25	17.95
15	17.50	20.50	19.20

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Hedy	SCALE 比例 參考	TOLERANCE .0 ±0.3 .00 ±0.2 .000 ±0.1	
DWG. 製圖 Yumi		PART NAME 品名 1.25mm HOUSING 1XXXP WHITE COLOR ROHS LOW-LEAD	
DATE 制表日 2010/03/03	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 H1259-XXPW0000R
	PAGE 張數 1 OF 1	REV. 次 A	

1 2 3 4 5 6 7 8