
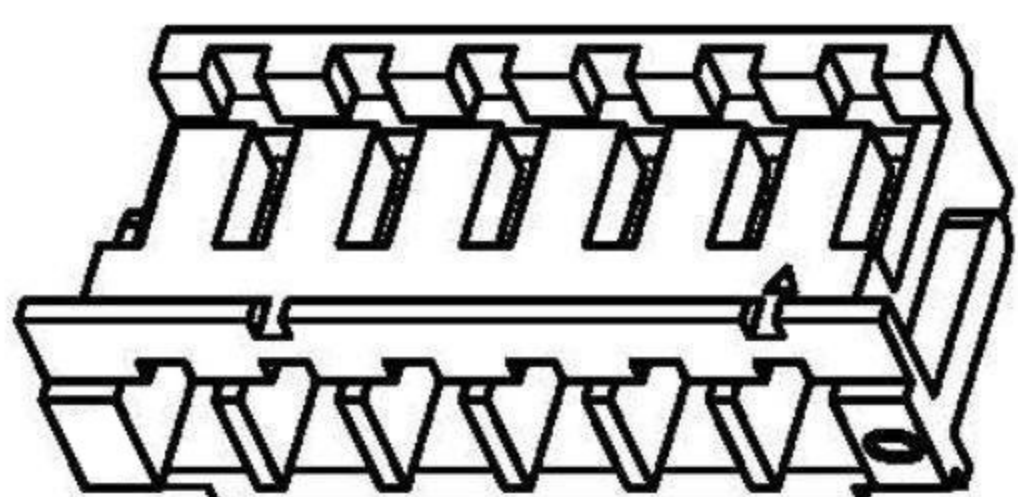


1 2 3 4 5 6 7 8

A

A


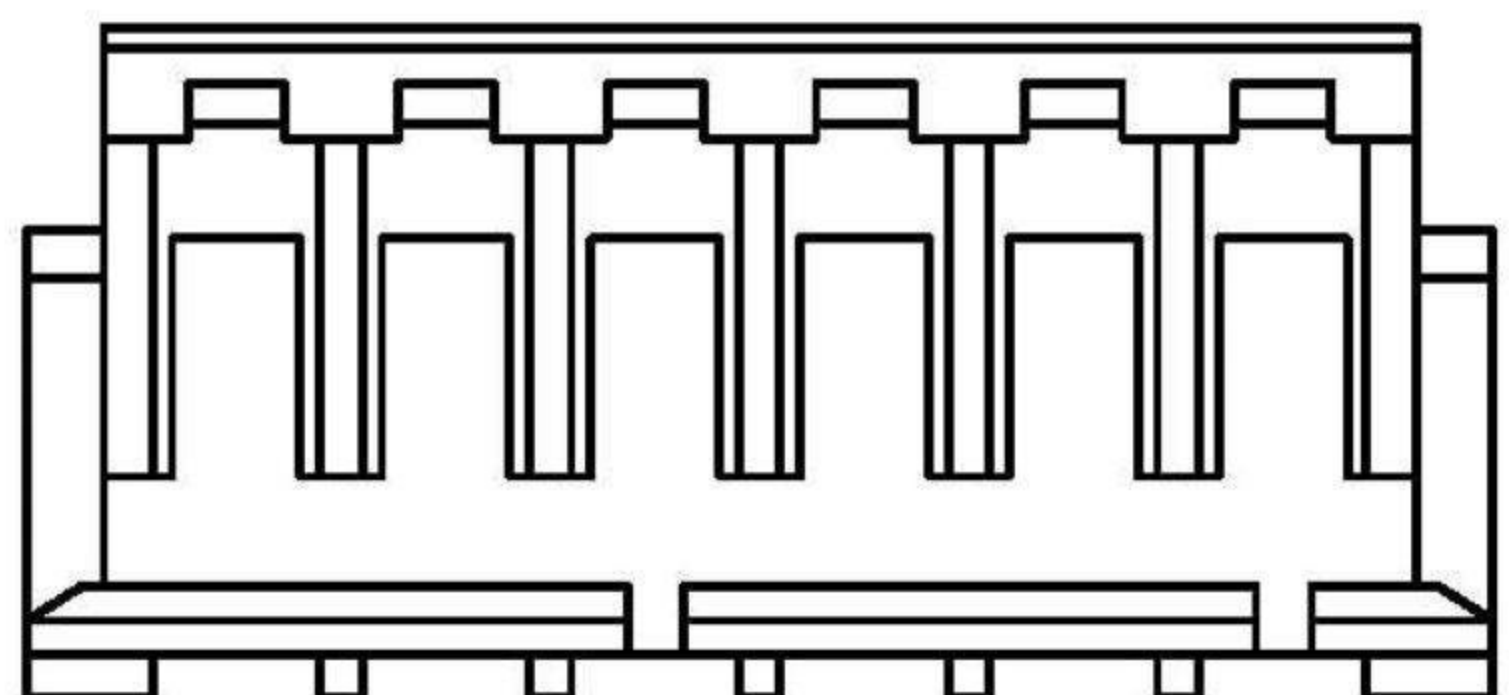


SPECIFICATIONS

- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500MΩ min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max

B

B

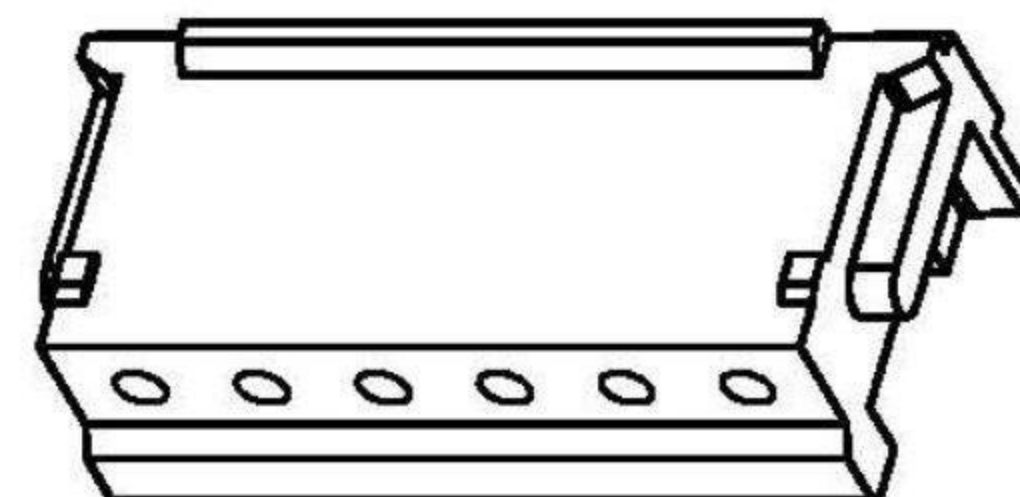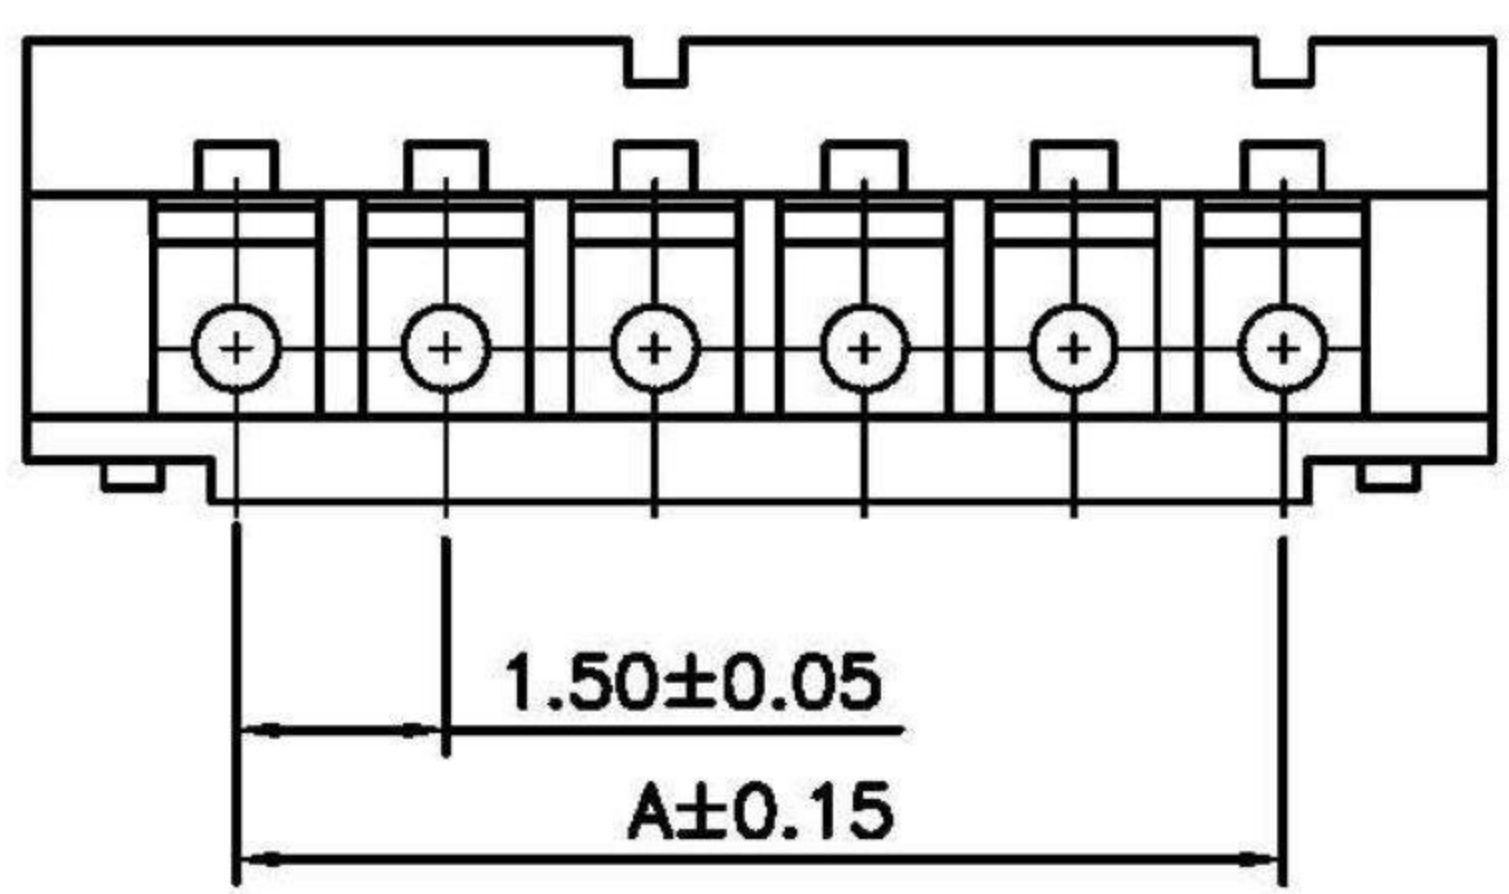

HOUSING

- Poles : 2~15
- Material : Nylon 66 UL94V-0
- Q' ty : 1000pcs./Bag

C

C

D



D

△ 3D VIEW

Poles	Dimension(mm)		
	A	B	C
2	1.50	4.50	3.40
3	3.00	6.00	4.90
4	4.50	7.50	6.40
5	6.00	9.00	7.90
6	7.50	10.50	9.40
7	9.00	12.00	10.90
8	10.50	13.50	12.40
9	12.00	15.00	13.90
10	13.50	16.50	15.40
11	15.00	18.00	16.90
12	16.50	19.50	18.40
13	18.00	21.00	19.90
14	19.50	22.50	21.40
15	21.00	24.00	22.90

E

E

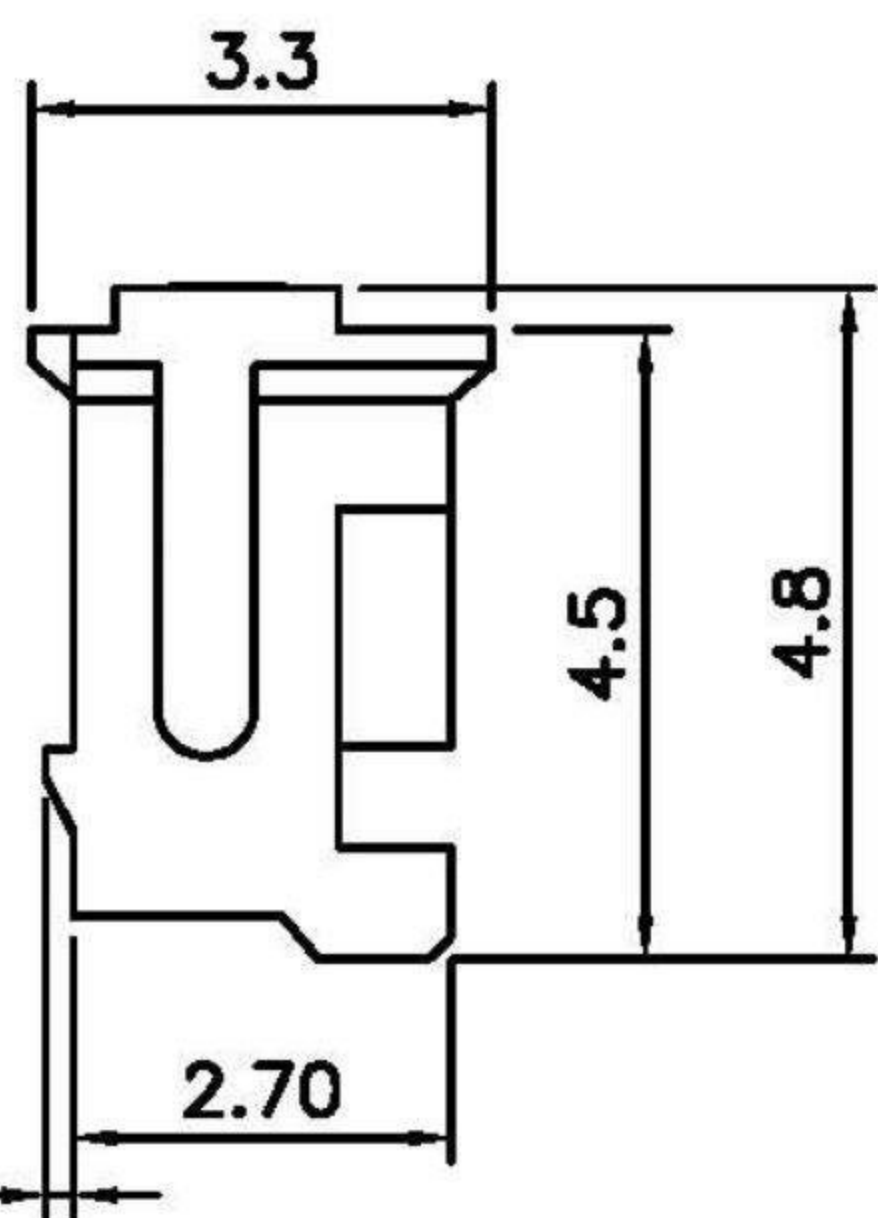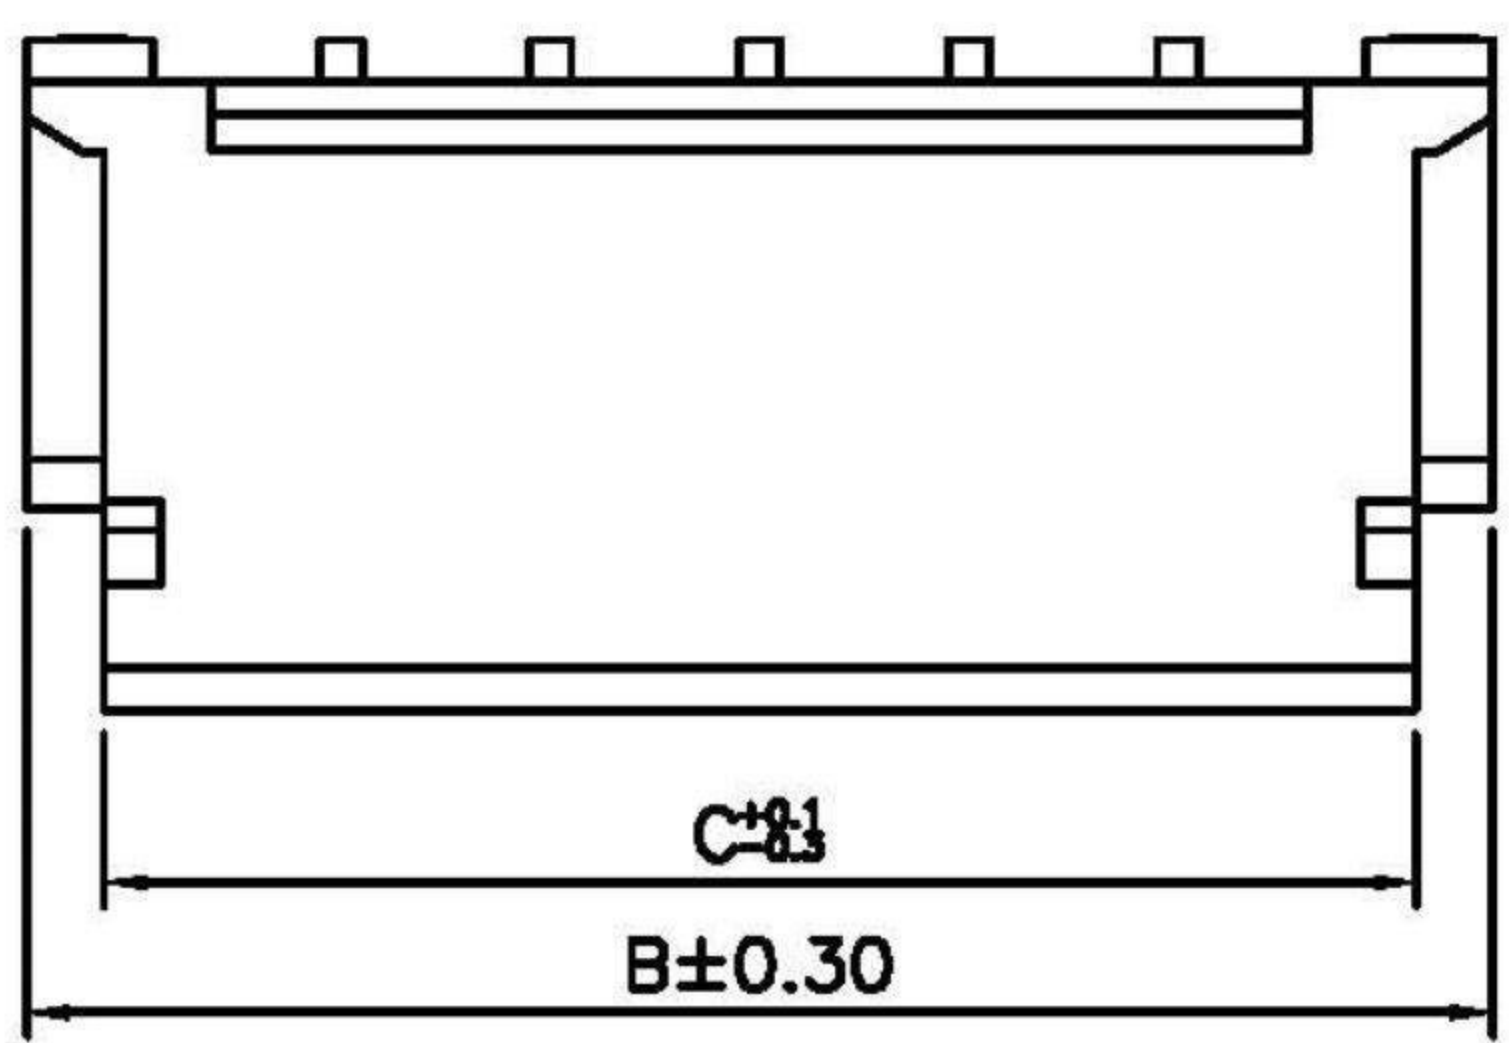

△ 0.20±0.1

F

F

G

G

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN
DWG. 製圖 ABBY
DATE 制表日 2011/11/21

SCALE 比例 參考
UNIT 單位 MM
PAGE 張數 1 OF 1

TOLERANCE
.0 ±0.30
.00 ±0.20
.000 ±0.10
ANGLE ±1°
SIZE. 紙張尺寸 A4
REV. 版次 A
PART NAME 品名
1.50mm HOUSING 1XXXP
WHITE COLOR NYLON 66 UL94V-0 ROHS
PART NO. 料號 H1500-XXPW0000R

H

H

1 2 3 4 5 6 7 8