

1 2 3 4 5 6 7 8

A

B

C



D

E

F

G

H

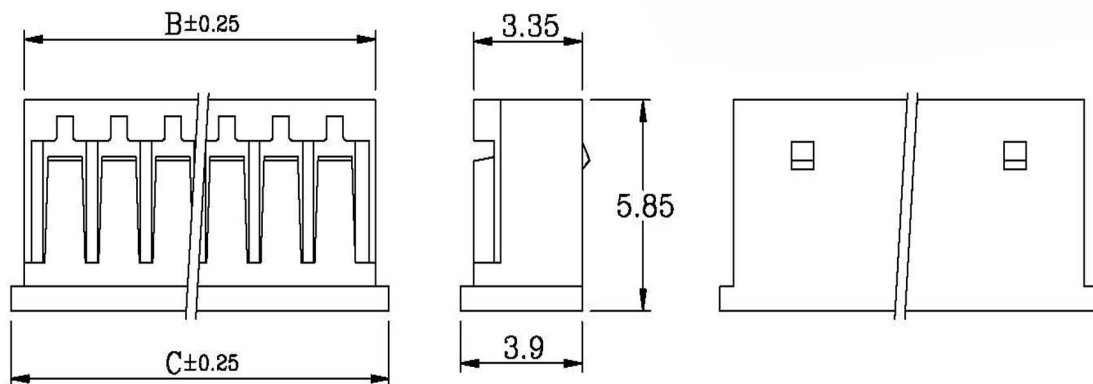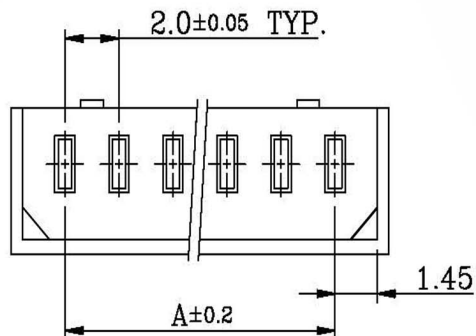

Specifications:

- Material: Nylon 66 UL 94V-0
- Voltage Rating: 125V
- Current Rating: 1.5A
- Withstand Voltage: 800V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10mΩ max.  
After environmental testing/20mΩ max.

Dimensional

Circuits	Dimensions mm		
	A	B	C
2	2.00	4.90	6.00
3	4.00	6.90	8.00
4	6.00	8.90	10.00
5	8.00	10.90	12.00
6	10.00	12.90	14.00
7	12.00	14.90	16.00
8	14.00	16.90	18.00
9	16.00	18.90	20.00
10	18.00	20.90	22.00
11	20.00	22.90	24.00
12	22.00	24.90	26.00
13	24.00	26.90	28.00
14	26.00	28.90	30.00
15	28.00	30.90	32.00

RoHS Compliant	<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	 SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1	TOLERANCE : .000 : ±0.08 .00 : ±0.13 .0 : ±0.25
DWG. 製圖 BETTY		SIZE: 紙張尺寸 A 4
DATE 制表日 2009/04/03	REV. 版次 A	PART NAME 品名 2.0mm HOUSING XXP WHITE COLOR ROHS LOW-LEAD
		PART NO. 料號 H2005-XXPW0000R

1 2 3 4 5 6 7 8