


**Features:**

- 2 ~ 4 circuits available
- Body: PBT + 15%GF, White
- Cover: PBT + 15%GF, Orange
- Waterproof ring: Oil silicone, Blue
- Waterproof plug: Oil silicone, Light blue
- Inner-housing lock construction
- Disconnectable crimp style
- Waterproof grade: IPX7 of IEC 60529

**Specification:**

- Current rating: 3A AC, DC ( #22 AWG )
- ⚠️ • Voltage rating: 250V AC, DC
- ⚠️ • Insulation resistance: 1000MΩ Min.
- ⚠️ • Dielectric withstanding voltage: 1500V AC/minute
- ⚠️ • Ambient temperature range: -40°C ~ 105°C (Including temperature rise)

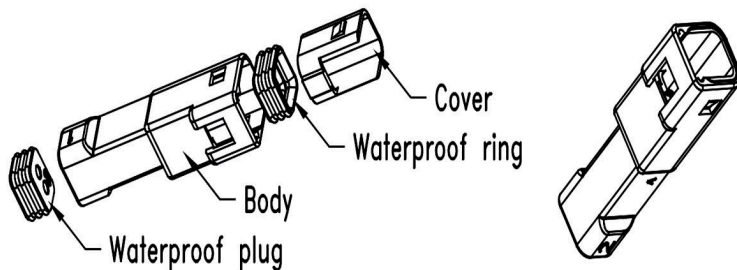

Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
2	2.0	7.0	7.0	5.9	8.1
3	4.0	9.0	9.0	5.9	8.4
4	6.0	11.0	11.0	5.9	8.4

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准		UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.08 ( mm ) .00 ± 0.25 ( mm ) .0 ± 0.4 ( mm )	PART NAME 品名 2.0MM WATERPROOF CRIMP TERMINAL HOUSING FEMALE XXPIN BODY MATERIAL:PBT BODY COLOR:WHITE COLOR WATERPROOF PLUG:LIGHT BLUE WATERPROOF RING:BLUE COLOR (MATERIAL:OIL SILICONE) COVER:ORANGE (MATERIAL:PBT) ROHS
DWG. 製圖	Betty	SCALE 比例 參考	PART NO. 料號 H2017-XXPPW7LAR
DATE 制表日 2020/10/27	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	
	PAGE 張數 1 OF 1	REV. 版次 A	