


1 2 3 4 5 6 7 8

A





Specifications:

- Material: Polyester, UL 94V-2
- Voltage Rating: 300V
- Current Rating: 12A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.
- Applicable Wire:AWG#14 TO #24

B

C

D

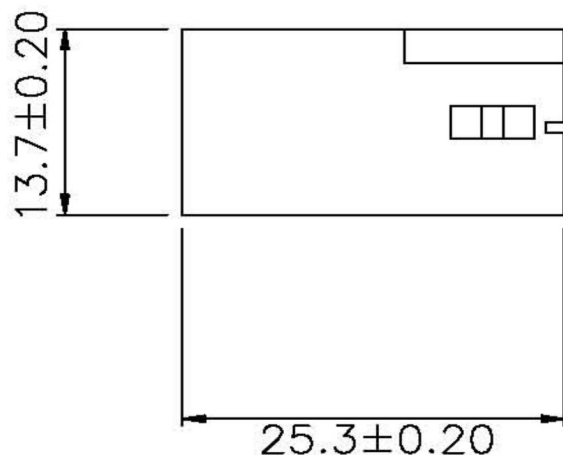

6.4±0.20

E

F

G

H

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 φ2.36mm MALE HOUSING 1X2P W/O LOCKING RIBS W/O EAR WHITE COLOR ROHS LOW LEAD
DWG. 製圖 Yumi	SCALE 比例 參考	SIZE 紙張尺寸 A4	PART NO. H2130-02PSNW00R
DATE 制表日 2010/06/21	UNIT 單位 MM	REV. 版次 A	料號
	PAGE 張數 1 OF 1		

1 2 3 4 5 6 7 8