





1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

**Specifications:**

- Material: Polyester, UL 94V-2
- Voltage Rating: 300V
- Current Rating: 12A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10m max.  
After environmental testing/20mΩ max.
- Applicable Wire: AWG#14 TO #24

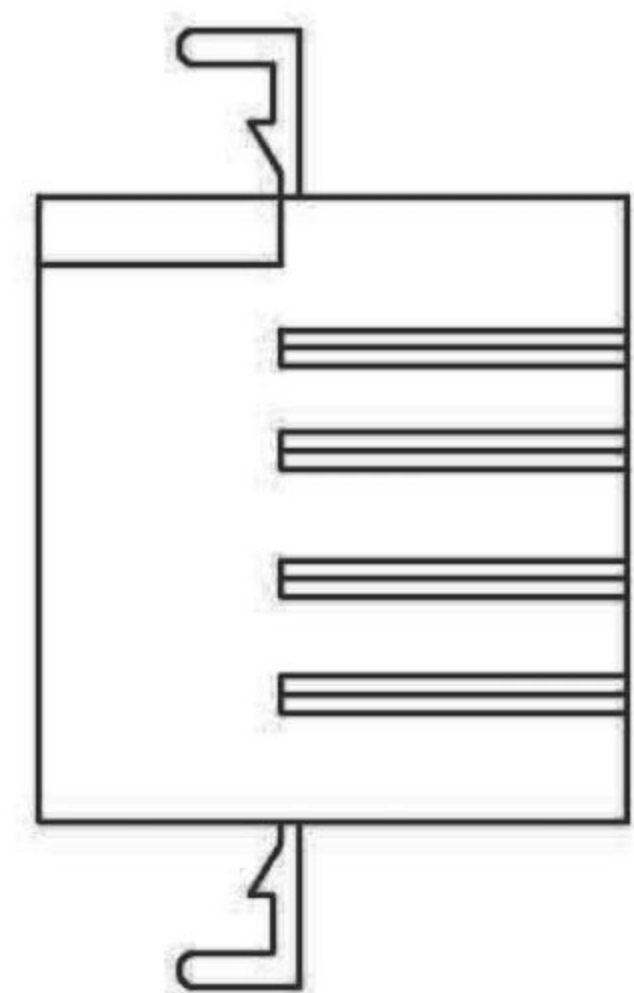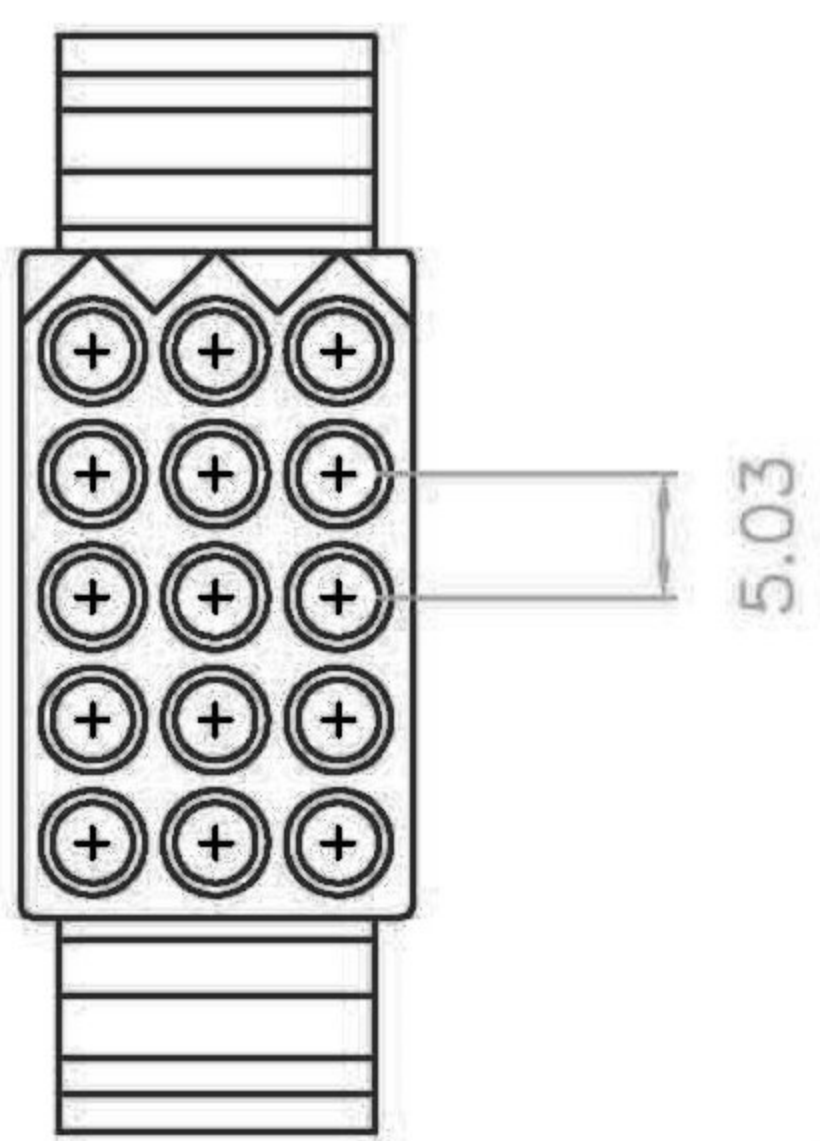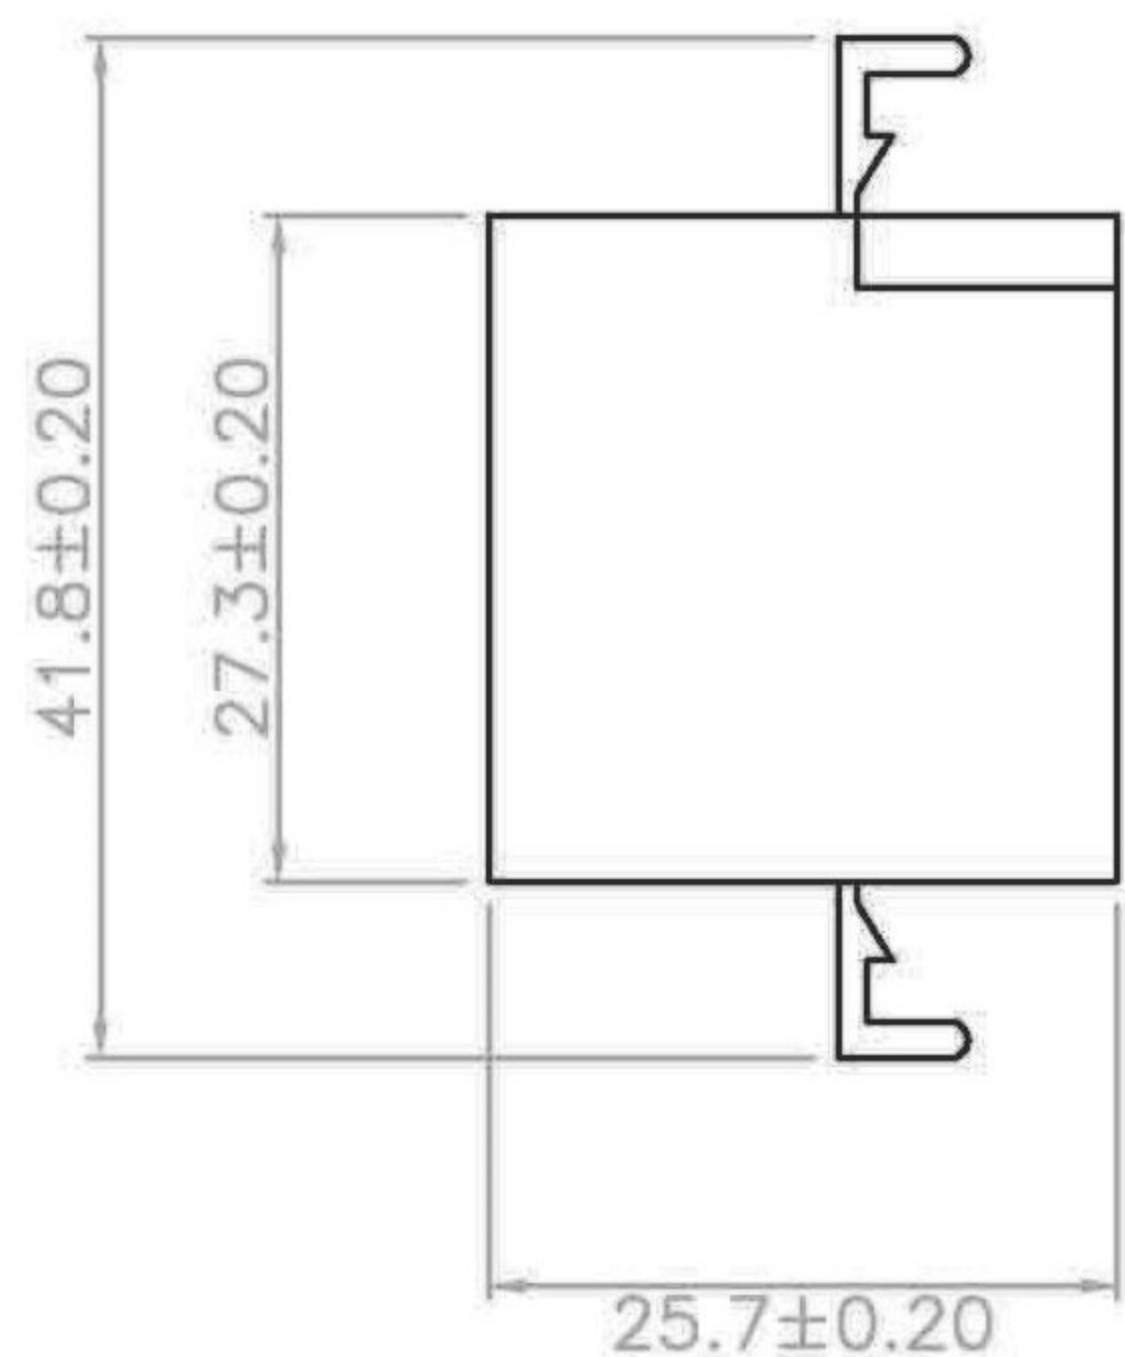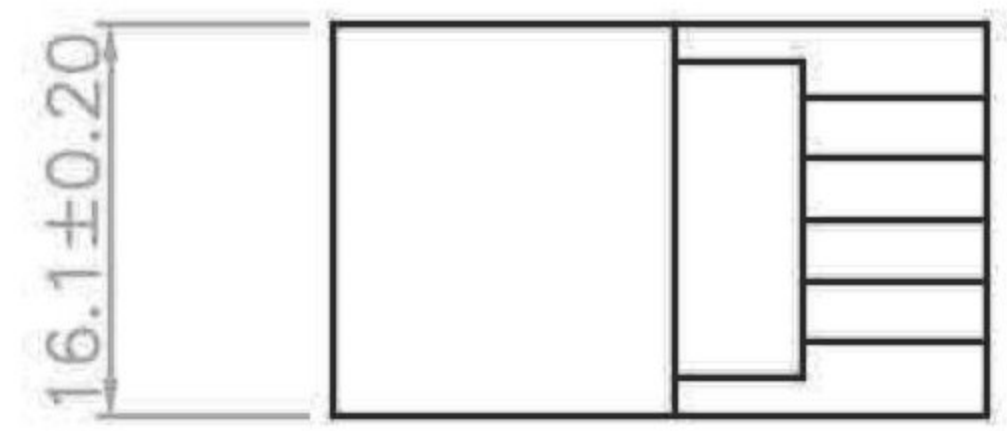

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 2.36φ MALE HOUSING 3X5P W/ RIGHT ANGLE EAR WHITE COLOR ROHS
DWG. 製圖 HELEN	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 H2130-15PTRW00R
DATE 制表日 2011/9/22	PAGE 張數 1 OF 1	REV. 版本 A	

1 2 3 4 5 6 7 8