


### Features:

- 2 ~ 15 circuits available
- UL 94V-2 nylon 66
- With locking ramp
- Molded in locking arm for terminal

### Specifications:

- Current rating: 7A Max.
- Voltage rating: 250V AC Max.
- Dielectric strength: 1500V AC/minute
- Insulation resistance: DC 500V, 1000MΩ Min.
- Temperature range: -40°C ~ 105°C

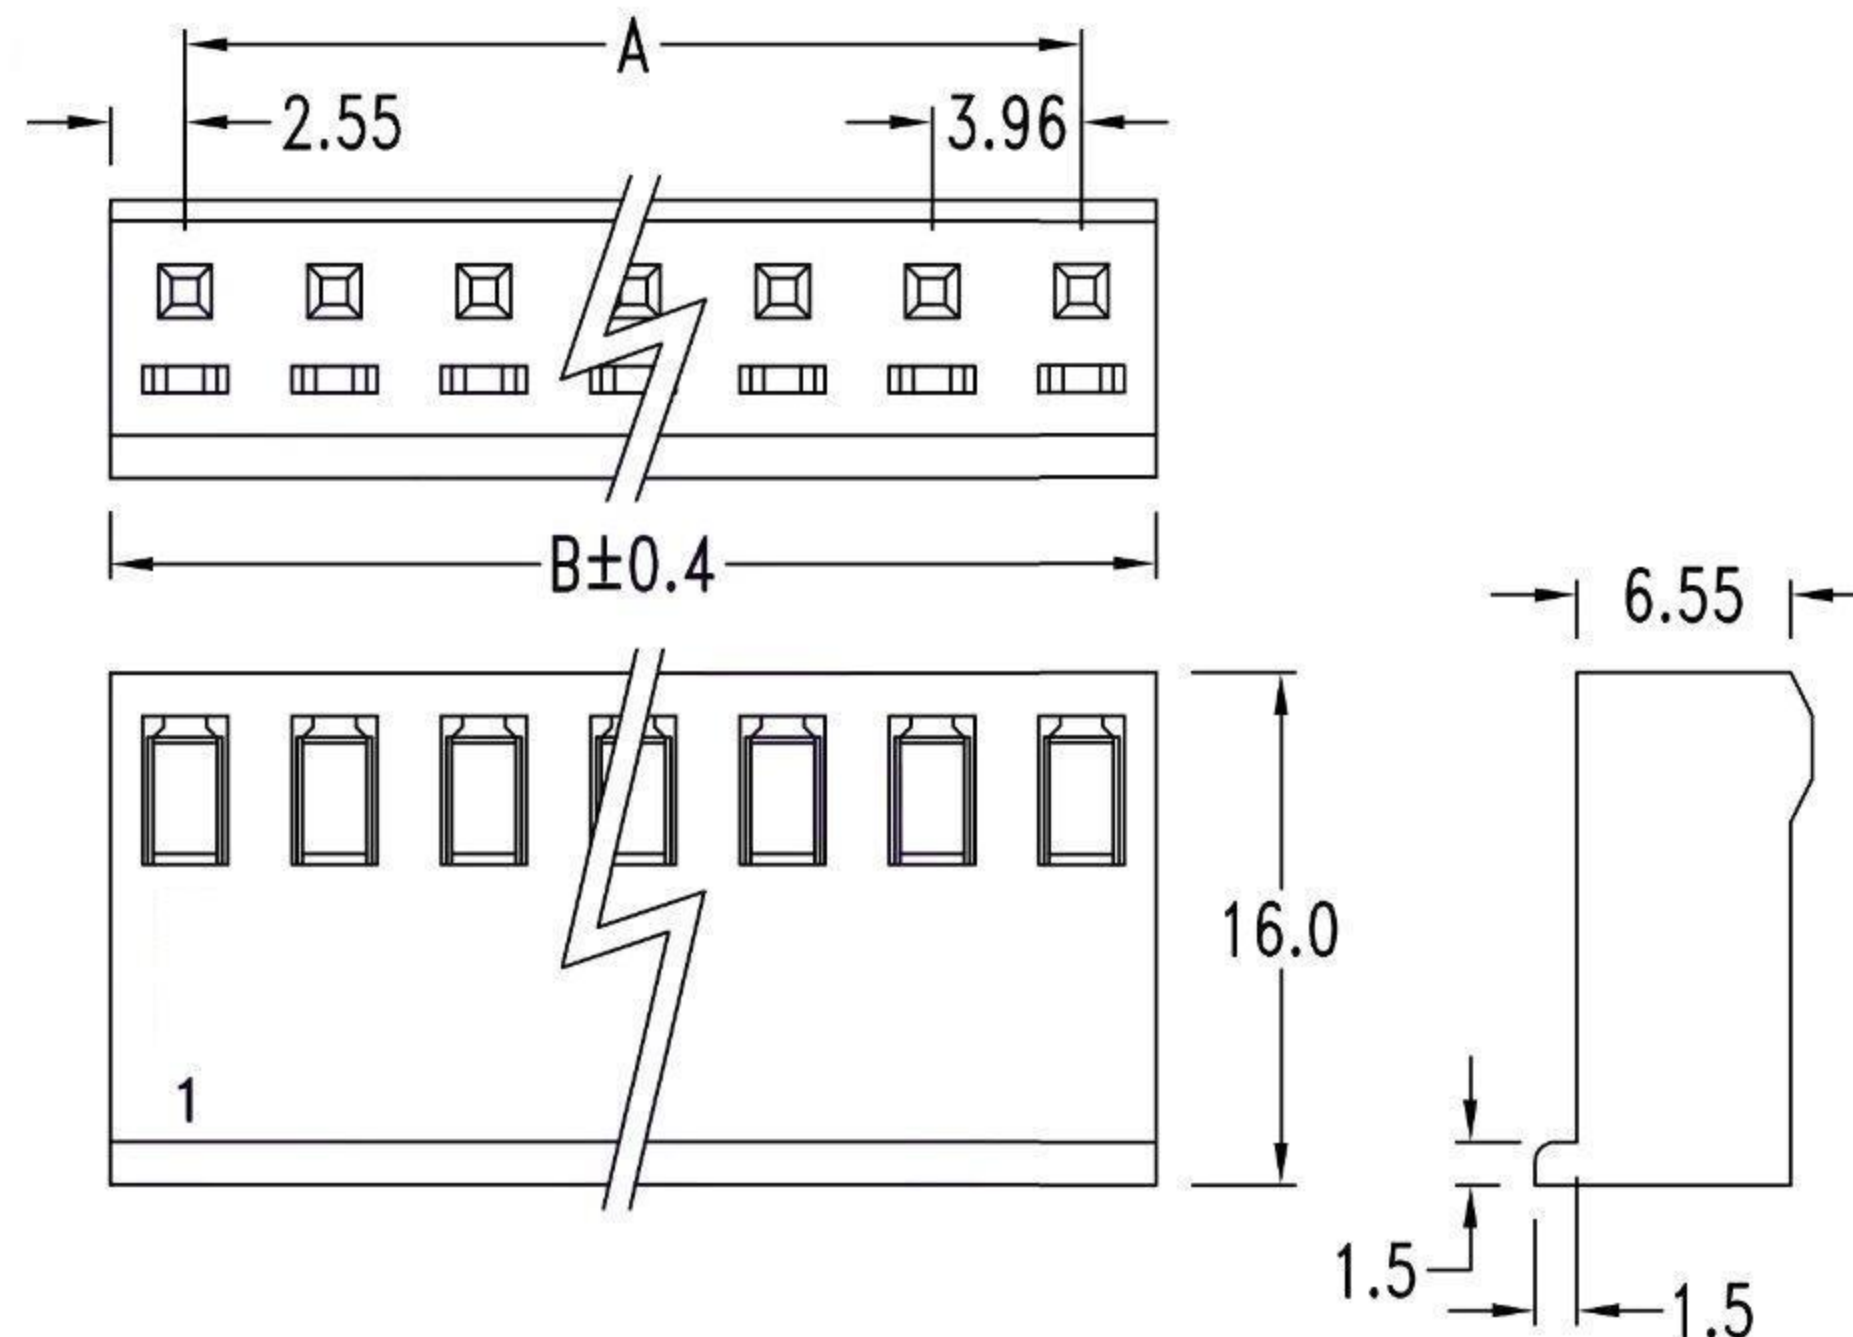

Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.96	9.06	7	23.76	28.86	12	43.56	48.66
3	7.92	13.02	8	27.72	32.82	13	47.52	52.62
4	11.88	16.98	9	31.68	36.78	14	51.48	56.58
5	15.84	20.94	10	35.64	40.74	15	55.44	60.54
6	19.80	24.90	11	39.60	44.70			

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE .000 ± 0.38 .00 ± 0.25 .0 ± 0.40	PART NAME 品名 MX 3.96mm HOUSING XXP WITH LOCKING RAMP & WITH LOCKING ARM WHITE COLOR (NYLON 66 UL94V-2) ROHS
DWG. 製圖 KAREN	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 H2411-XXPYW000R
DATE 制表日 2014/02/24	PAGE 張數 1 OF 1	REV. 版本 A	