
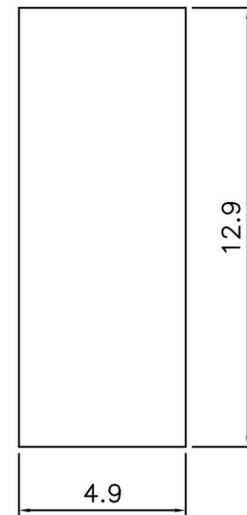
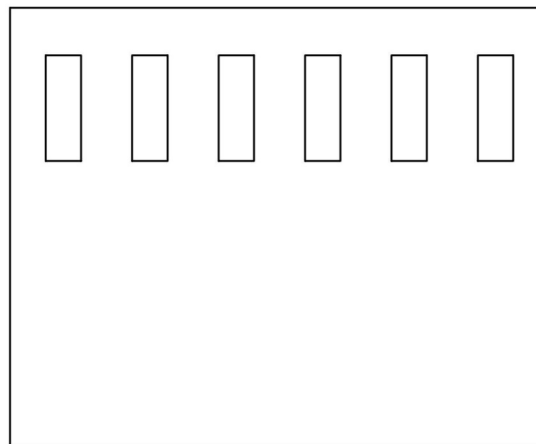


Poles: 2-20
 Material: Nylon 66, UL94V-2
 Q'ty: 500, 1000 pcs/bag

SPECIFICATIONS

Voltage rating: AC 250V
 Current rating: AC,DC,3A
 Withstand voltage: AC 1000 V/min.
 Insulation resistance: 1000 mΩ min.
 Temperature range: -25° C~+85° C
 Applicable PC board thickness: 0.8~1.6mm
 Contact resistance: Initial value/10 mΩ max.
 After environmental Testing/20 mΩ max.

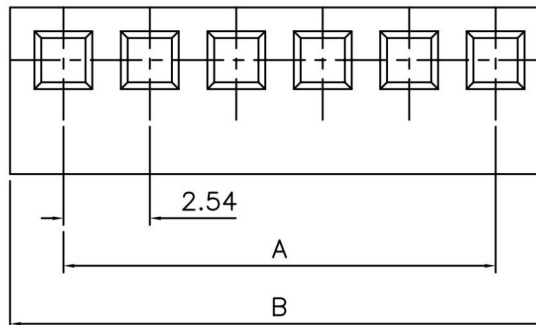

Poles	Dimension in. (mm)	
	A	B
2	0.10(2.54)	0.223(5.68)
3	0.20(5.08)	0.324(8.22)
4	0.30(7.62)	0.424(10.76)
5	0.40(10.16)	0.524(13.30)
6	0.50(12.70)	0.624(15.84)
7	0.60(15.24)	0.724(18.38)
8	0.70(17.78)	0.824(20.92)
9	0.80(20.32)	0.924(23.46)
10	0.90(22.86)	1.024(26.00)
11	1.00(25.40)	1.124(28.54)
12	1.10(27.94)	1.224(31.08)
13	1.20(30.48)	1.324(33.62)
14	1.30(33.02)	1.424(36.16)
15	1.40(35.56)	1.524(38.70)
16	1.50(38.10)	1.624(41.24)
17	1.60(40.64)	1.724(43.89)
18	1.70(43.18)	1.824(46.32)
19	1.80(45.72)	1.924(48.86)
20	1.90(48.26)	2.024(50.80)

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名
DWG. 製圖	BETTY		2.54mm HOUSING 1XXXXP WITHOUT LOCKING RIBS BEIGE INSULATOR ROHS
DATE 制表日	2010/01/07	UNIT 單位 M M	PART NO.
		PAGE 張數 1 OF 1	料號 H2510-XXPNC000R
		REV. 版次 A	