

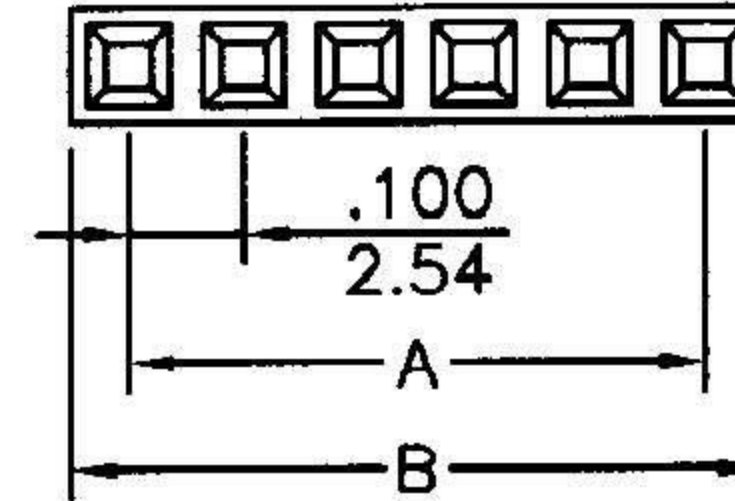


- * Poles: 2 ~ 40
 - * Material: PBTP UL94V-0 BLACK
- Specifications**
- * Current rating: 3A AC, DC
 - * Voltage rating: 250V AC, DC
 - * Temperature range: -25°C ~ +85°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 1,000V AC/minute

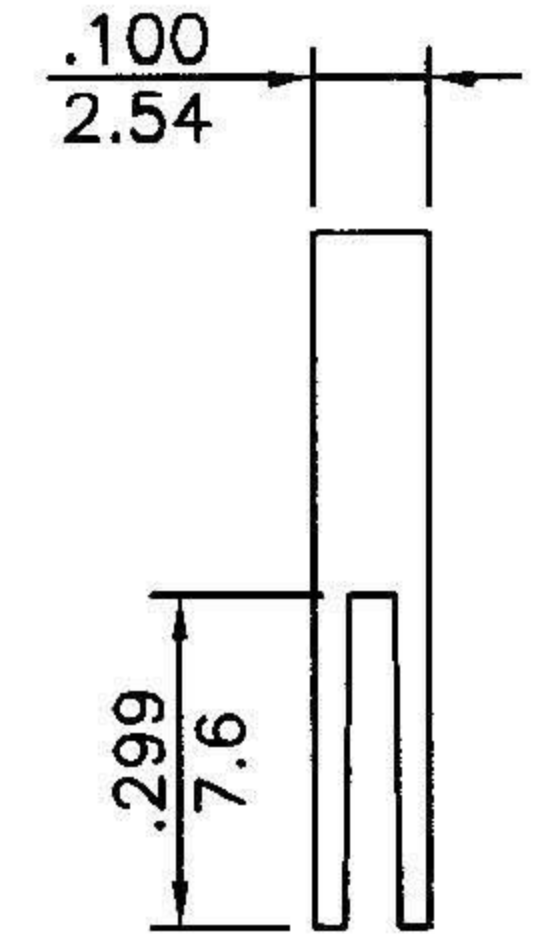

inches
mm

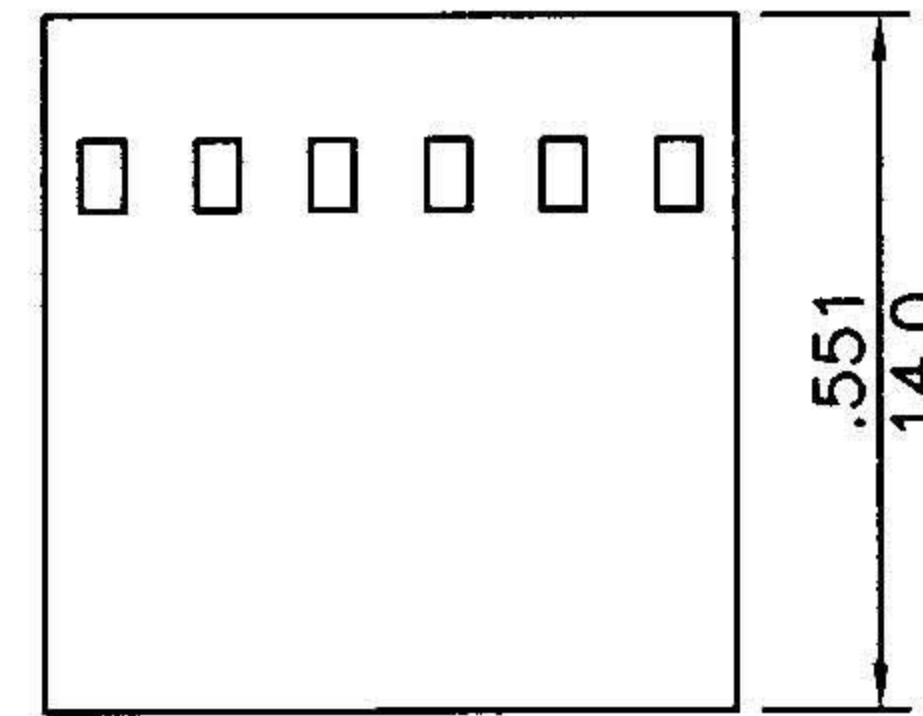

CIRCUITS	DIMENSION	
	A	B
2	0.100(2.54)	0.200(5.08)
3	0.200(5.08)	0.300(7.62)
4	0.300(7.62)	0.400(10.16)
5	0.400(10.16)	0.500(12.70)
6	0.500(12.70)	0.600(15.24)
7	0.600(15.24)	0.700(17.78)
8	0.700(17.78)	0.800(20.32)
9	0.800(20.32)	0.900(22.86)
10	0.900(22.86)	1.000(25.40)
11	1.000(25.40)	1.100(27.94)
12	1.100(27.94)	1.200(30.48)
13	1.200(30.48)	1.300(33.02)
14	1.300(33.02)	1.400(35.54)

CIRCUITS	DIMENSION	
	A	B
15	1.400(35.54)	1.500(38.10)
16	1.500(38.10)	1.600(40.64)
17	1.600(40.64)	1.700(43.18)
18	1.700(43.18)	1.800(45.72)
19	1.800(45.72)	1.900(48.26)
20	1.900(48.26)	2.000(50.80)
21	2.000(50.80)	2.100(53.34)
22	2.100(53.34)	2.200(55.88)
23	2.200(55.88)	2.300(58.42)
24	2.300(58.42)	2.400(60.96)
25	2.400(60.96)	2.500(63.50)
30	2.900(73.66)	3.000(76.20)
40	3.900(99.06)	4.000(101.60)

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	 TOLERANCE 容許公差 .0 ± .00 ± ANG. ± SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	PART NAME 品名 2.54mm F.P.C. HOUSING SINGLE ROW XXP BLACK INSULATOR ROHS LOW-LEAD
DWG. 製圖 ABBY		
DATE 制表日 2011/05/19	REV. 版本 A	PART NO. 料號 H2548-XXPB0000R