

1 2 3 4 5 6 7 8

A

B

C


D

E

F

G

H

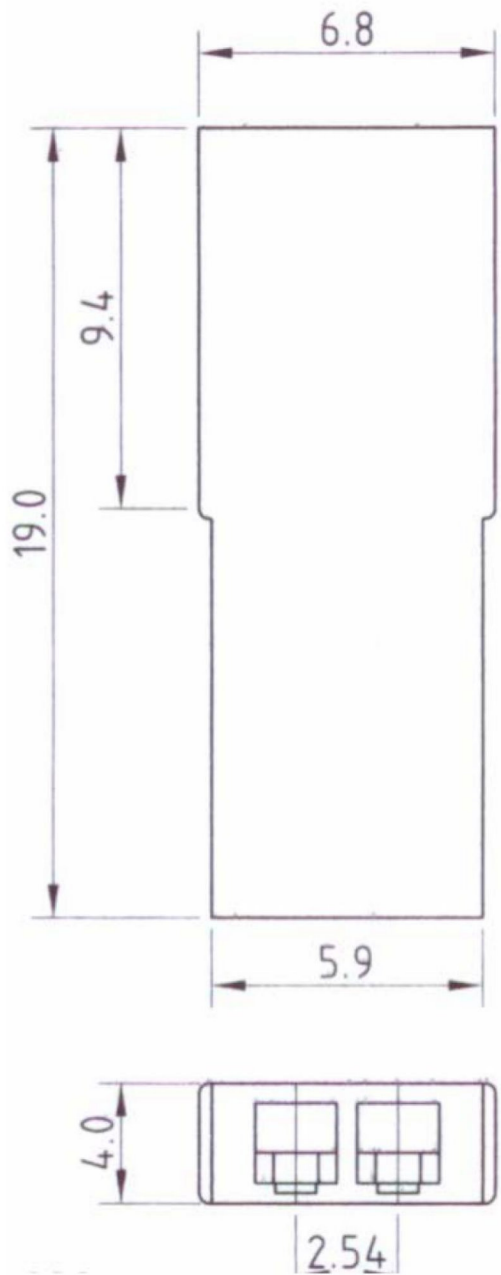

SPECIFICATION:

PITCH BETWEEN POLES : 2.54mm
 CURRENT RATING 3A
 VOLTAGE RATING : 250V
 CONTACT RESISTANCE : INITIAL VALUE/10mΩ max.
 AFTER ENVIRONMENTAL TESTING/20mΩ max.
 INSULATION RESISTANCE :1000 MΩ(min.)
 WITHSTAND VOLTAGE : 800V AC/MINUTE
 APPLICABLE WIRE: AWG#22 TO #28
 TEMPERATURE RANGE : -25°C TO +85°C
FEATURES:
 AVAILABLE NUMBER OF CIRCUITS 2
 MATERIAL : NYLON 66 UL94V-0

A

B

C

D

E

F

G

H

1 2 3 4 5 6 7 8

APPD. 核准 BETTY		SCALE 比例 參考	TOLERANCE: .000 ±0.08 .00 ±0.13 .0 ±0.25	PART NAME 品名 JST RCY 2.54mm FEMALE HOUSING 2P RED COLOR NYLON 66 UL94V-0 ROHS		
DWG. 製圖 BETTY				UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 H2554-02PR1000R
DATE 制表日 2011/09/23		PAGE 張數 1 OF 1	REV. 版本 A			

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.