
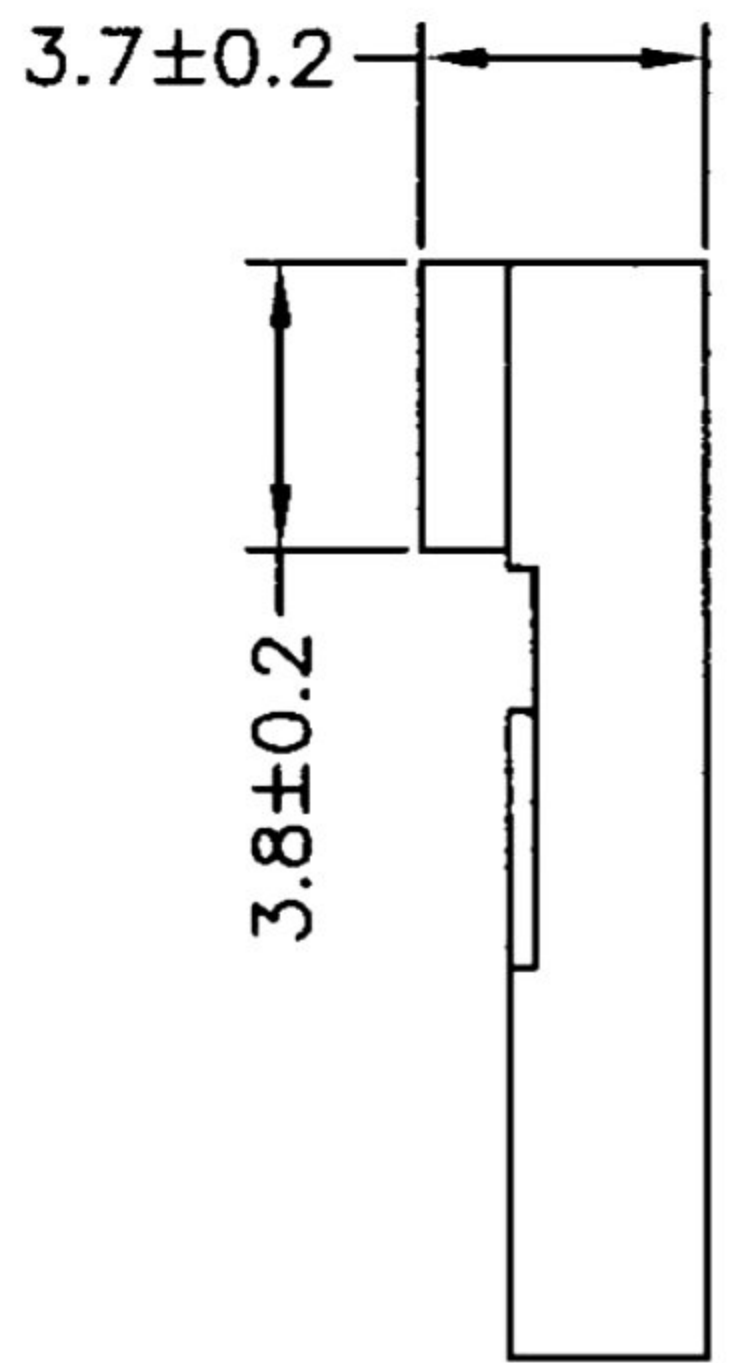


Specifications

- * Poles: 2~10
- * Material: NORYL UL94V-1 BLACK
- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute

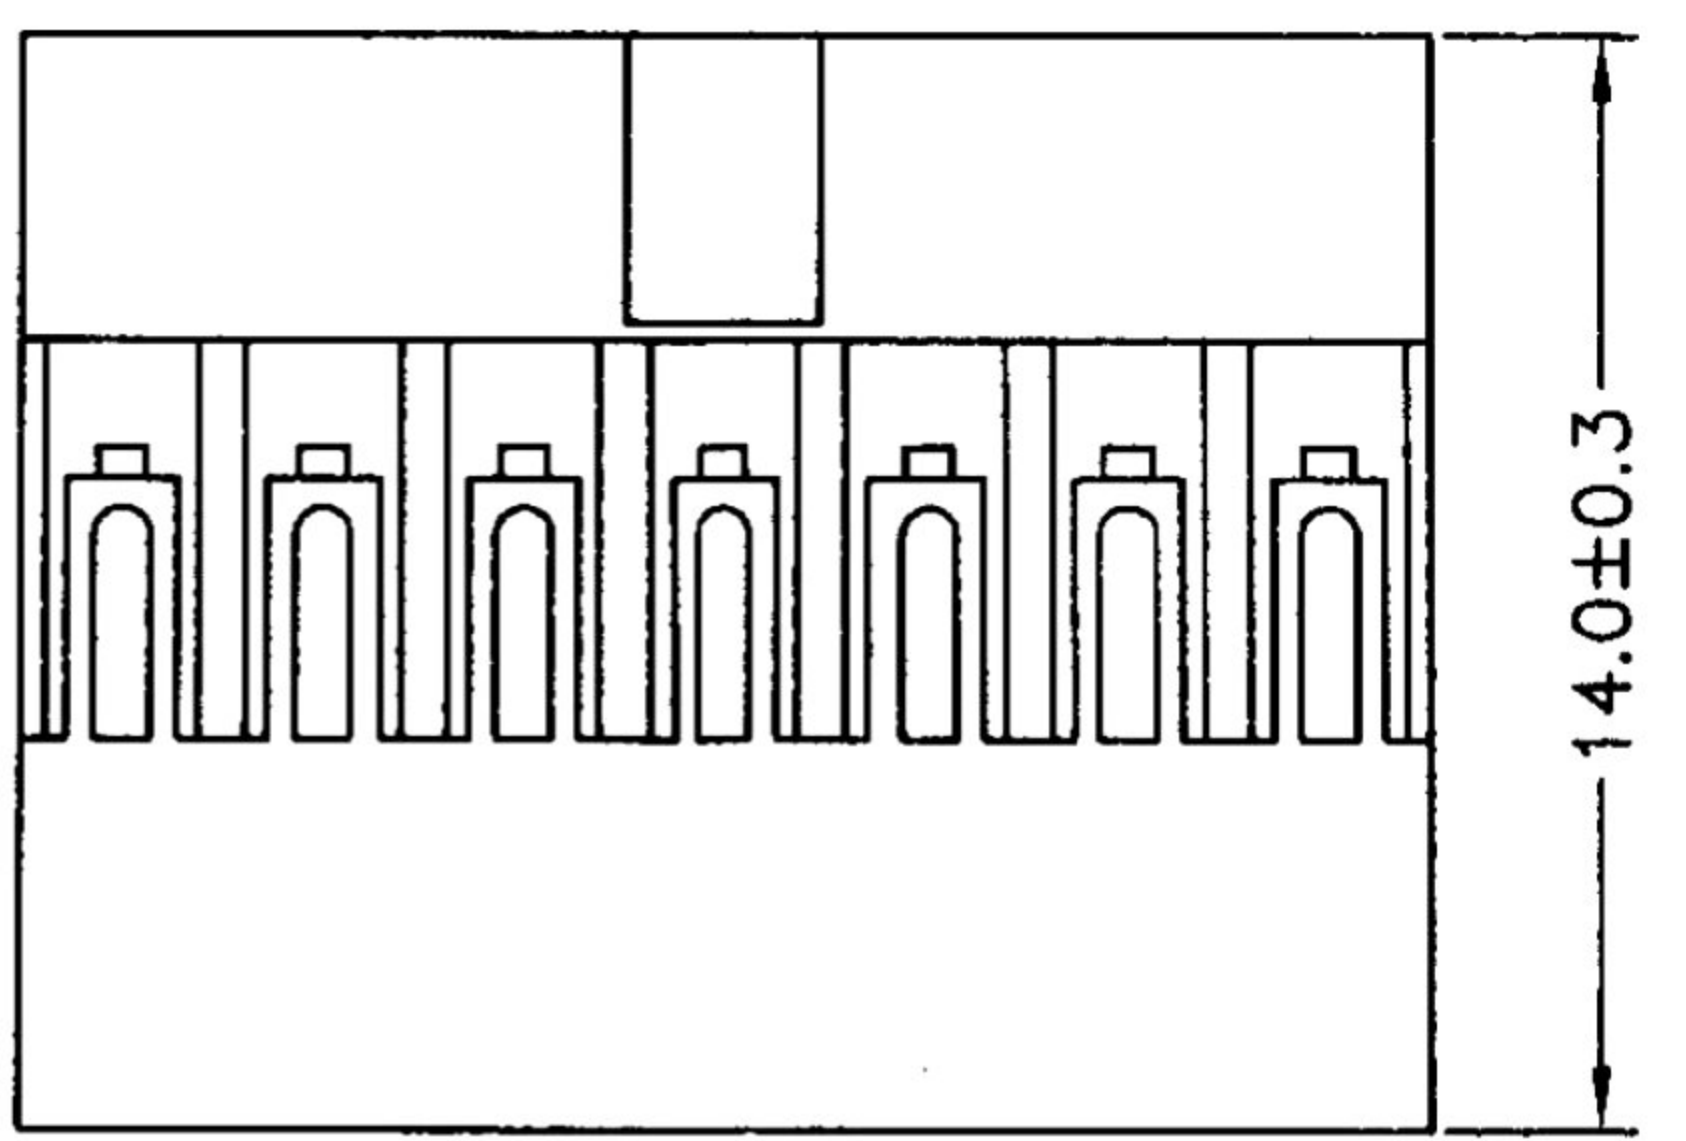

CIRCUITS	DIM.A	DIM.B
2	2.54	5.28
3	5.08	7.82
4	7.62	10.36
5	10.16	12.90
6	12.70	15.44
7	15.24	17.98
8	17.78	20.52
9	20.32	23.06
10	22.86	25.60

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .0 ±0.25 .00 ±0.2 ANG±	PART NAME 品名 2.54mm HOUSING SINGLE ROW 02~10P WITH BUMP BLACK COLOR ROHS
DWG. 製圖 ABBY			
DATE 制表日 2014/10/20	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 H4000-02~10PSYB00R