

**Features:**

- 2 ~ 12 circuits available
- Material: UL 94V-0 nylon
- Standard color: Black
- Accepts T4030 series terminals

**Specifications:**


- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Amps	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000mΩ Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.  
(carry rated current load)

**Dimensional Information ( mm )**

Circuits	Dim. A	Dim. B	Dim. C	Dim. D
2	3.0±0.08	6.85	7.21	10.9
3	6.0±0.10	9.85	10.21	13.9
4	9.0±0.10	12.85	13.21	16.9
5	12.0±0.10	15.85	16.21	19.9
Circuits	Dim. A	Dim. B	Dim. C	Dim. D
6	15.0±0.15	18.85	19.21	22.9
7	18.0±0.15	21.85	22.21	25.9
8	21.0±0.15	24.85	25.21	28.9
9	24.0±0.15	27.85	28.21	31.9
Circuits	Dim. A	Dim. B	Dim. C	Dim. D
10	27.0±0.20	30.85	31.21	34.9
11	30.0±0.20	33.85	34.21	37.9
12	33.0±0.20	36.85	37.21	40.9

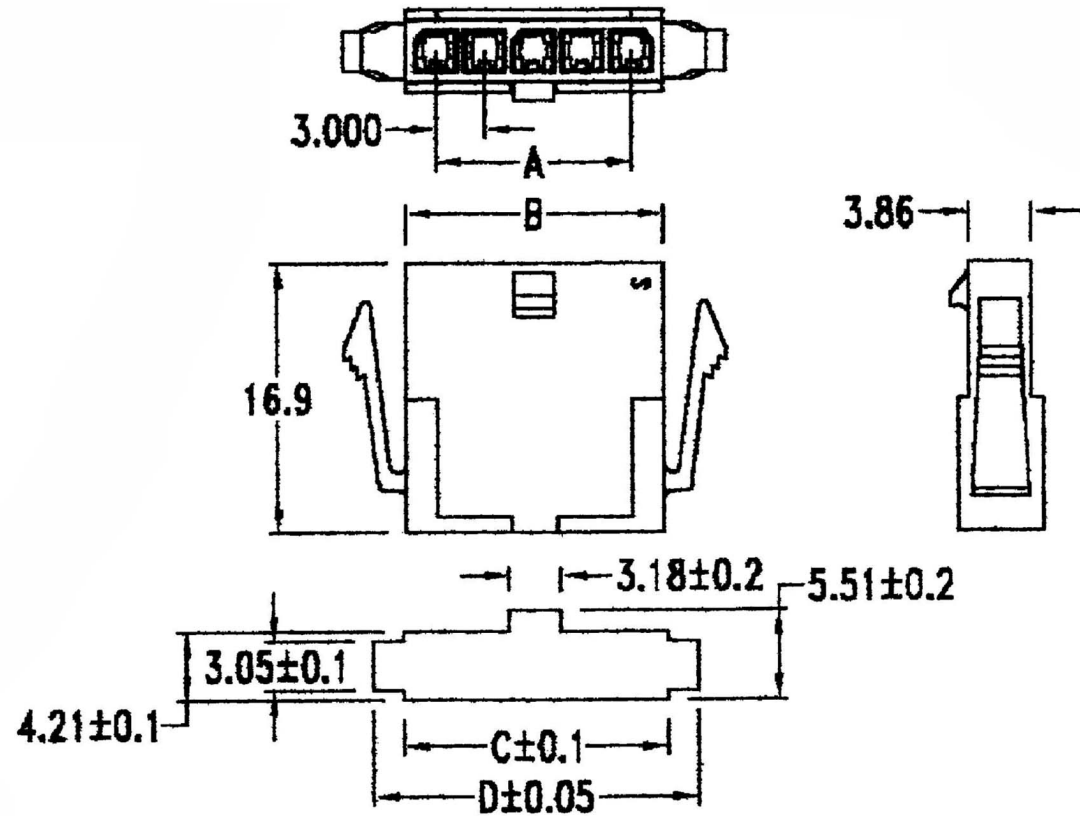

**PANEL OPENING [ Recommended panel thickness: .062" (1.57mm) ]**

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel	SCALE 比例 参考	UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.08 ( mm ) .00 ± 0.25 ( mm ) .0 ± 0.4 ( mm )	PART NAME 品名 MICRO-FIT 3.0 FEMALE HOUSING SINGLE ROW XXP BLACK INSULATOR ROHS LOW-LEAD
DWG. 製圖 Yumi	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 H4030-XXPSB000R
DATE 制表日 2009/07/02	PAGE 張數 1 OF 1	REV. 版本 A	