

Features:


- 2 ~ 8 circuits available
- Material: PA66 UL 94V-0 Black

Specification:

- ⚠ • Current rating: 14A at #16 AWG for 2 poles
8A at #16 AWG for other pole
- Voltage rating: 400V AC (RMS) or 400V DC Ma:
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1800V AC/minut
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
2	3.5	8.1
3	7.0	11.6
4	10.5	15.1
5	14.0	18.6
6	17.5	22.1
7	21.0	25.6
8	24.5	29.0

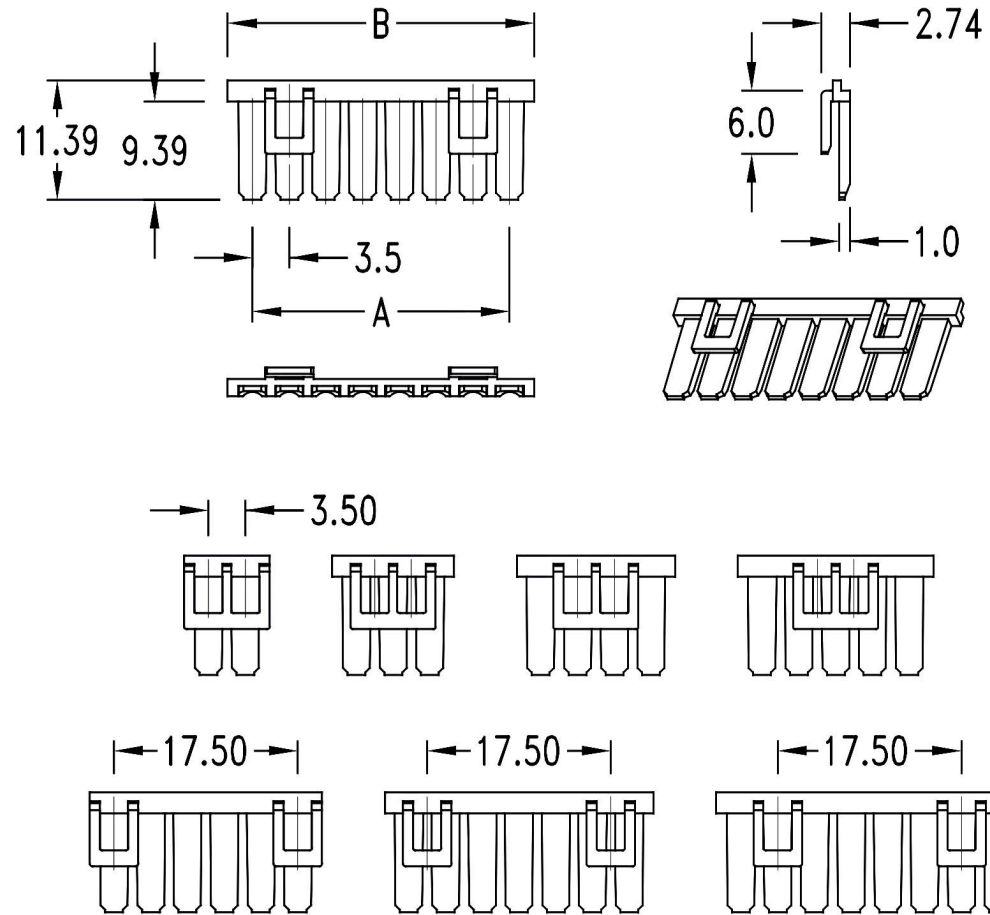

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.08 (mm) .00 ± 0.25 (mm) .0 ± 0.4 (mm)	PART NAME 品名 3.5mm 1XXXPin TPA Retainer (Terminal Position Assurance Retainer) Black Color Material:PA66 UL94V-0 ROHS
DWG. 製圖 Betty	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	PART NO. 料號 H4352-XXCABG00R
DATE 製表日 2019/03/15	PAGE 張數 1 OF 1	REV. 版次 A	