
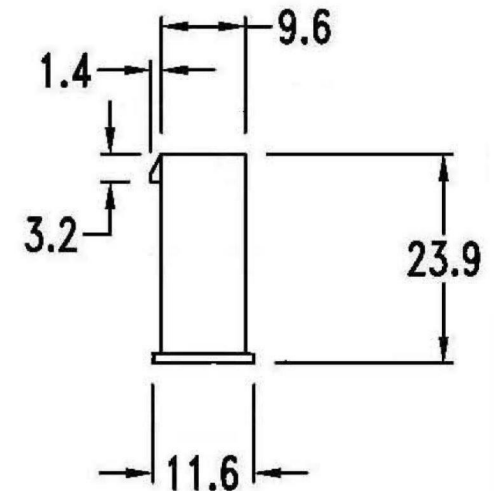
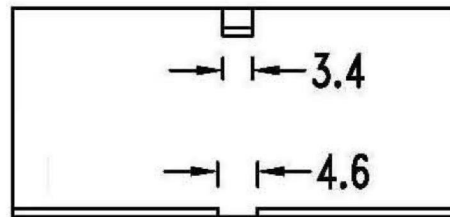


Features:

- 2 ~ 24 circuits available
- 600V volts rating (R.M.S.)
- Current rating up to 9 amperes per circuits
- Positive housing locks

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

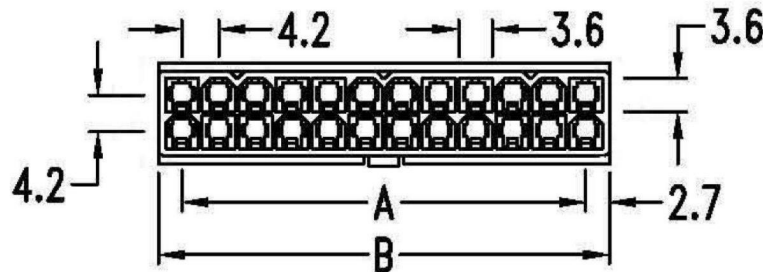

Specification:

- Current rating and wire size:

Wire Size	Circuits			
	2	4, 6	8, 10	12~24
# 18	9 A	8 A	7 A	6 A
# 20	7 A	6 A	5 A	5 A
# 22	5 A	4 A	4 A	4 A
# 24	4 A	3 A	3 A	3 A

- Voltage rating: 600V AC, DC
- Insulation resistance: DC 500V 1000MΩ min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

(including temperature rise)

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 .000 ± 0.08 .00 ± 0.25 .0 ± 0.4	PART NAME 品名 MINI FIT 4.2mm FEMALE HOUSING 2XXXP W/O MOUNTING EARS WHITE COLOR NYLON 66 UL94V-2 ROHS
DWG. 製圖 ABBY	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	PART NO. 料號 H5050-XXPDWA00R
DATE 製表日 2013/03/29	PAGE 張數 1 OF 1	REV. 版次 A	