


FEATURES:

- . 02~20 Circuits
- . With or Without locking ramp
- . Nylon [UL 94V-0] or [UL 94V-2]
- . Mates with .045[1.14mm] square or round pins
- . Terminal Retention to Housing-8lbs. [3.63kg] Minimum

SPECIFICATIONS:

- . Current rating: 7A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~+ 105°C
- . Contact resistance: Initial Value/10mΩ max.  
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable wires: AWG #22~#18

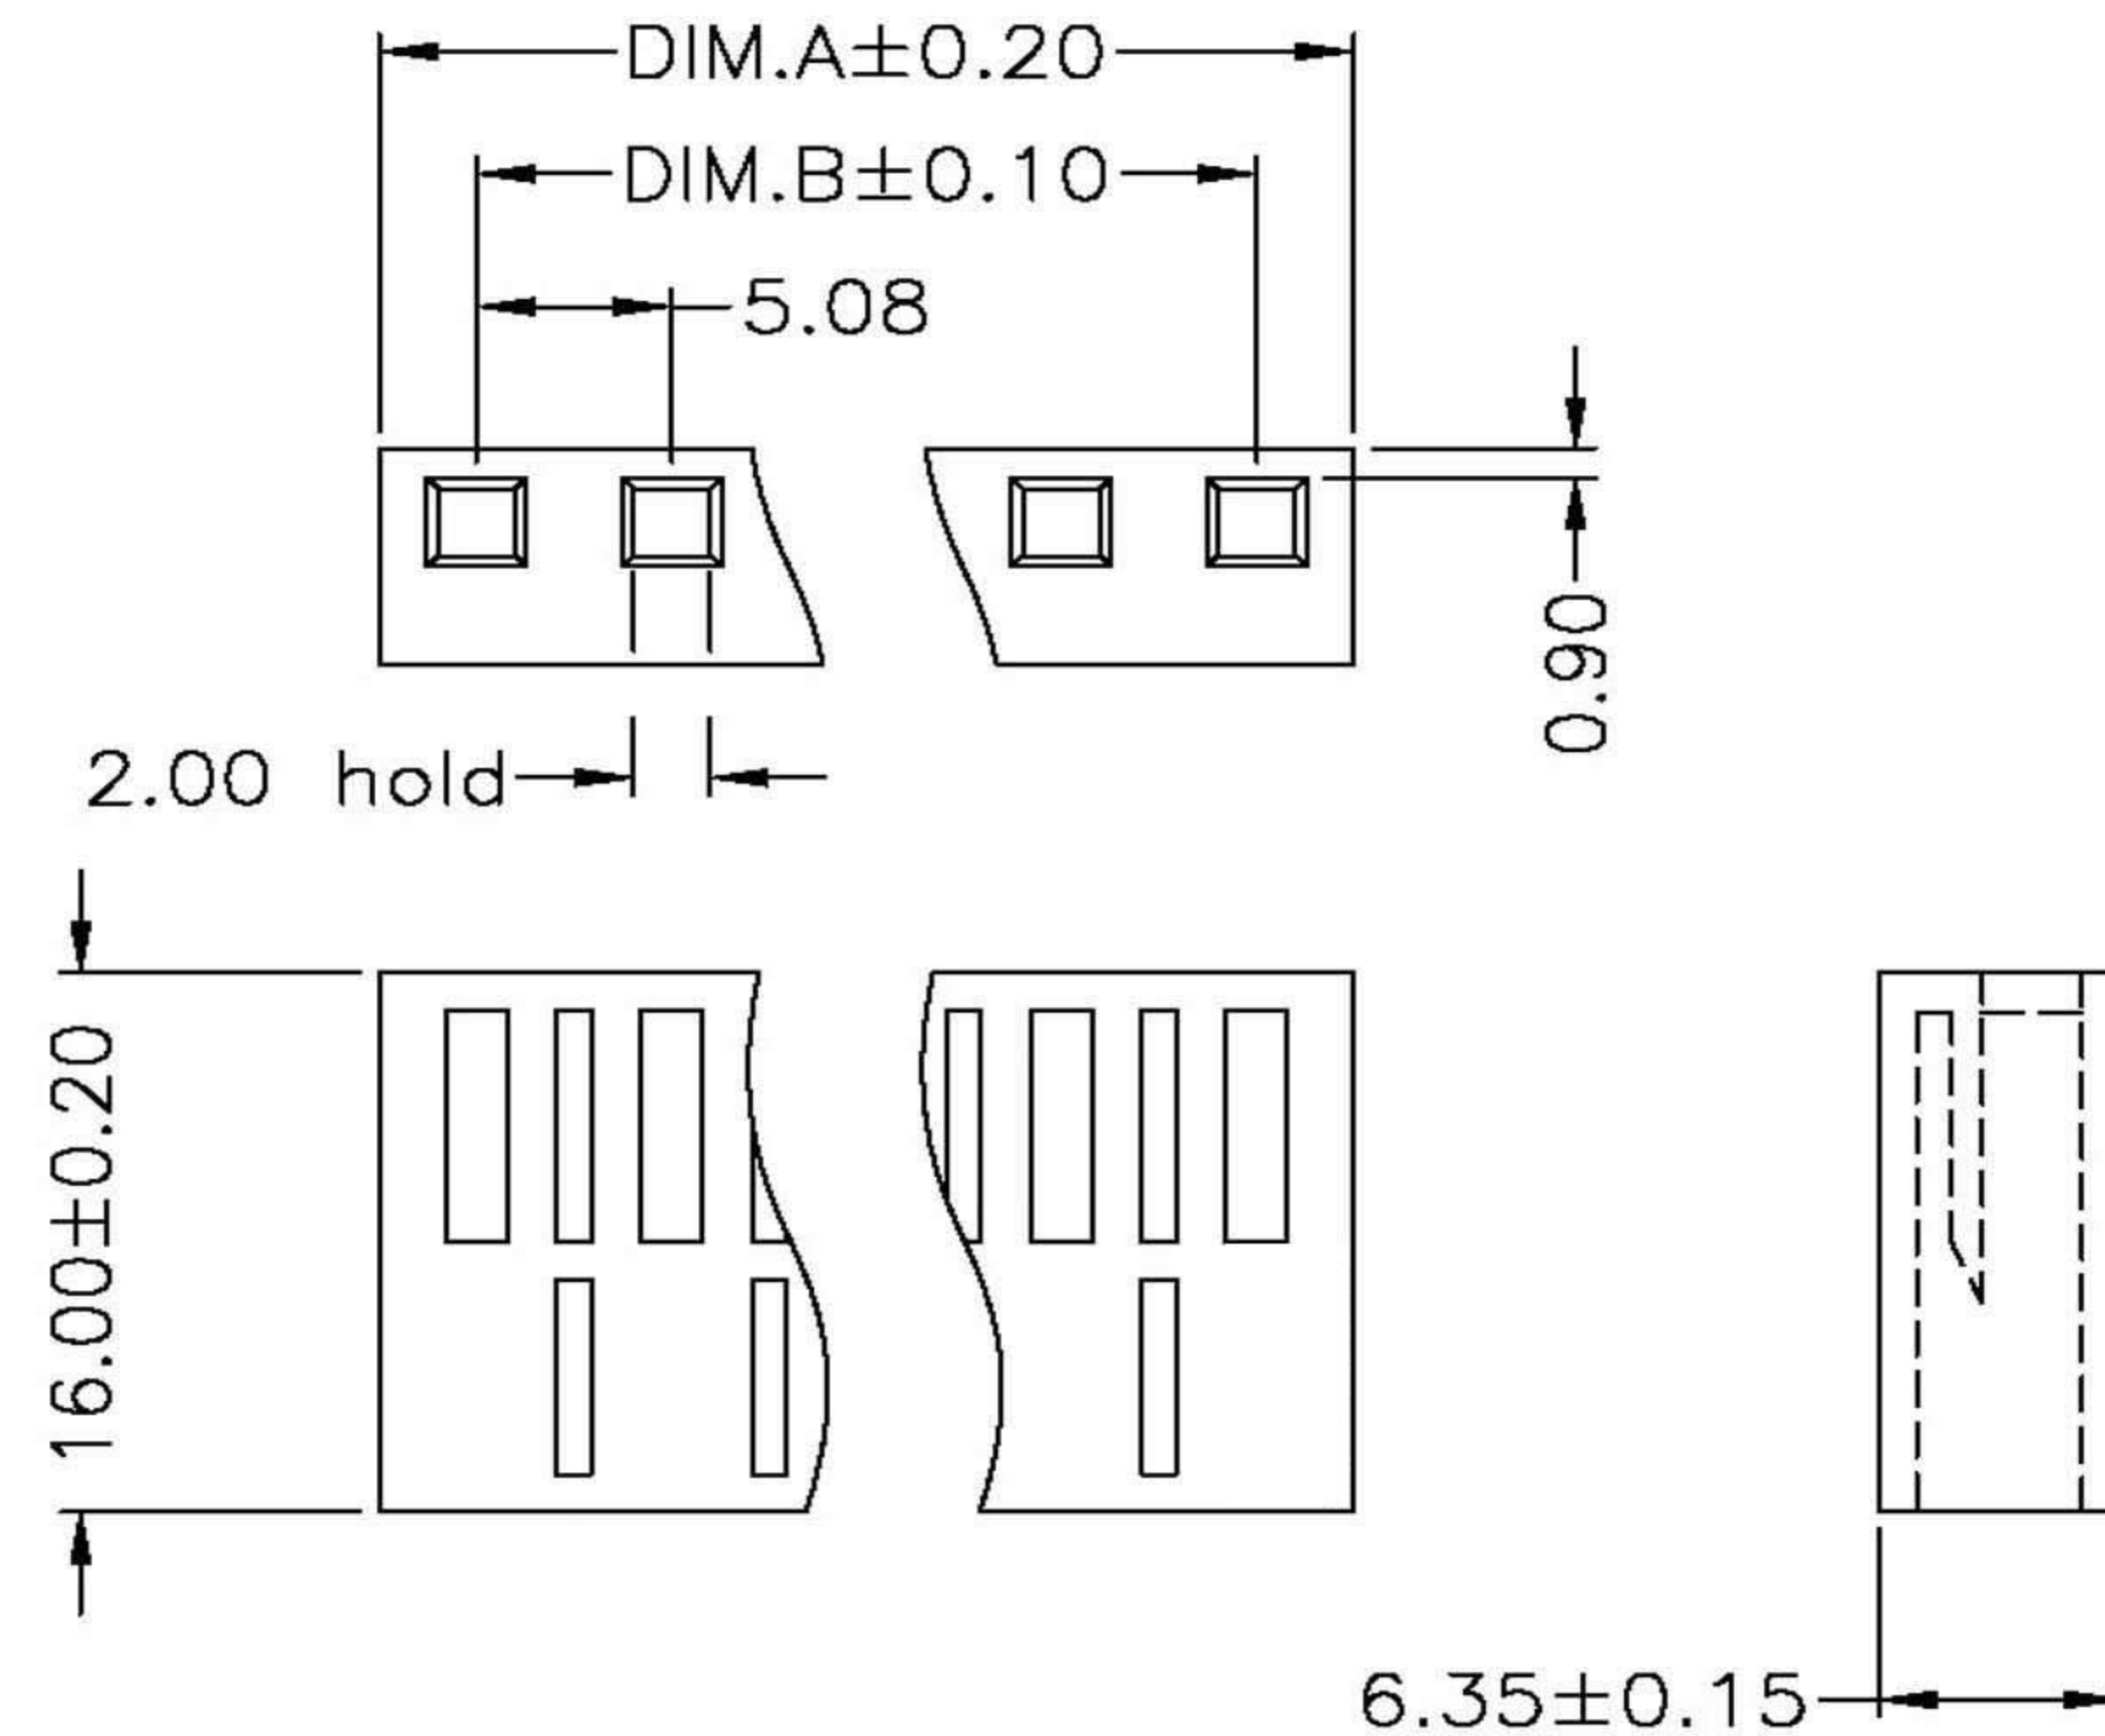

PIN數	DIM.A	DIM.B	PIN數	DIM.A	DIM.B	PIN數	DIM.A	DIM.B
02	10.16	5.08	09	45.72	40.64	16	81.28	76.20
03	15.24	10.16	10	50.80	45.72	17	86.36	81.28
04	20.32	15.24	11	55.88	50.80	18	91.44	86.36
05	25.40	20.32	12	60.96	55.88	19	96.52	91.44
06	30.48	25.40	13	66.04	60.96	20	101.6	96.52
07	35.56	30.48	14	71.12	66.04			
08	40.64	35.56	15	76.20	71.12			

RoHS Compliant		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 BETTY	 TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 5.08mm HOUSING 1XXXP W/O LOCKING RIBS WHITE COLOR ROHS LOW-LEAD	
DWG. 製圖 BETTY	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	SIZE 紙張尺寸 A4 REV. 版次 A	PART NO. 料號 H5090-XXPNWX00R
DATE 制表日 2009/09/30			