

1 2 3 4 5 6 7 8

P/N:H7070-XXPNB000R

P/N:H7070-XXPYB000R

inches  
mm

A

B

C

D

E

F

G

H

A

B

C

D


E

F

G


H

(NO. OF CONTACTS-1)X2.54

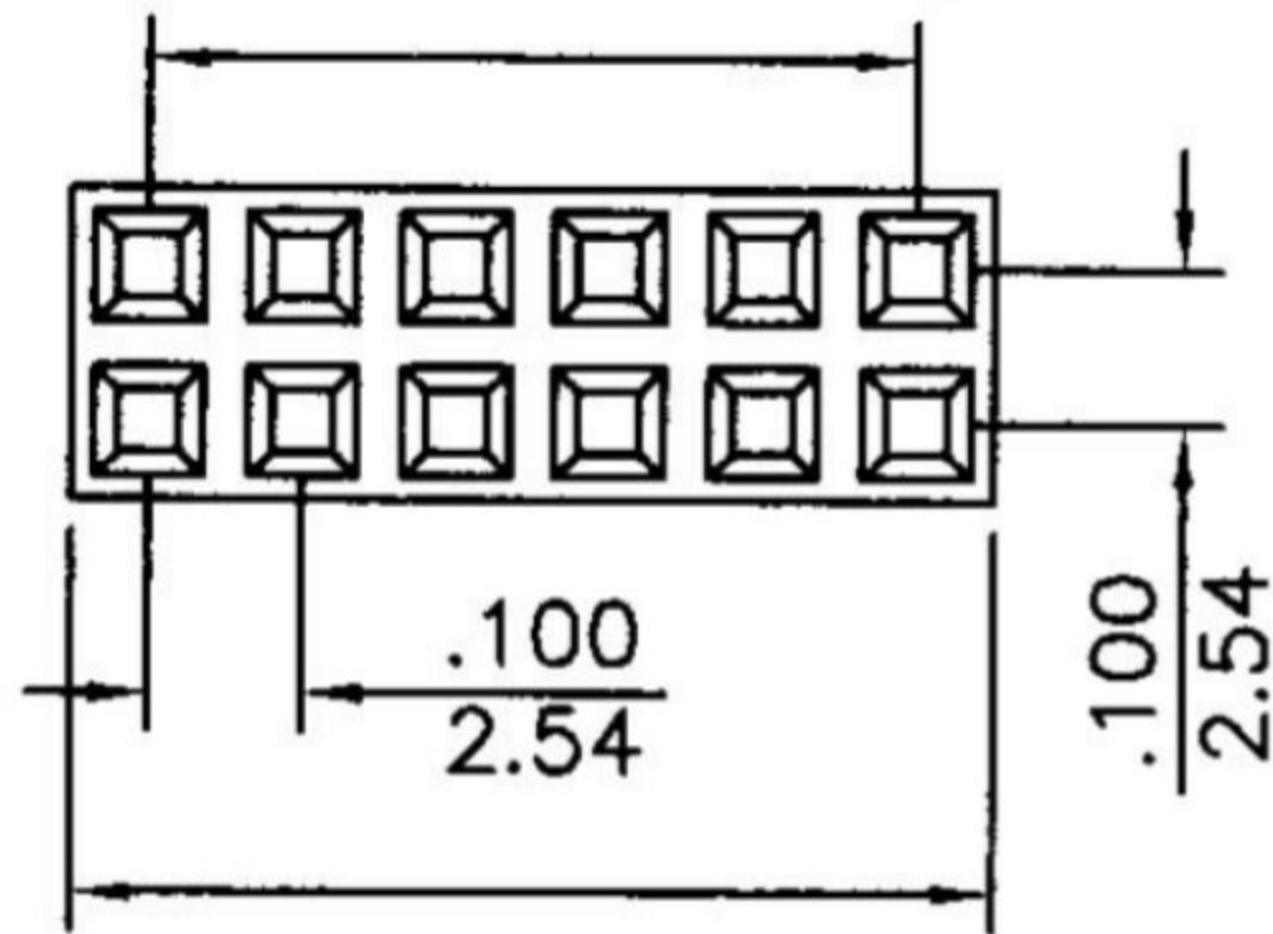


(NO. OF CONTACTS)X2.54+0.2



(NO. OF CONTACTS-1)X2.54

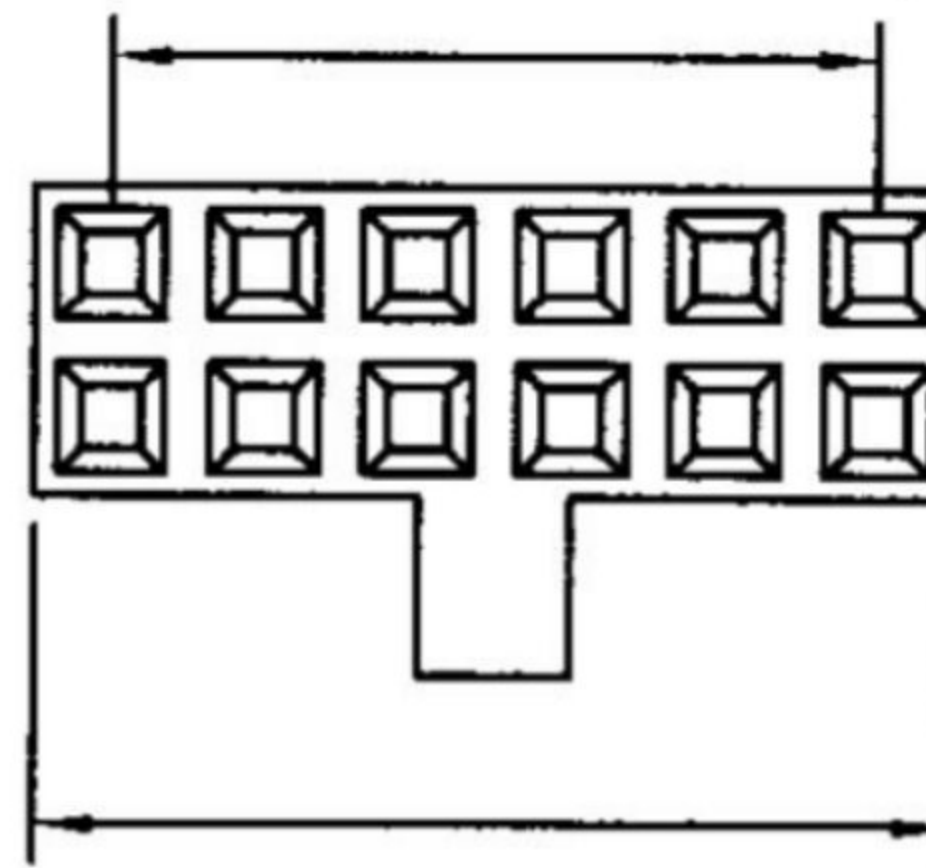

(NO. OF CONTACTS)X2.54+0.2

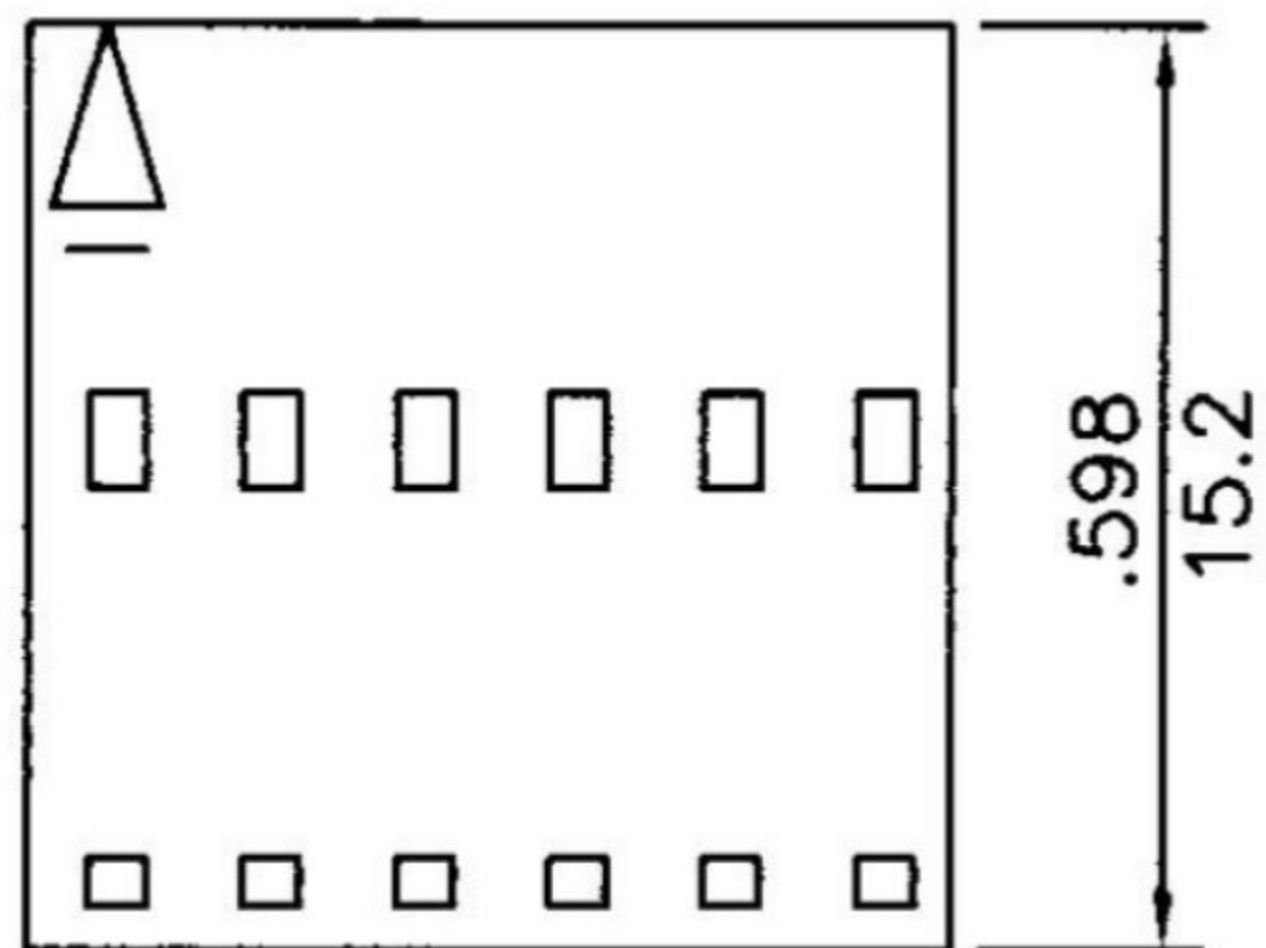

.205  
5.2

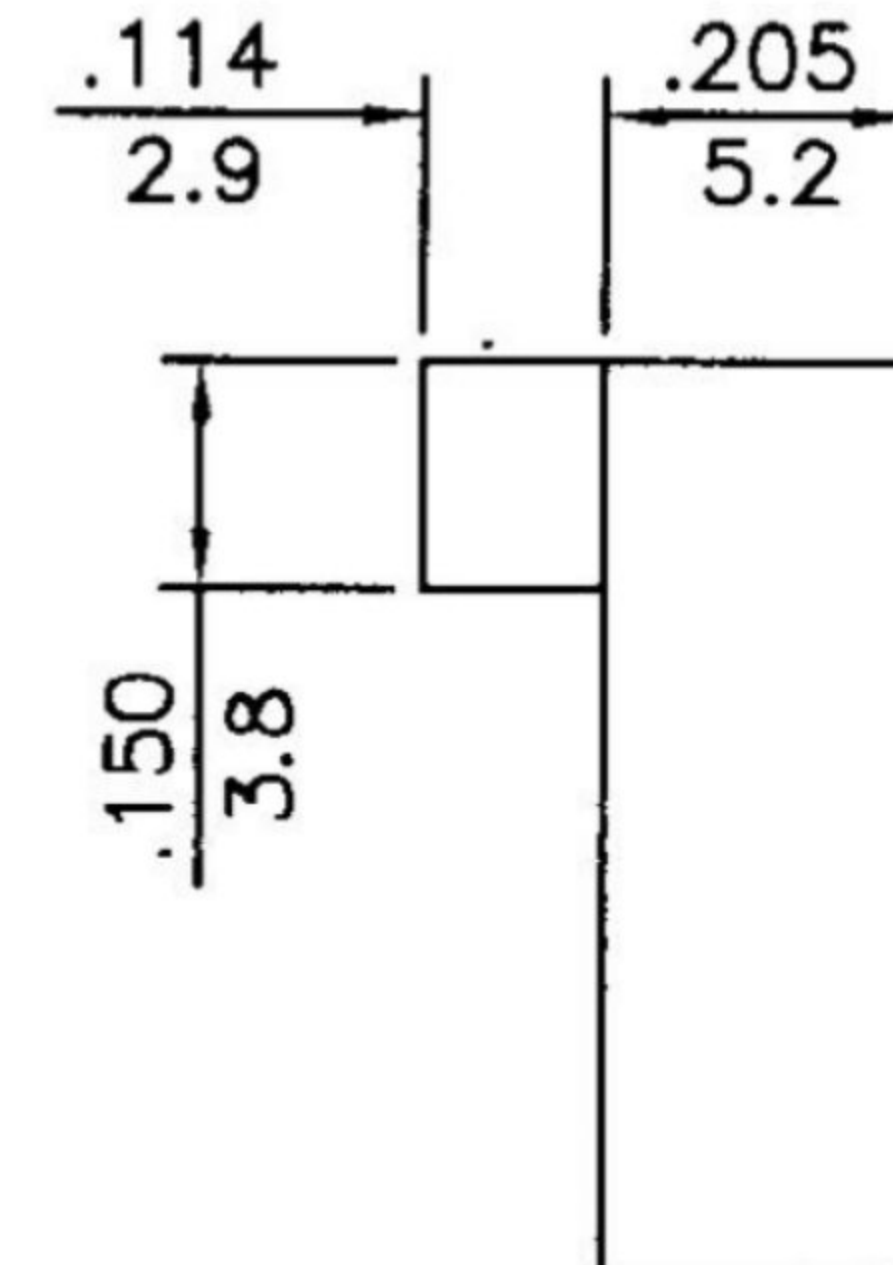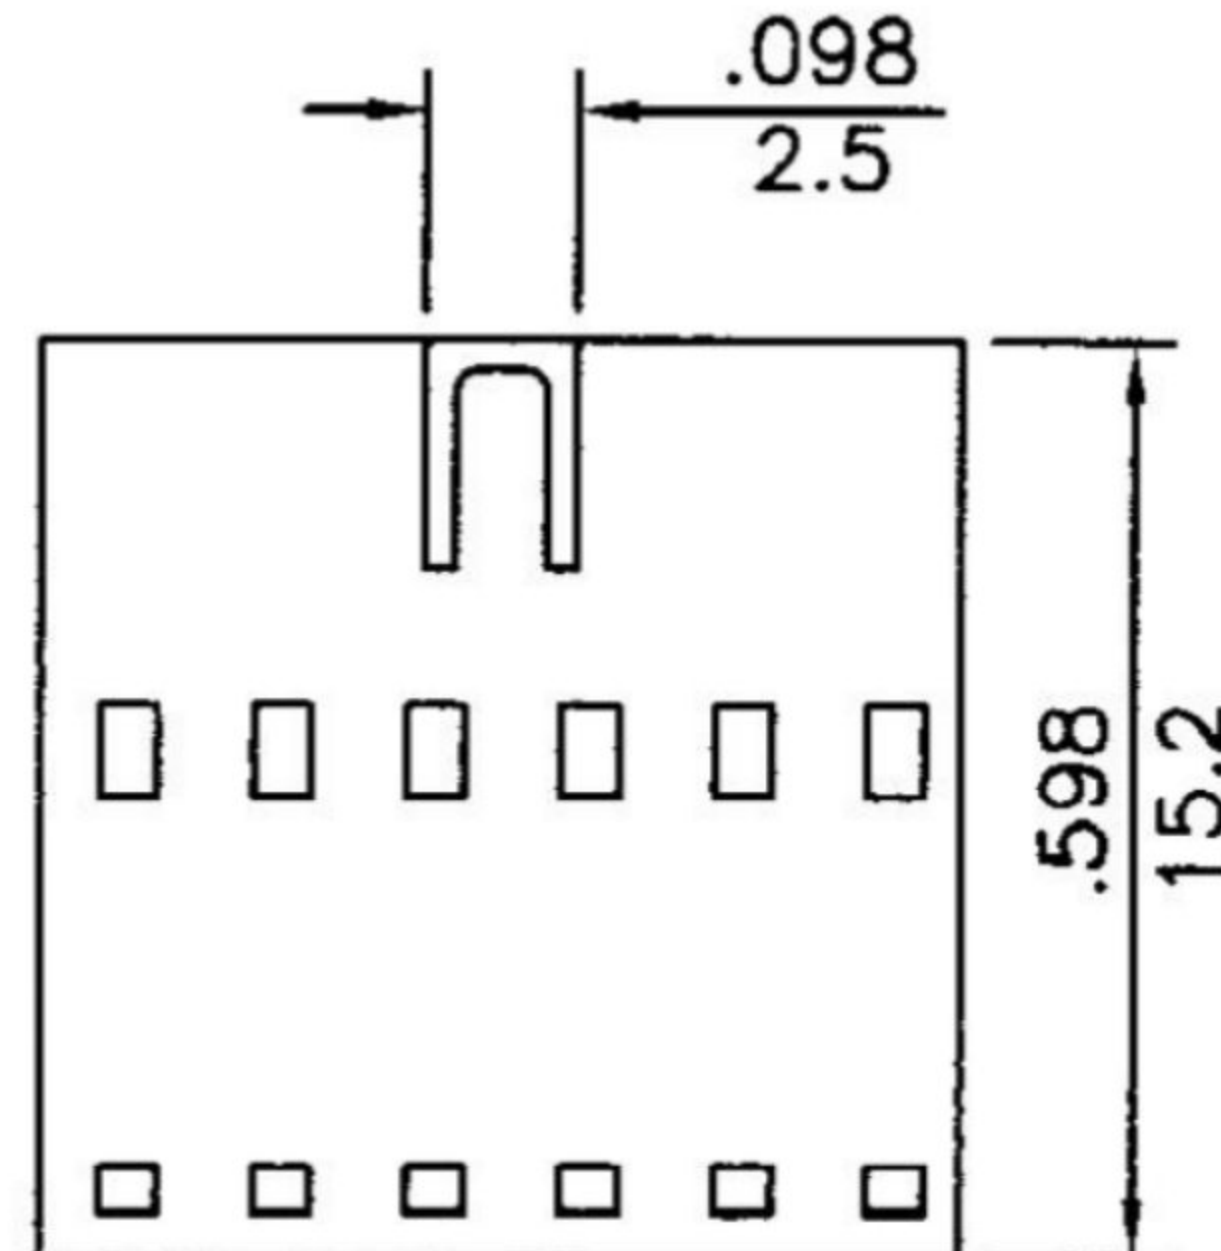

- \* Poles:2\*2~2\*40
  - \* Material : PBTP UL94V-0, BLACK
- Specifications
- \* Current rating : 3A AC, DC
  - \* Voltage rating : 250V AC, DC
  - \* Temperature range : -25°C~+85°C
  - \* Insulation resistance : 1,000MΩ min.
  - \* Withstand voltage : 1,000AC/minute

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± .000 ±	PART NAME 品名 MX2.54mm HOUSING DUAL ROW 2XXXP WITH BUMP & WITHOUT BUMP BLACK INSULATOR ROHS (MOLEX 70450 SERIES)
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 H7070-XXPXB000R
DATE 制表日 2015/12/16	PAGE 張數 1 OF 1	REV. 版次 B	

1 2 3 4 5 6 7 8