
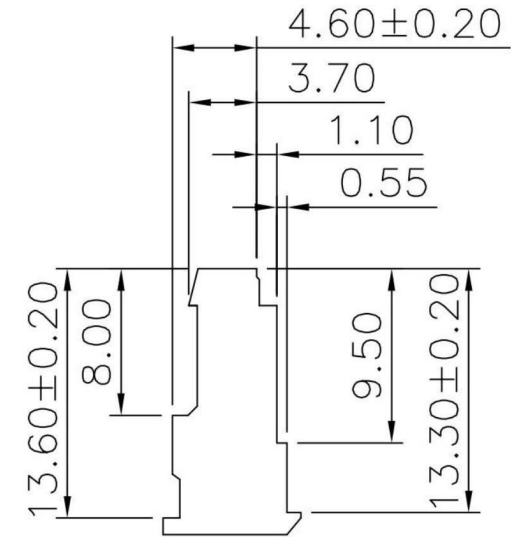
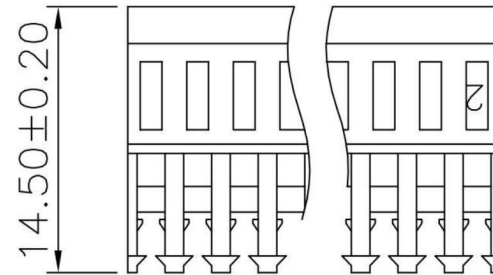


**FEATURES:**

- . 2-28 Circuits
- . With locking ramp
- . Housing Material: Nylon 66, [UL 94-2]
- . Terminal Material: Brass
- . Mates with .025" [0.64mm] pins
- . End type
- . Terminal retention to housing 6.6lbs [3.0kg] minimum

**SPECIFICATIONS:**

- . Current rating: 3A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max. After environmental testing /20mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand voltage: 1500V AC/minute
- . Applicable wire: AWG #22 ~ #28

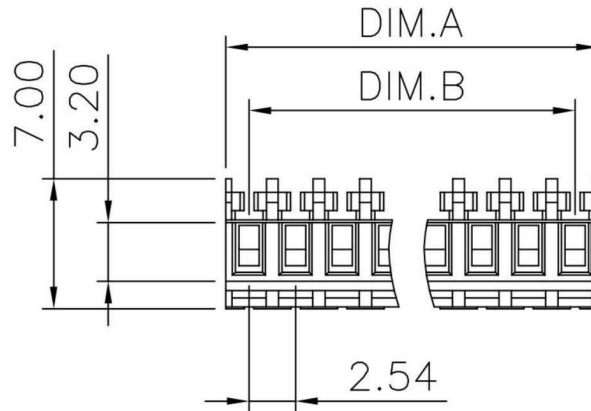

PIN數	DIM.A	DIM.B	Tolerances
02	5.08	2.54	±0.20
03	7.62	5.08	
04	10.16	7.62	
05	12.70	10.16	
06	15.24	12.70	
07	17.78	15.24	
08	20.32	17.78	
09	22.86	20.32	±0.25
10	25.40	22.86	
11	27.94	25.40	
12	30.48	27.94	
13	33.02	30.48	

PIN數	DIM.A	DIM.B	Tolerances
14	35.56	33.02	±0.30
15	38.10	35.56	
16	40.64	38.10	
17	43.18	40.64	
18	45.72	43.18	
19	48.26	45.72	±0.35
20	50.80	48.26	
21	53.34	50.80	
22	55.88	53.34	
23	58.42	55.88	
24	60.96	58.42	±0.38
25	63.50	60.96	
26	66.04	63.50	
27	68.58	66.04	
28	71.12	68.58	

**General Tolerances (unless specified)**

Cable use only	5~500 ±5mm	X.X ±0.20
	500~1000 ±10mm	X.XX ±0.10
	1000~1500 ±15mm	X.XXX ±0.05
	1500~2000 ±20mm	Angle
		X ± 2°
		X.X ± 1°

<p>RoHS Compliant</p>		<p><b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准 HELEN</p>	<p>SCALE 比例 參考</p>	<p>TOLERANCE 容許公差 0 ± .00 ± .000 ±</p>	<p>PART NAME 品名 2.54mm HOUSING XXP XXAWG TIN PLATED (UL94V2) WHITE COLOR CLOSE END TYPE ROHS</p>
<p>DWG. 製圖 ABBY</p>	<p>UNIT 單位 MM</p>	<p>SIZE. 紙張尺寸 A4</p>	<p>PART NO. 料號 H8254-XXPXTW00R</p>
<p>DATE 制表日 2015/09/30</p>	<p>PAGE 張數 1 OF 1</p>	<p>REV. 版次 B</p>	