
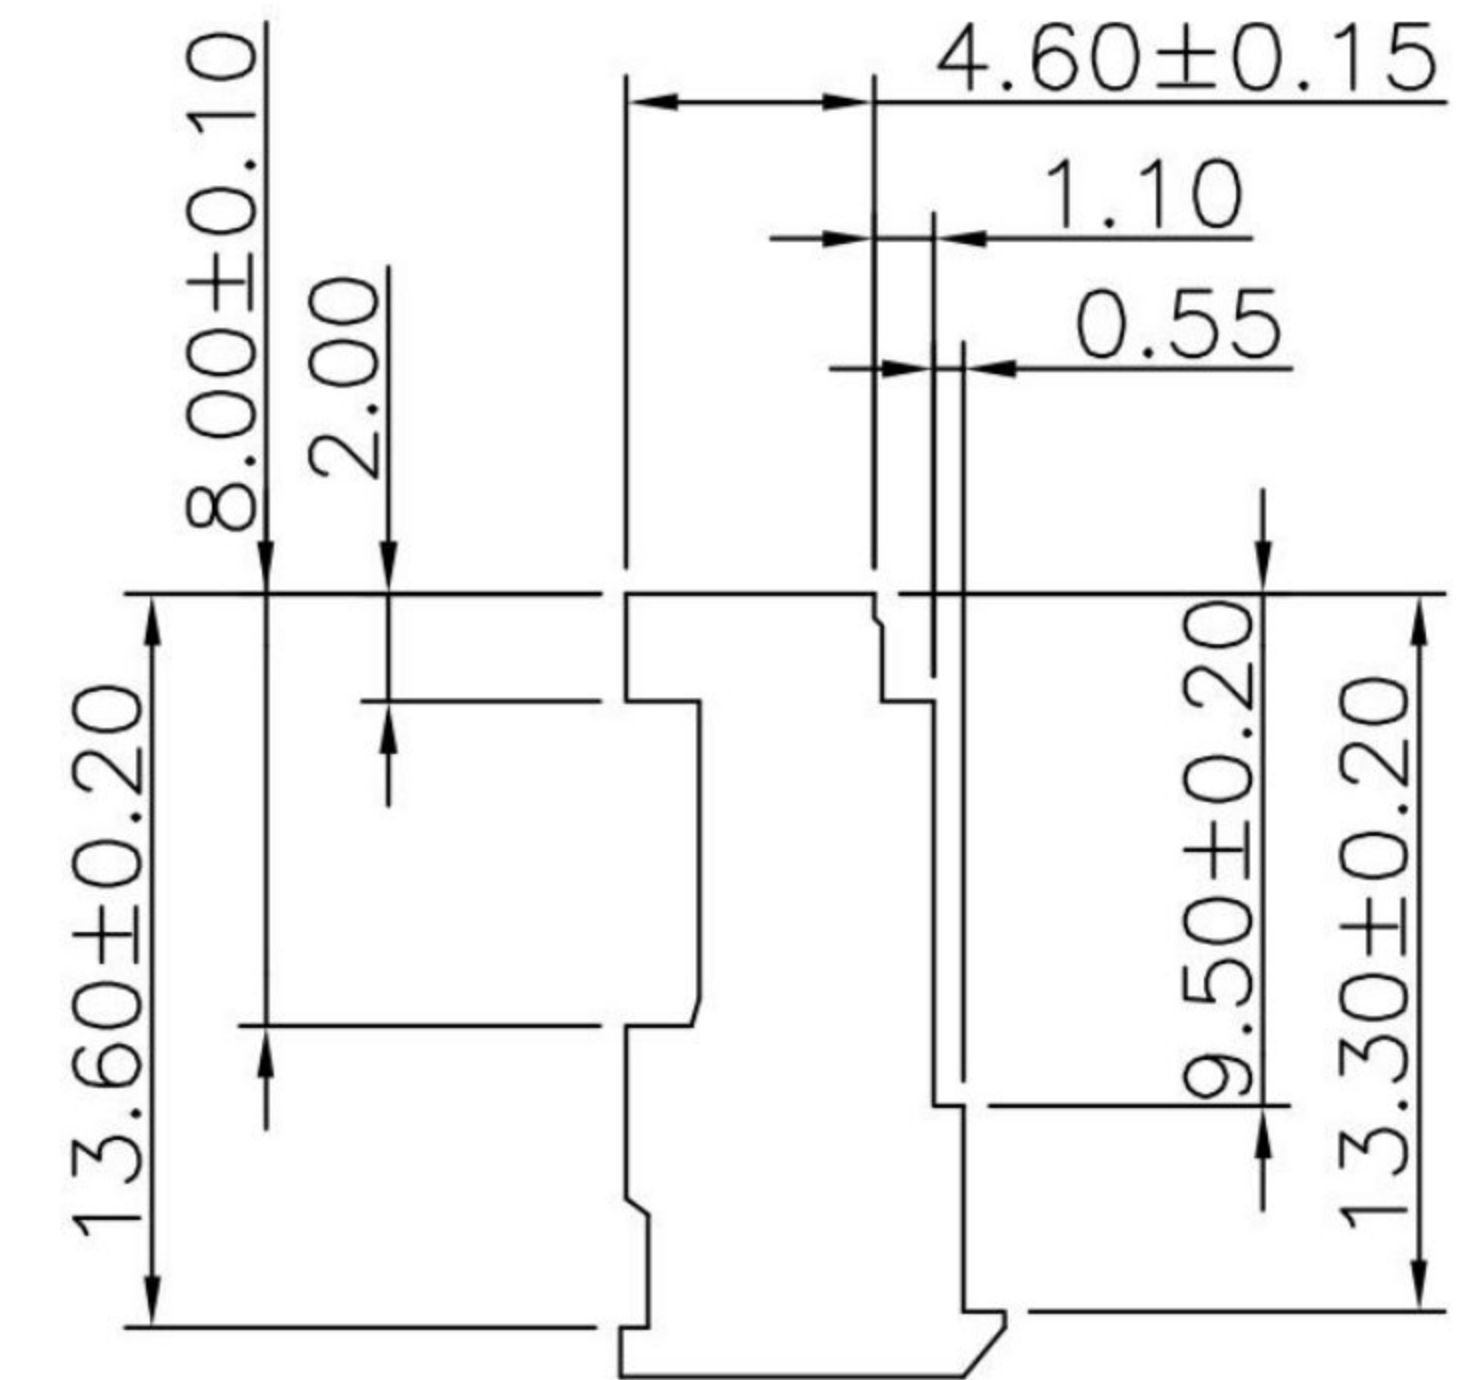


FEATURES:

- . 2-28 Circuits
- . With locking ramp and Polarizing Rib
- . Nylon 66, UL 94V-2, Nature
- . Mates with .025" [0.64mm] pins
- . End type
- . Terminal retention to housing 6.6lbs [3.0kg] minimum

SPECIFICATIONS:

- . Current rating: 3A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -40°C ~ +105°C .
- . Contact resistance: Initial Value/10m Ω max.
After environmental testing /20m Ω max.
- . Insulation resistance: 1000 M Ω min
- . Withstand voltage: 1500V AC/minute
- . Applicable wire: AWG #22 ~ #28

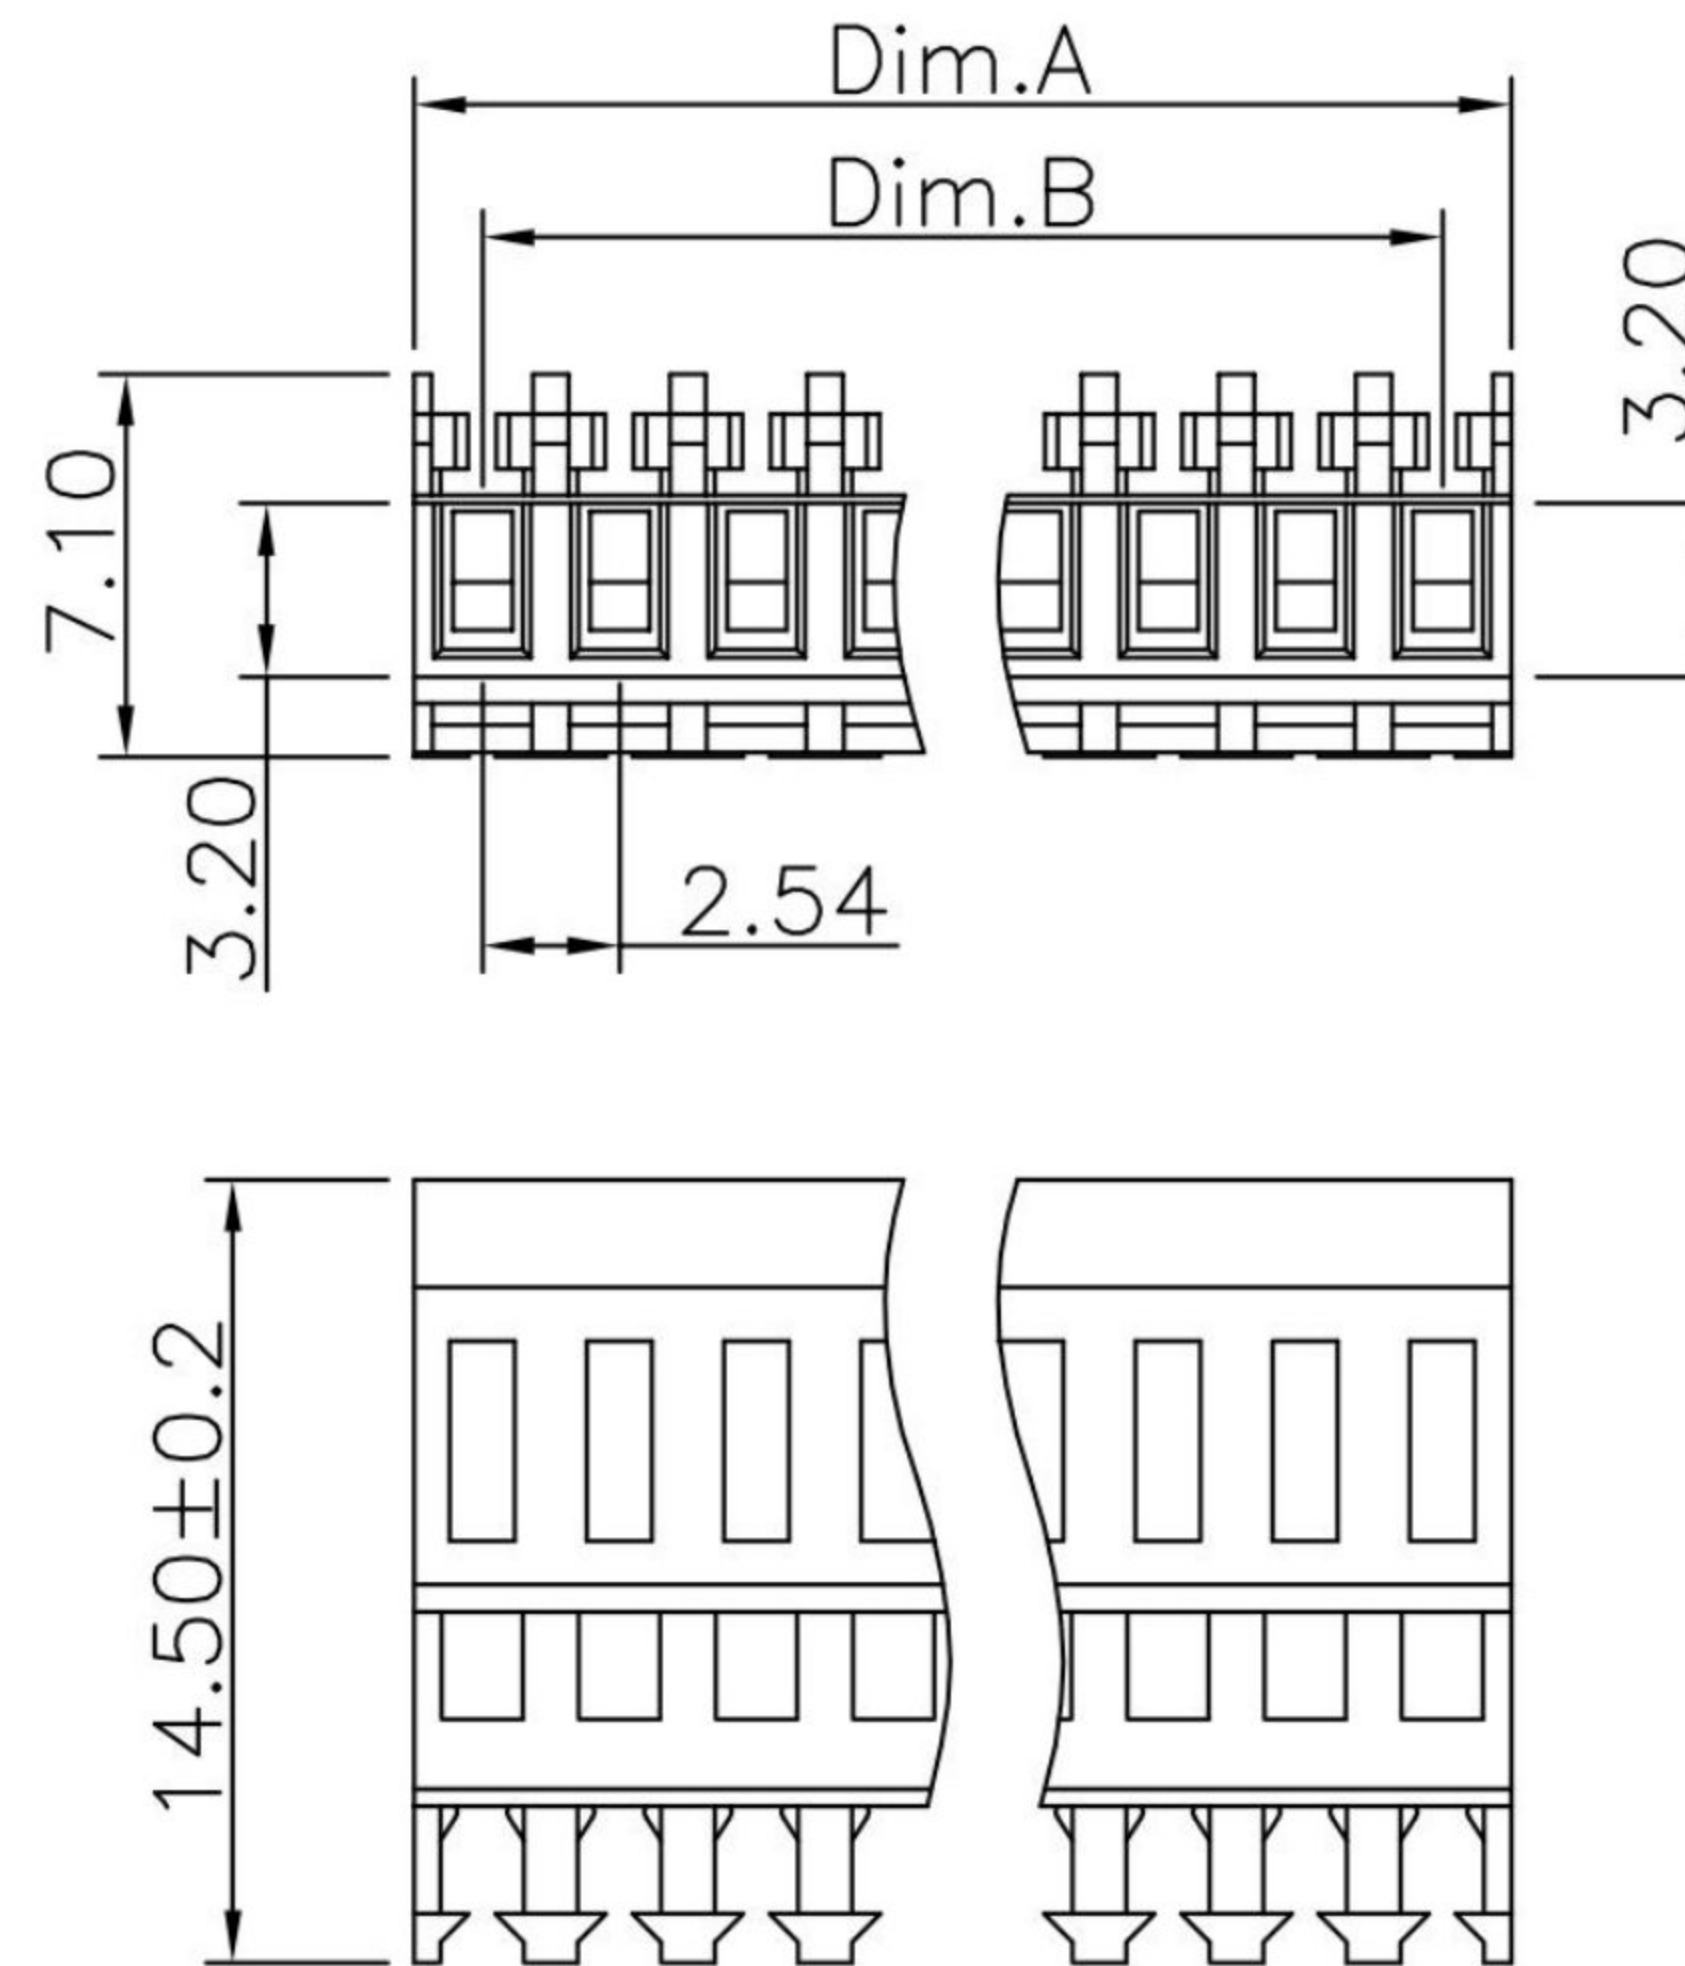

PIN數	DIM.A	DIM.B	Tolerances
02	5.08	2.54	±0.20
03	7.62	5.08	
04	10.16	7.62	
05	12.70	10.16	
06	15.24	12.70	
07	17.78	15.24	±0.25
08	20.32	17.78	
09	22.86	20.32	
10	25.40	22.86	
11	27.94	25.40	
12	30.48	27.94	
13	33.02	30.48	

PIN數	DIM.A	DIM.B	Tolerances
14	35.56	33.02	±0.30
15	38.10	35.56	
16	40.64	38.10	
17	43.18	40.64	
18	45.72	43.18	
19	48.26	45.72	±0.35
20	50.80	48.26	
21	53.34	50.80	
22	55.88	53.34	
23	58.42	55.88	
24	60.96	58.42	
25	63.50	60.96	
26	66.04	63.50	±0.38
27	68.58	66.04	
28	71.12	68.58	

General Tolerances (unless specified)

Cable use only	5~500 ±5mm	X.X ±0.20
	500~1000 ±10mm	X.XX ±0.10
	1000~1500 ±15mm	X.XXX ±0.05
	1500~2000 ±20mm	Angle X ± 2° X.X ± 1'

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	TOLERANCE 容許公差 .0 ± .00 ± ANG ±	PART NAME 品名 2.54mm HOUSING XXP TIN PLATED WHITE COLOR(UL94V2) W/ POLARIZING TAB CLOSE END TYPE ROHS
DWG. 製圖 ABBY		
DATE 制表日 2015/12/09	SCALE 比例 參考	PART NO. 料號 H8254-XXPXTW10R
	UNIT 單位 MM PAGE 張數 1 OF 1 REV. 版次 B	