


**FEATURES:**

- . 02~25 Circuits
- . Nylon [UL 94V-2]
- . Cover Type

**SPECIFICATIONS:**

- . Current rating: 7A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -40°C ~ +105°C .
- . Insulation resistance: 1000 M Ω min
- . Withstand Voltage: 1500V AC/minute
- . Applicable wire: AWG #18 ~ #26

Circuits	DIM.A	DIM.B	Circuits	DIM.A	DIM.B
02	7.92	3.96	14	55.44	51.48
03	11.88	7.92	15	59.40	55.44
04	15.84	11.88	16	63.36	59.40
05	19.80	15.84	17	67.32	63.36
06	23.76	19.80	18	71.28	67.32
07	27.72	23.76	19	75.24	71.28
08	31.68	27.72	20	79.20	75.24
09	35.64	31.68	21	83.16	79.20
10	39.60	35.64	22	87.12	83.16
11	43.56	39.60	23	91.08	87.12
12	47.52	43.56	24	95.04	91.08
13	51.48	47.52	25	99.00	95.04

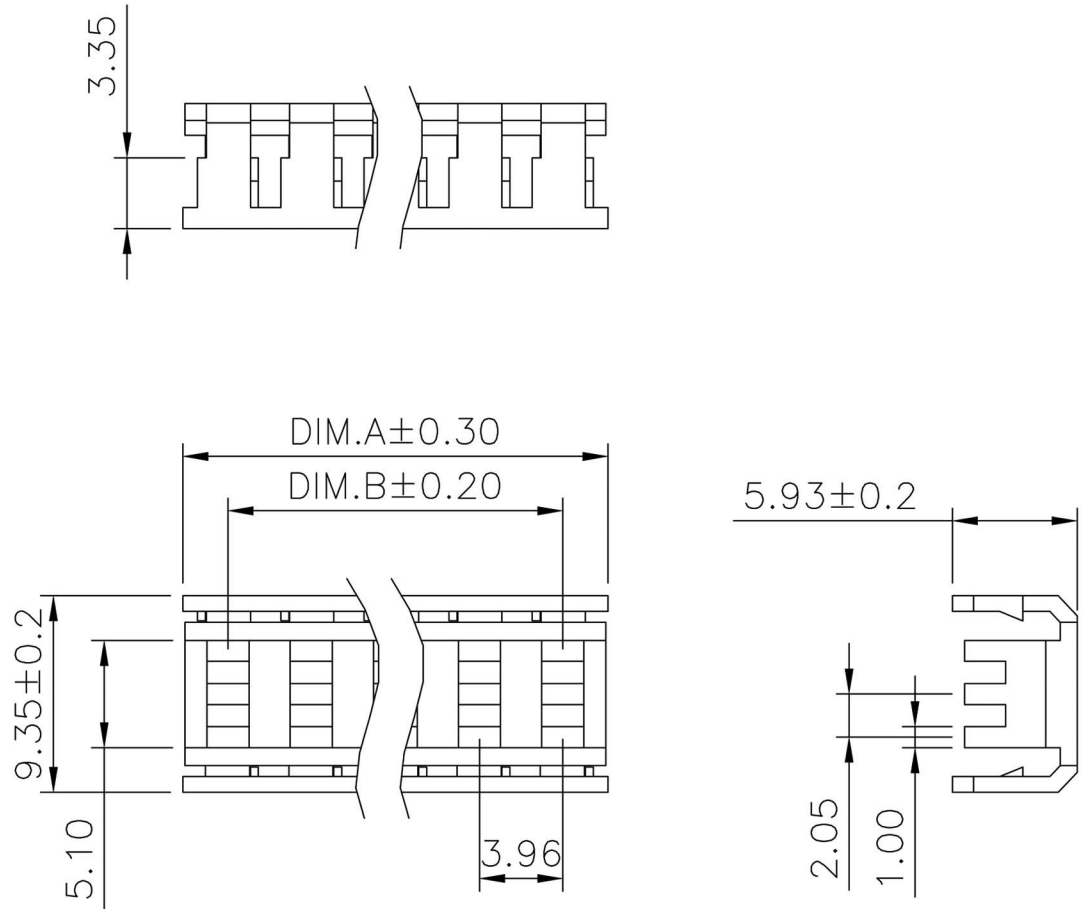

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b>	
		<b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准		TOLERANCE X.X ±0.20 X.XX ±0.10 X.XXX ±0.05 Angle X ± 2° X.X ± 1'	PART NAME 品名
DWG. 製圖	Hedy	SCALE 比例 參考	3.96mm HOUSING XXPC COVER WHITE COLOR FOR (CLOSED END TYPE & FEED THROUGH TYPE) ROHS
DATE 制表日	2020/01/07	UNIT 單位 MM	PART NO.
		PAGE 張數 1 / 1	料號 H8396-XXPC0W00R
		REV. 版次 C	