
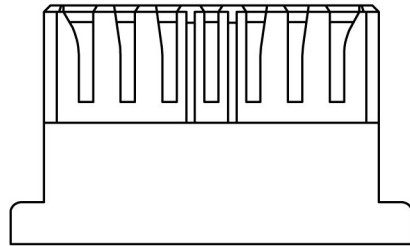
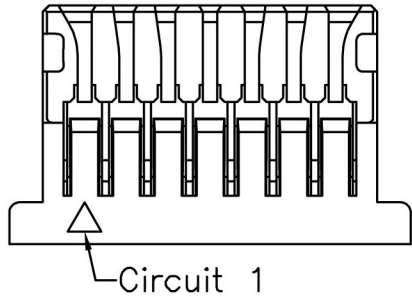


\* MAT'L: PA66 UL94V-0

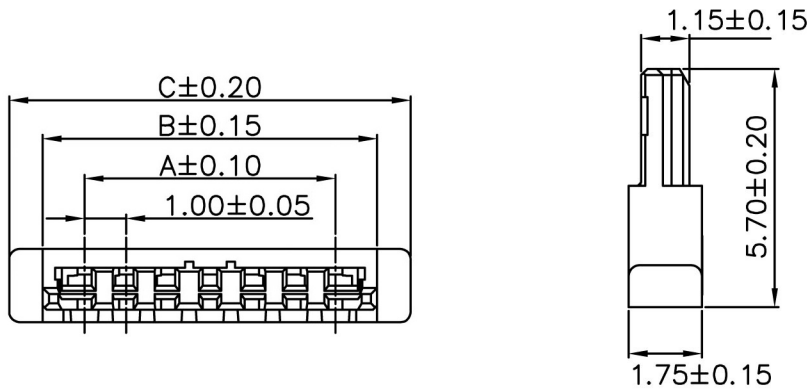

Specifications:

Current Rating: 1A AC, DC

Voltage Rating: 50V AC, DC

Operating Temp: -25°C~+85°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 100MΩ Min.

Dielectric Withstanding Voltage: 500V AC/min

PIN	DIM (mm)		
	A	B	C
02	—	3.00	4.60
05	4.00	6.00	7.60
06	5.00	7.00	8.60
07	6.00	8.00	9.60
14	13.00	15.00	16.60
16	15.00	17.00	18.60
20	19.00	21.00	22.60
22	21.00	23.00	24.60
26	25.00	27.00	28.60
30	29.00	31.00	32.60

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 <b>Hedy</b>		TOLERANCE TYPE ±0.4 ±0.5 PARTITION 20-40 40 UP TYPE ±0.2 ±0.3 PARTITION 1-10 10-20	PART NAME 品名 1.0mm HOUSING 1XXXP WHITE COLOR NYLON66 UL94V-0 ROHS
DWG. 製圖 <b>Helen</b>	SCALE 比例 參 考	UNIT 單位 M M	SIZE 紙張尺寸 A 4
DATE 制表日 2020/07/21	PAGE 張數 1 / 1	REV. 版次 A	PART NO. 料 號 H9017-XXPW1000R