


■ **HOUSING**

- Material: Thermal Plastic, UL 94V-0
- Pitch: 1.00mm (.039")

■ **NOTE:**

- Current Rating:1A AC,DC.
- Voltage Rating:50V AC,DC.
- Operating Temp:-25°C ~ 85°C.
- Insulation Resistance:100MΩ Min.
- Dielectric Withstanding Voltage:500V AC /minute.
- Contact Resistance:30mΩ Max.
- Operating Humidity:40% ~ 80%

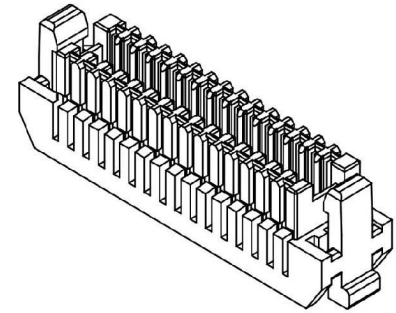

CIRCUITS	DIMENSION				
	A	B	C	D	E
6	2.00	8.7	7.70	4.35	3.70
10	4.00	10.7	9.70	6.35	5.70
12	5.00	11.7	10.70	7.35	6.70
20	9.00	15.7	14.70	11.35	10.70
40	19.00	25.7	24.70	21.35	20.70

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	 TOLERANCE LINEAR ± .x ±0.3 .xx ±0.15 .xxx ±0.08 ANGLES ± 7	PART NAME 品名 SHLD 1.0mm HOUSING 2XXXPIN WITHOUT SECURE LOCK TYPE MATERIAL:NYLON66 UL94V-0 WHITE COLOR ROHS
DWG. 製圖	Helen	UNIT 單位	SIZE. 紙張尺寸
DATE 制表日	2020/7/21	PAGE 張數	REV. 版次
		1 OF 1	B
		M M	A 4
			PART NO. 料號
			H9018-XXPNW1000R