

**Features:**

- Material: Phosphor bronze
- Used in H4030 series housing
- Wire range: #20 ~ #30 AWG
- Thickness: 0.2mm



**Specifications:**

- Current rating:


Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

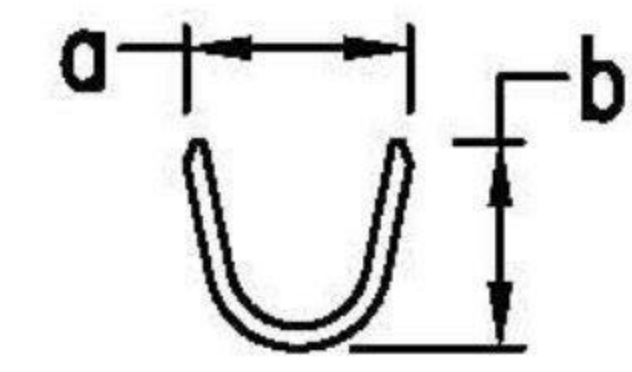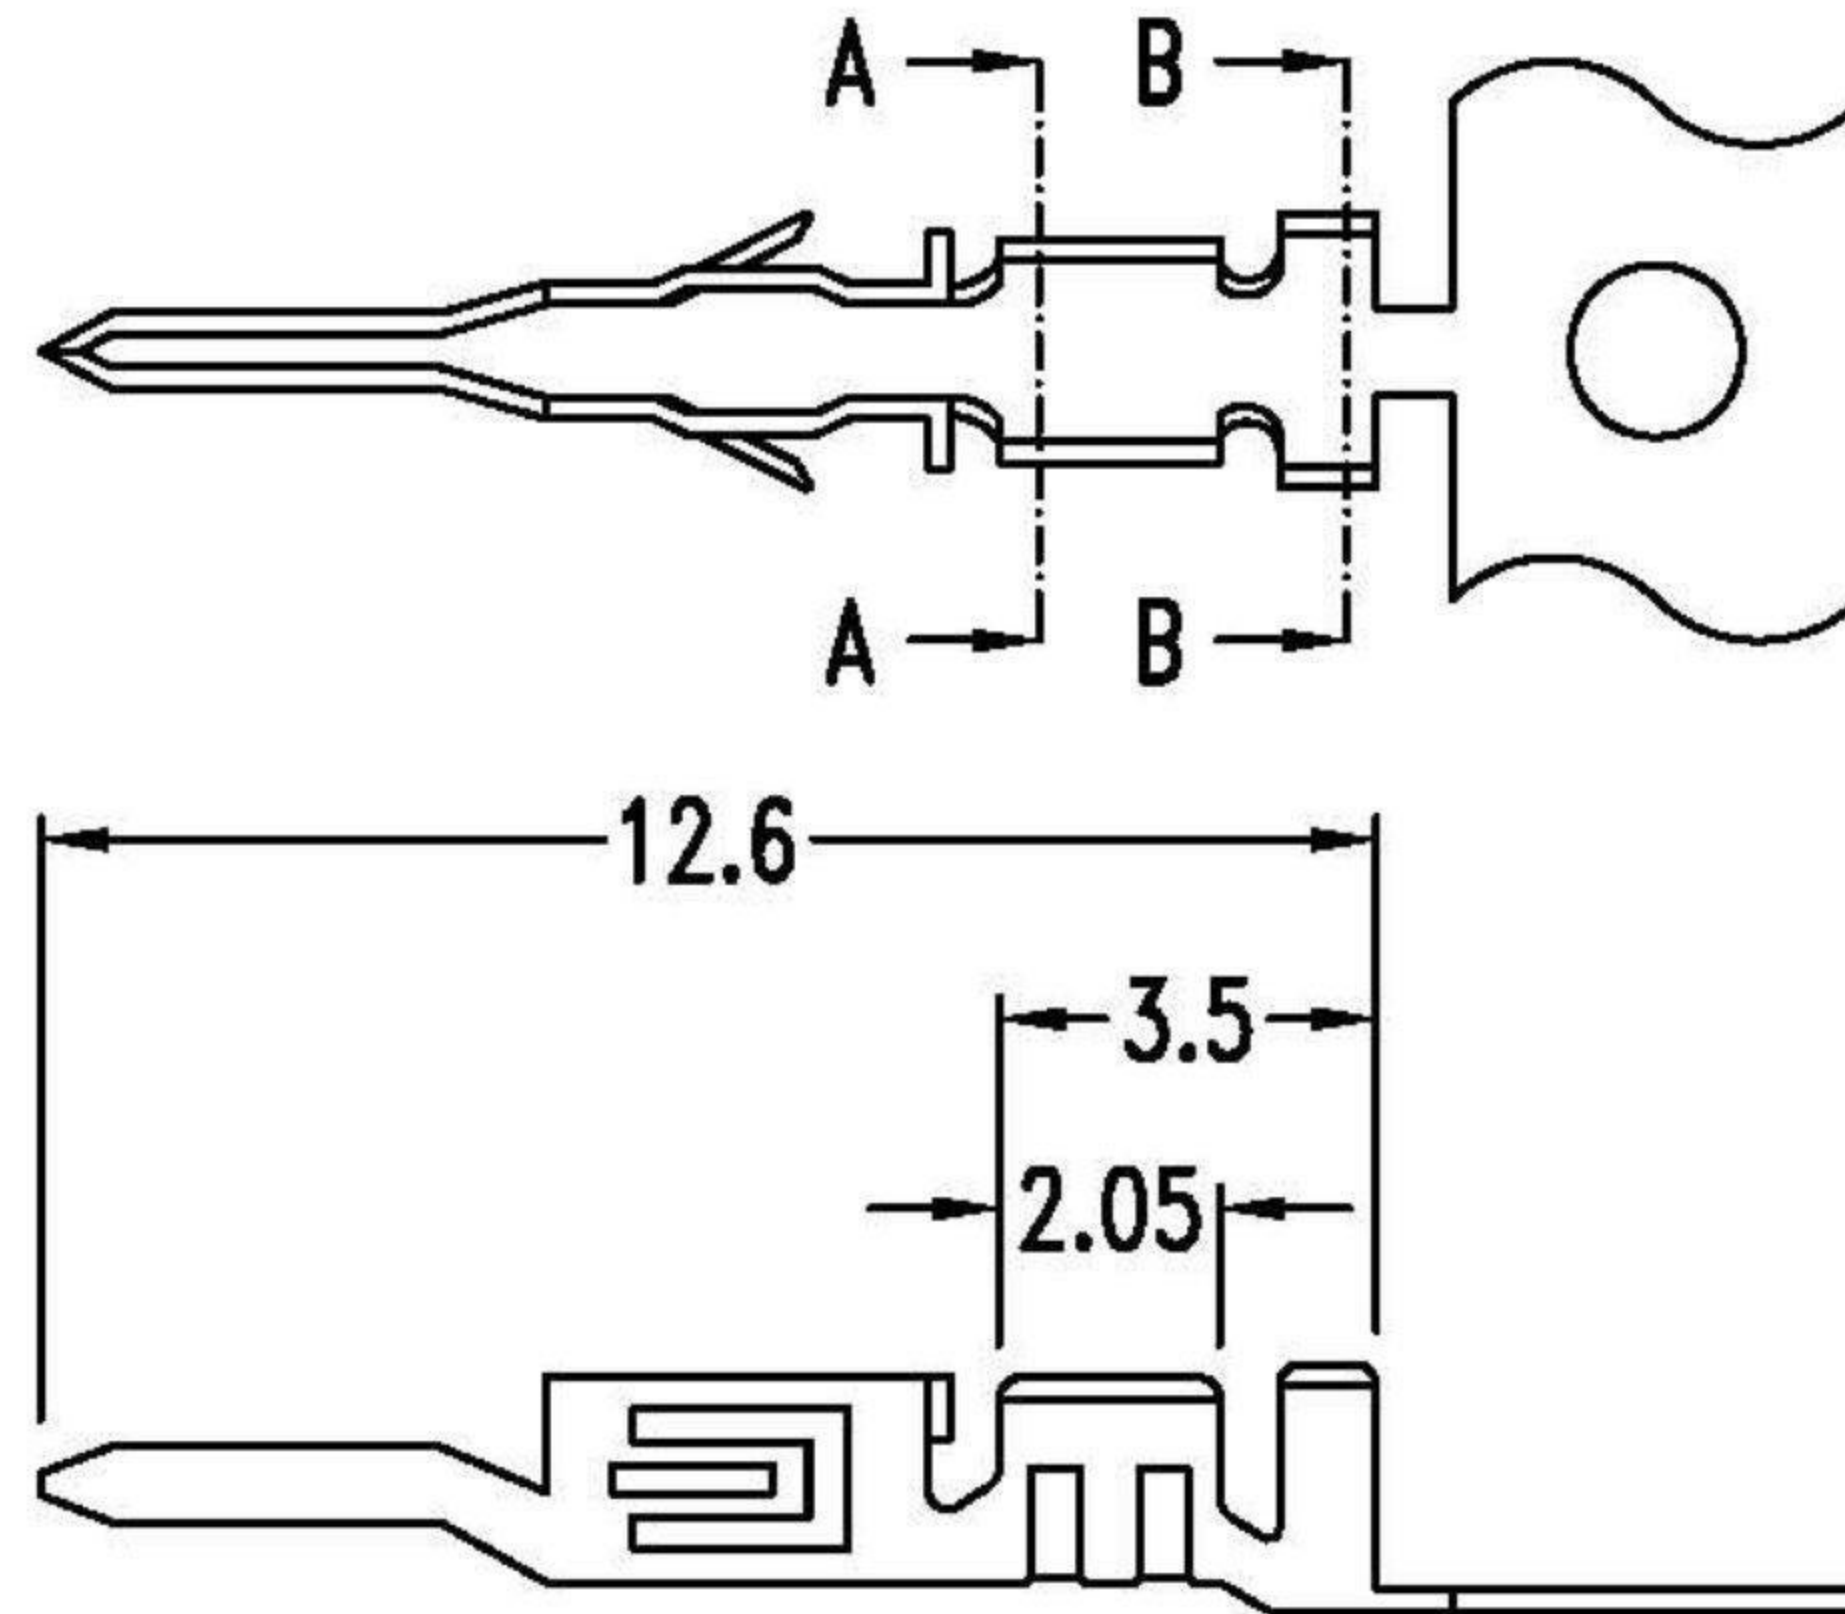

**SEC. A-A**

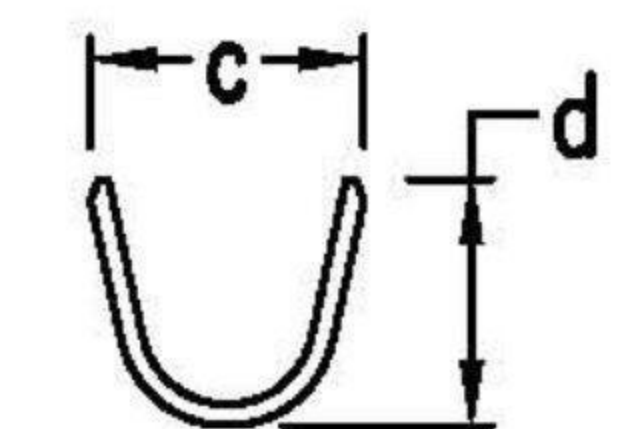

**SEC. B-B**

**Ordering Information**

Part No.	Finished	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
T4030-TPN00000R	Tin-plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9
T4030-SPN00000R	Gold flash in contact area. Others: Tin-plated					
T4030-GPN00000R	Gold flash					
T4030-TPG00000R	Tin-plated	#20 ~ #24 AWG	2.1	2.1	2.7	2.4
T4030-SPG00000R	Gold flash in contact area. Others: Tin-plated					
T4030-GPG00000R	Gold flash					

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 參考	TOLERANCE 容許公差 .000 ± 0.05 (mm) .00 ± 0.15 (mm) .0 ± 0.25 (mm)	PART NAME 品名 MICRO-FIT 3.0 MALE TERMINAL PHOSPHOR BRASS MATERIAL ROHS
DWG. 製圖 KAREN	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 T4030-XP(G, N)00000R
DATE 制表日 2013/05/10	PAGE 張數 1 OF 1	REV. 版次 A	