
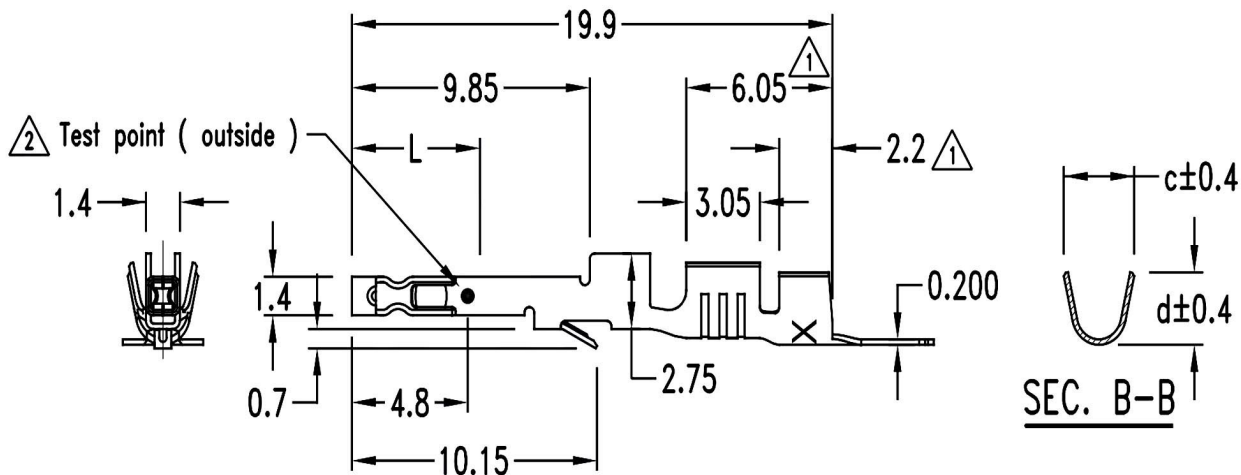


Features:

- Material: High conductivity copper alloy
- Wire range: #16 ~ #22 AWG

Specification:

- ⚠ • Current rating: 14A at #16 AWG for 2 poles
8A at #16 AWG for other poles
- Voltage rating: 400V AC (RMS) or 400V DC Max.
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1800V AC/minute
- Ambient temperature range: -40°C ~ 105°C

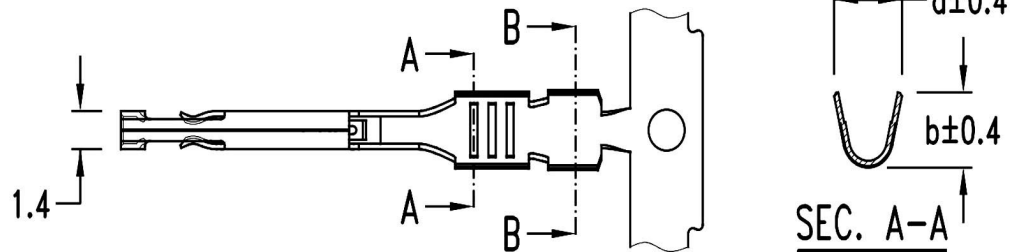

Wire range	Dim. a	Dim. b	Dim. c	Dim. d	Finished
#20 ~ #22	2.18	2.18	2.33	2.08	Tin-plated 100u" over copper 50u" ⚠
#16 ~ #18	2.8	2.7	2.9	2.63	

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
Betty
DATE 制表日
2019/03/15

UNLESS OTHERWISE SPECIFIED TOLERANCE
.000 ± 0.08 (mm)
.00 ± 0.25 (mm)
.0 ± 0.4 (mm)
SCALE 比例 參考
UNIT 單位 M M
PAGE 張數 1 OF 1
REV. 版次 A

PART NAME 品名
3.5mm Female Terminal
Material: High Conductivity Copper Alloy
Tin Plating Reel Packing ROHS
PART NO.
料號 T4352-THX00000R